



Floor standing unit

FVXS-F



Econo mode



Vertical auto swing



Weekly timer



Online controller
via app



VRV for residential
application

Floor standing unit for optimal heating comfort thanks to dual airflow

- › Its low height enables the unit to fit perfectly beneath a window
- › Can be installed against a wall or recessed
- › Vertical auto swing moves the discharge flaps up and down for efficient air and temperature distribution throughout the room

- › Online controller (optional): control your indoor from any location with an app, via your local network or internet

FVXS-F + RXS-L(3)



Indoor unit		FVXS	25F	35F	50F
Casing	Colour		White		
Dimensions	Unit	HeightxWidthxDepth	600x700x210		
Sound power level	Cooling/Heating		52/52		60/60
Sound pressure level	Cooling	High/Nom./Low/Silent operation	38/32/26/23	39/33/27/24	44/40/36/32
	Heating	High/Nom./Low/Silent operation	38/32/26/23	39/33/27/24	45/40/36/32
Control systems	Infrared remote control		ARC452A1		


Efficiency data		FVXS + RXS	25F + 25L3	35F + 35L3	50F + 50L	
Cooling capacity	Min./Nom./Max.	kW	1.3/2.5/3.0	1.4/3.5/3.8	1.4/5.0/5.6	
Heating capacity	Min./Nom./Max.	kW	1.3/3.4/4.5	1.4/4.5/5.0	1.4/5.8/8.1	
Power input	Cooling	Min./Nom./Max.	0.300/0.606/0.920	0.300/1.060/1.250	0.500/1.550/2.000	
	Heating	Min./Nom./Max.	0.290/0.770/1.390	0.310/1.190/1.880	0.500/1.600/2.600	
Seasonal efficiency (according to EN14825)	Cooling	Energy label		A+		
		Pdesign	kW	2.50	3.50	5.00
		SEER		5.74	5.60	5.89
	Heating (Average climate)	Annual energy consumption	kWh	152	219	297
		Energy label		A+	A	A
		Pdesign	kW	2.60	2.90	4.20
Nominal efficiency	EER		4.12	3.30	3.23	
		COP		4.42	3.78	3.63
	Annual energy consumption	kWh	303	530	775	
	Energy label	Cooling/Heating		A/A		

Outdoor unit		RXS	25L3	35L3	50L
Dimensions	Unit	HeightxWidthxDepth	550x765x285		735x825x300
Sound power level	Cooling		59	61	62
	Heating		59	61	62
Sound pressure level	Cooling	High/Low/Silent operation	46/-/43	48/-/44	48/44/-
	Heating	High/Low/Silent operation	47/-/44	48/-/45	48/45/-
Operation range	Cooling	Ambient Min.-Max.	°CDB		-10~46
	Heating	Ambient Min.-Max.	°CWB		-15~18
Refrigerant	Type/GWP		R-410A/2,087.5		
	Charge	kg/TCO ₂ eq	1.0/2.1	1.2/2.5	1.7/3.5
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/220-240		1~/50/220-230-240

EER/COP according to Eurovent 2012, for use outside EU only | Nominal efficiency: cooling at 35°/27° nominal load, heating at 7°/20° nominal load

Contains fluorinated greenhouse gases

Daikin Europe N.V. Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Responsible Editor)



ECPEN15-028

03/15



Daikin Europe N.V. participates in the Eurovent Certification programme for Liquid Chilling Packages (LCP), Air handling units (AHU), Fan coil units (FCU) and variable refrigerant flow systems (VRF) Check ongoing validity of certificate online: www.eurovent-certification.com or using: www.certiflash.com



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.

Floor standing unit

FVXS-F



Guaranteed
operation down to
-25°C

Floor standing unit for optimal heating comfort thanks to dual airflow, even at ambient temperatures **down to -25°C**

Econo mode

Vertical auto swing



Weekly timer

Online controller
via app

- › Its low height enables the unit to fit perfectly beneath a window
- › Can be installed against a wall or recessed
- › Vertical auto swing moves the discharge flaps up and down for efficient air and temperature distribution throughout the room
- › Online controller (optional): control your indoor unit from any location with an app, via your local network or internet

- › Guaranteed heating capacity at low ambient temperature, down to -25°C
- › Thanks to the unique free hanging coil technology, the defrost cycle is improved, resulting in lower running costs and no ice buildup

FVXS-F + RXL-M3



Indoor unit		FVXS	25F	35F
Casing	Colour		White	
Dimensions	Unit	HeightxWidthxDepth	mm	
			600x700x210	
Sound power level	Cooling/Heating		52/52	
Sound pressure level	Cooling	High/Nom./Low/Silent operation	38/32/26/23	39/33/27/24
	Heating	High/Nom./Low/Silent operation	38/32/26/23	39/33/27/24
Control systems	Infrared remote control		ARC452A1	


Efficiency data		FVXS + RXL	25F + 25M3	35F + 35M3
Cooling capacity	Min./Nom./Max.	kW	1.2/2.5/5.1	1.4/3.5/5.6
Heating capacity	Min./Nom./Max.	kW	1.0/4.5/6.5 / 3.4 (1)	1.1/5.6/7.0 / 3.8 (1)
Power input	Cooling	Min./Nom./Max.	0.250/0.740/1.920	0.250/1.070/2.120
	Heating	Min./Nom./Max.	0.250/1.190/2.330	0.250/1.620/2.650
Seasonal efficiency (according to EN14825)	Cooling	Energy label	A	
		Pdesign	2.50	3.50
		SEER	5.10	5.21
		Annual energy consumption	173	235
	Heating (Average climate)	Energy label	A+	
		Pdesign	3.20	3.60
		SCOP	4.04	3.80
		Annual energy consumption	1,109	1,326
	Heating (Cold climate)	SCOP	3.41	3.10
	Nominal efficiency	EER		3.38
COP			3.78	3.46
Annual energy consumption		kWh	370	535
Energy label		Cooling/Heating	A/A	

Outdoor unit		RXL	25M3	35M3
Dimensions	Unit	HeightxWidthxDepth	mm	
			550x858x330	
Sound power level	Cooling		61	
	Heating		61	
Sound pressure level	Cooling	High/Low	48/44	
	Heating	High/Low	49/45	
Operation range	Cooling	Ambient	Min.-Max.	°CDB
				-10~46
Refrigerant	Heating	Ambient	Min.-Max.	°CWB
				-25~18
Type/GWP	R-410A/2,087.5			
	Charge	kg/TCO ₂ eq	1/2.1	
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/220-240	

EER/COP according to Eurovent 2012, for use outside EU only | Nominal efficiency: cooling at 35°/27° nominal load, heating at 7°/20° nominal load
 (1) Maximum heating capacity at -15°C outdoor temperature

Contains fluorinated greenhouse gases

Daikin Europe N.V. Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Responsible Editor)



ECPEN15-033 03/15




Daikin Europe N.V. participates in the Eurovent Certification programme for Liquid Chilling Packages (LCP), Air handling units (AHU), Fan coil units (FCU) and variable refrigerant flow systems (VRF) Check ongoing validity of certificate online: www.eurovent-certification.com or using: www.certiflash.com



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.

Concealed ceiling unit

FDXS-F(9)

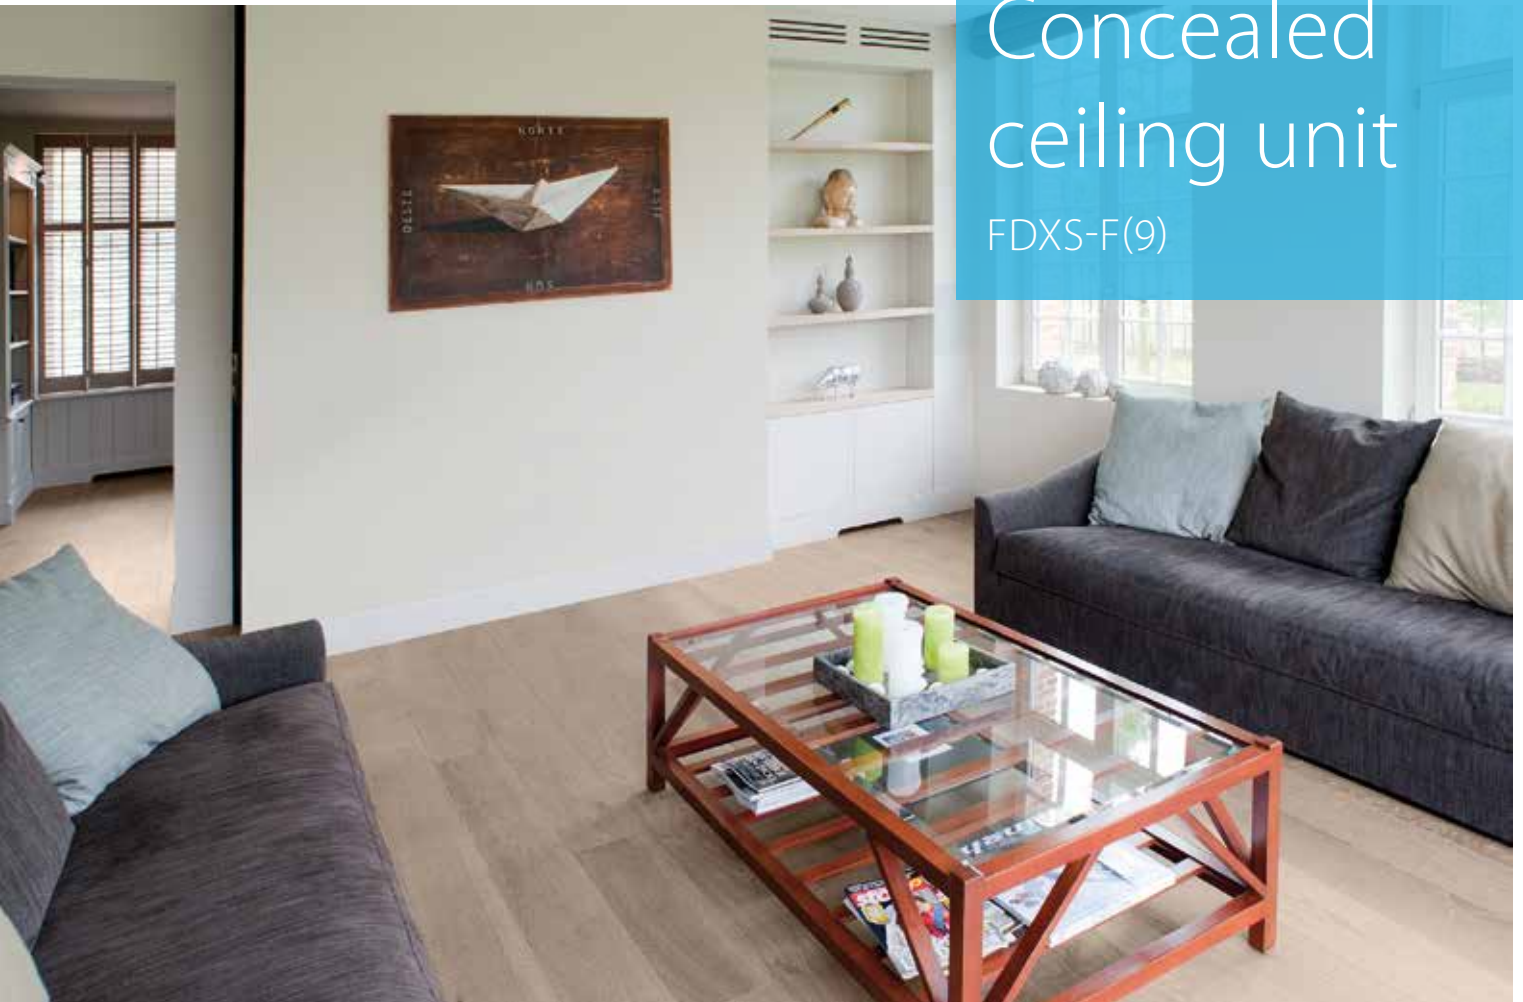

Fan only




Weekly timer



VRV for residential application

Compact concealed ceiling unit, with a height of only 200mm

› Compact dimensions, can easily be mounted in a ceiling void of only 240mm



- › Discretely concealed in the ceiling: only the suction and discharge grilles are visible
- › Low energy consumption thanks to DC fan motor
- › Medium external static pressure up to 40Pa facilitates unit use with flexible ducts of varying lengths

FDXS-F(9) + RXS-L(3)



Indoor unit		FDXS	25F	35F	50F9	60F
Dimensions	Unit	HeightxWidthxDpeth	200x750x620		200x1,150x620	
Sound power level	Cooling/Heating	dB(A)	53/53		55/55	56/56
Sound pressure level	Cooling	High/Nom./Low	35/33/27		38/36/30	
	Heating	High/Nom./Low	35/33/27		38/36/30	
Control systems	Wired remote control		BRC1E52A/B			

Efficiency data		FDXS + RXS	25F + 25L3	35F + 35L3	50F9 + 50L	60F + 60L	
Cooling capacity	Min./Nom./Max.	kW	1.3/2.4/3.0	1.4/3.4/3.8	1.7/5.0/5.3	1.7/6.0/6.5	
Heating capacity	Min./Nom./Max.	kW	1.3/3.2/4.5	1.4/4.0/5.0	1.7/5.8/6.0	1.7/7.0/8.0	
Power input	Cooling	Nom.	0.641	1.148	1.650	2.060	
	Heating	Nom.	0.800	1.150	1.870	2.180	
Seasonal efficiency (according to EN14825)	Cooling	Energy label	A+	A	A+	A	
		Pdesign	2.40	3.40	5.00	6.00	
		SEER	5.63	5.21	5.72	5.51	
	Heating (Average climate)	Annual energy consumption	kWh	149	228	306	381
		Energy label	A+			A	
		Pdesign	kW	2.60	2.90	4.00	4.60
Nominal efficiency	SCOP		4.24	3.88	3.93	3.80	
	Annual energy consumption	kWh	858	1,047	1,425	1,693	
	EER		3.74	2.96	3.03	2.91	
	COP		4.00	3.48	3.10	3.21	
Annual energy consumption	kWh	321	574	825	1,030		
Energy label	Cooling/Heating		A/A	B/A	B/D	C/C	

Outdoor unit		RXS	25L3	35L3	50L	60L
Dimensions	Unit	HeightxWidthxDpeth	550x765x285		735x825x300	
Sound power level	Cooling	dB(A)	59	61	62	
	Heating	dB(A)	59	61	62	
Sound pressure level	Cooling	High/Low/Silent operation	46/-/43	48/-/44	48/44/-	49/46/-
	Heating	High/Low/Silent operation	47/-/44	48/-/45	48/45/-	49/46/-
Operation range	Cooling	Ambient	Min.-Max.	-10~46		
	Heating	Ambient	Min.-Max.	-15~18		
Refrigerant	Type/GWP	R-410A/2,0875				
	Charge	kg/TCO ₂ eq	1.0/2.1	1.2/2.5	1.7/3.5	1.5/3.1
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/220-240		1~/50/220-230-240	

EER/COP according to Eurovent 2012, for use outside EU only | Nominal efficiency: cooling at 35°/27° nominal load, heating at 7°/20° nominal load

Contains fluorinated greenhouse gases

Daikin Europe N.V. Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Responsible Editor)



ECPEN15-029 03/15



Daikin Europe N.V. participates in the Eurovent Certification programme for Liquid Chilling Packages (LCP), Air handling units (AHU), Fan coil units (FCU) and variable refrigerant flow systems (VRF) Check ongoing validity of certificate online: www.eurovent-certification.com or using: www.certiflash.com



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.

Flexi type unit

FLXS-B(9)



Home leave operation



Indoor unit silent operation



Vertical auto swing



VRV for residential application



Online controller via app

Flexible unit, ideal for rooms without false ceiling, can fit on either ceiling or wall

- › Can fit on either ceiling or lower wall; its low height enables the unit to fit beneath a window
- › Vertical auto swing moves the discharge flaps up and down for efficient air and temperature distribution throughout the room
- › Home leave operation maintains the indoor temperature at your specified comfort level during absence, thus saving energy
- › Online controller (optional): control your indoor unit from any location via smartphone, laptop, pc, tablet or touch screen

FLXS-B(9) + RXS-L(3)



Indoor unit		FLXS	25B	35B9	50B	60B
Casing	Colour	Almond white				
Dimensions	Unit	HeightxWidthxDepth	mm			
			490x1,050x200			
Sound power level	Cooling/Heating		51/51	53/59	60/-	60/59
Sound pressure level	Cooling	High/Nom./Low/Silent operation	37/34/31/28	38/35/32/29	47/43/39/36	48/45/41/39
	Heating	High/Nom./Low/Silent operation	37/34/31/29	46/36/33/30	46/41/35/33	47/42/37/34
Control systems	Infrared remote control	ARC433B67				


Efficiency data		FLXS + RXS	25B + 25L3	35B9 + 35L3	50B + 50L	60B	
Cooling capacity	Min./Nom./Max.	kW	1.2/2.5/3.0	-/3.5/-	0.9/4.9/5.3	-	
Heating capacity	Min./Nom./Max.	kW	1.2/3.4/4.5	1.4/4.0/5.0	0.9/6.1/7.5	-	
Power input	Cooling	Min./Nom./Max.	kW	0.300/0.668/0.860	0.300/1.215/1.260	0.450/1.720/1.950	-
	Heating	Min./Nom./Max.	kW	0.290/0.960/1.490	0.290/1.120/1.850	0.310/1.820/3.540	-
Seasonal efficiency (according to EN14825)	Cooling	Energy label		A	B	A	Only available in multi model application
		Pdesign	kW	2.50	3.50	4.90	
		SEER		5.19	4.87	5.25	
	Heating (Average climate)	Annual energy consumption	kWh	169	252	326	
		Energy label		A			
		Pdesign	kW	2.50	2.90	4.20	
Nominal efficiency	EER		3.74	2.88	2.85		
		COP	3.54	3.57	3.35		
	Annual energy consumption	kWh	334	608	860		
		Energy label	Cooling/Heating	A/B	B/A		C/C

Outdoor unit		RXS	25L3	35L3	50L	60B	
Dimensions	Unit	HeightxWidthxDepth	mm				
			550x765x285				
Sound power level	Cooling		59	61	62	Only available in multi model application	
	Heating		59	61	62		
Sound pressure level	Cooling	High/Low/Silent operation	dBA	46/-/43	48/-/44		48/44/-
	Heating	High/Low/Silent operation	dBA	47/-/44	48/-/45		48/45/-
Operation range	Cooling	Ambient	Min.-Max.	°CDB	-10~46		
	Heating	Ambient	Min.-Max.	°CWB	-15~18		
Refrigerant	Type/GWP	R-410A/2,087.5					
	Charge	kg/TCO ₂ eq	1.0/2.1	1.2/2.5	1.7/3.5		
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/220-240		1~/50/220-230-240		

EER/COP according to Eurovent 2012, for use outside EU only | Nominal efficiency: cooling at 35°/27° nominal load, heating at 7°/20° nominal load

Contains fluorinated greenhouse gases

Daikin Europe N.V. Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Responsible Editor)



ECPEN15-030 03/15



Daikin Europe N.V. participates in the Eurovent Certification programme for Liquid Chilling Packages (LCP), Air handling units (AHU), Fan coil units (FCU) and variable refrigerant flow systems (VRF) Check ongoing validity of certificate online: www.eurovent-certification.com or using: www.certiflash.com



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.