

Multi model
application
Technical data book
3MXM-N9



3MXM40N2V1B9
3MXM52N2V1B9
3MXM68N2V1B9

Table of contents

3MXM-N9

1	Features	4
	3MXM-N9	4
2	Specifications	5
3	Electrical data	7
4	Combination table	8
5	Capacity tables	16
	Capacity Table Legend	16
6	Dimensional drawings	17
7	Centre of gravity	18
8	Piping diagrams	19
9	Wiring diagrams	20
	Wiring Diagrams - Single Phase	20
10	Sound data	21
	Sound Pressure Spectrum	21
11	Operation range	22

1 Features

1 - 1 3MXM-N9

- › Seasonal efficiency values up to A+++ in cooling and A++ in heating thanks to its up-to-date technology and built-in intelligence
- › Up to 3 indoor units can be connected to 1 multi outdoor unit; all indoor units are individually controllable and do not need to be installed in the same room or at the same time. They operate simultaneously within the same heating or cooling mode.
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Different types of indoor units can be connected: e.g. wall mounted, ceiling mounted cassette corner, concealed ceiling unit
- › Outdoor units are fitted with a swing compressor, renowned for its low noise and high energy efficiency



Inverter

2 Specifications

1 - 1 3MXM-N9

Technical specifications					3MXM40N9	3MXM52N9	3MXM68N9	
Casing	Colour				Ivory white			
Dimensions	Unit	Height	mm		734			
		Width	mm		958			
		Depth	mm		340			
	Packed unit	Height	mm		820			
		Width	mm		1,050			
		Depth	mm		480			
Weight	Unit			kg	57.0	62.0		
	Packed unit			kg	61.0	66.0		
Heat exchanger	Length		mm		920			
	Rows	Quantity				2		
	Fin pitch		mm		1.40			
	Stages	Quantity				32		
	Passes	Quantity				6.4		
	Tube type				Hi-XA			
	Tube diameter		mm		8			
	Fin	Type			WHS8 FIN-HYDROPHILIC			
		Treatment				Anti-corrosion treatment		
Fan	Type				Propeller			
	Air flow rate	Cooling	High	m³/min	42.0	46.5		
				cfm	1,483	1,642		
			Nom.	m³/min	42.0	42.5		
				cfm	1,483	1,501		
			Silent operation	m³/min	24.0	24.1		
				cfm	847	851		
		Heating	High	m³/min	41.0	43.8		
				cfm	1,447	1,547		
			Nom.	m³/min	41.0	43.8		
				cfm	1,447	1,547		
			Silent operation	m³/min	24.0	24.1		
				cfm	847	851		
	Fan motor	Quantity				1		
		Model				D55F-31		
Output		W		55				
Speed		Cooling	High	rpm	700	760		
			Medium	rpm	700			
			Super low	rpm	420			
		Heating	High	rpm	680	720		
			Super low	rpm	420			
			Medium	rpm	680	720		
Compressor	Quantity				1			
	Model				2YC40JXD#C	2YC71DXD#C		
	Oil Amount		cm³		650	900		
	Type				Hermetically sealed swing compressor			
	Output		W		1,300	2,400		
	Oil Type				FW68DA			
Operation range	Cooling	Ambient	Min.	°CDB	-10			
			Max.	°CDB	46			
	Heating	Ambient	Min.	°CDB	-15			
			Max.	°CDB	24			
Sound power level	Cooling			dBA	59.0	61.0		
	Heating			dBA	59.0	61.0		
Sound pressure level	Cooling	Nom.			dBA	46.0	48.0	
Refrigerant	Type				R-32			
	Charge		kg		1.80	2.00		
	Charge		TCO2Eq		1.22	1.35		
	GWP				675.0			

2 Specifications

1 - 1 3MXM-N9

2

Technical specifications				3MXM40N9	3MXM52N9	3MXM68N9
Piping connections	Liquid	Quantity			3	
		OD	mm		6,35	
	Gas	Quantity			1	
		OD	mm		9.50	
	Drain	Quantity			1	
		OD	mm		16	
	Gas 2	Quantity			2	
		OD	mm		12.70	
	Piping length	OU - IU	Min.	m	3 (1)	
			Max.	m	25 (1)	
		System	Chargeless	m	30	
	Additional refrigerant charge		kg/m	0.02 (for piping length exceeding 30m)		
	Level difference	IU - OU	Max.	m	15.0	
	IU - IU		m	7.5		
Total piping length	System	Actual	m	50		
Capacity control	Method			Variable (inverter)		

Standard accessories: Installation manual; Quantity: 1;

Standard accessories: Screw bag; Quantity: 1;

Standard accessories: Drain plug; Quantity: 1;

Standard accessories: Reducer assembly; Quantity: 1;

Standard accessories: Drain cap (1); Quantity: 6;

Standard accessories: Drain cap (2); Quantity: 3;

Electrical specifications				3MXM40N9	3MXM52N9	3MXM68N9
Power supply	Phase				1~	
	Frequency		Hz		50	
	Voltage		V		220-240	
Wiring connections	For power supply	Quantity			3	
		Remark			Earth wire included	
	For connection with indoor	Quantity			4	
		Remark			Earth wire included	

(1)For one room |

See separate drawing for operation range |

See separate drawing for electrical data |

Contains fluorinated greenhouse gases

3 Electrical data

3 - 1 Electrical Data

3MXM-N9

Outdoor unit	Power supply			RA: indoor units (+10% safety factor) See note 5.		Other indoor units (+10% safety factor)		COMP		OFM	
	Hz	Voltage	Voltage range	MCA	MFA	MCA	MFA	RHz	RLA	kW	FLA
3MXM40N2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	17,88	20	19,95	20	-	2,9	0,056	0,37
	50	230							3,0		
	50	240							3,1		
3MXM52N2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	18,19	20	20,28	25	-	4,5	0,056	0,37
	50	230							4,7		
	50	240							4,9		
3MXM68N2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	20,80	25	23,97	25	-	8,0	0,056	0,37
	50	230							8,4		
	50	240							8,7		
4MXM68N2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	21,00	25	23,97	25	-	7,0	0,056	0,37
	50	230							7,3		
	50	240							7,6		
4MXM80N2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	21,46	25	25,64	32	-	8,5	0,075	0,50
	50	230							8,9		
	50	240							9,3		
5MXM90N2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	21,70	25	25,88	32	-	9,2	0,075	0,50
	50	230							9,6		
	50	240							10,0		
3AMXM52M3V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	18,19	20	20,28	25	-	4,5	0,056	0,37
	50	230							4,7		
	50	240							4,9		
3MXF52A2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	18,19	20	20,28	25	-	4,5	0,056	0,37
	50	230							4,7		
	50	240							4,9		
3AMXF52A2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	18,19	20	20,28	25	-	4,5	0,056	0,37
	50	230							4,7		
	50	240							4,9		
3MXF68A2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	20,80	25	23,97	25	-	8,0	0,056	0,37
	50	230							8,4		
	50	240							8,7		

Notes

- 1) The ·RLA· is based on the following conditions.
Outdoor temperature ·35·°C DB
Indoor temperature ·27·°C DB / ·19·°C WB
- 2) Select the wire size according to the MCA.
- 3) The maximum allowable voltage that is unbalanced between phases is ·2·%.
- 4) Use a circuit breaker instead of a fuse.
- 5) Only for wall-mounted ·FVXM· units

Symbols

MCA: Minimum Circuit Ampere [A]
MFA: Maximum Fuse Ampere [A]
RLA: Rated load amps [A]
OFM: Outdoor fan motor
RHz: Rated operating frequency [Hz]
FLA: Full Load Ampere [A]
kW: Fan motor rated output [kW]

3D110208B

4 Combination table

4 - 1 Combination Table

3MXM40N9

Cooling ·(50Hz 230V)·

Outdoor unit	Indoor unit	Cooling capacity [kW]			Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room -A-	Room -B-	Room -C-	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	
3MXM40M2V1B 3MXM40M3V1B 3MXM40N2V1B 3MXM40N2V1B9	1.50	1.50	---	---	1.40	1.50	2.20	0.32	0.35	0.46	1.52	1.63	2.2	91
	2.00	2.00	---	---	1.40	2.00	2.90	0.32	0.48	0.71	1.52	2.28	3.4	91
	2.50	2.50	---	---	1.40	2.50	3.10	0.32	0.64	0.82	1.52	3.05	3.9	91
	3.50	3.50	---	---	1.40	3.50	4.10	0.32	0.98	1.19	1.52	4.68	5.7	91
	1.5+1.5	1.50	1.50	---	1.60	3.00	4.20	0.34	0.59	1.14	1.63	2.82	5.44	91
	1.5+2.0	1.50	2.00	---	1.60	3.50	4.20	0.34	0.71	1.12	1.63	3.40	5.33	91
	1.5+2.5	1.50	2.50	---	1.60	4.00	4.20	0.34	0.86	1.10	1.63	4.11	5.33	91
	1.5+3.5	1.20	2.80	---	1.60	4.00	4.20	0.34	0.85	1.08	1.63	4.07	5.33	91
	2.0+2.0	2.00	2.00	---	1.60	4.00	4.50	0.34	0.84	1.09	1.63	4.02	5.22	91
	2.0+2.5	1.78	2.22	---	1.60	4.00	4.50	0.34	0.83	1.07	1.63	3.97	5.22	91
	2.0+3.5	1.45	2.55	---	1.60	4.00	4.50	0.34	0.83	1.03	1.63	3.97	5.22	91
	2.5+2.5	2.00	2.00	---	1.60	4.00	4.50	0.34	0.83	1.05	1.63	3.97	5.22	91
	2.5+3.5	1.67	2.33	---	1.60	4.00	4.50	0.34	0.82	1.01	1.63	3.92	5.22	91
	3.5+3.5	2.00	2.00	---	1.60	4.00	4.50	0.34	0.82	0.99	1.63	3.92	5.11	91
	1.5+1.5+1.5	1.33	1.33	1.33	1.70	4.00	4.60	0.36	0.78	0.98	1.74	3.73	4.68	91
	1.5+1.5+2.0	1.20	1.20	1.60	1.70	4.00	4.60	0.36	0.77	0.96	1.74	3.68	4.68	91
	1.5+1.5+2.5	1.09	1.09	1.82	1.70	4.00	4.60	0.36	0.77	0.94	1.74	3.68	4.68	91
	1.5+1.5+3.5	0.92	0.92	2.15	1.70	4.00	4.60	0.36	0.76	0.90	1.74	3.64	4.68	91
	1.5+2.0+2.0	1.09	1.45	1.45	1.70	4.00	4.60	0.36	0.77	0.92	1.74	3.68	4.68	91
	1.5+2.0+2.5	1.00	1.33	1.67	1.70	4.00	4.60	0.36	0.76	0.91	1.74	3.64	4.68	91
	1.5+2.0+3.5	0.86	1.14	2.00	1.70	4.00	4.60	0.36	0.76	0.89	1.74	3.64	4.68	91
	1.5+2.5+2.5	0.92	1.54	1.54	1.70	4.00	4.60	0.36	0.76	0.87	1.74	3.64	4.68	91
	2.0+2.0+2.0	1.33	1.33	1.33	1.70	4.00	4.60	0.36	0.76	0.85	1.74	3.64	4.68	91
	2.0+2.0+2.5	1.23	1.23	1.54	1.70	4.00	4.60	0.36	0.76	0.83	1.74	3.64	4.68	91
	2.0+2.5+2.5	1.14	1.43	1.43	1.70	4.00	4.60	0.36	0.75	0.81	1.74	3.59	4.68	91

Heating ·(50Hz 230V)·

Outdoor unit	Indoor unit	Heating capacity [kW]			Total capacity [kW]			Power input [kW]			Total current [A]			
		Room	Room	Room	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	
3MXM40M2V1B 3MXM40M3V1B 3MXM40N2V1B 3MXM40N2V1B9	1.50	2.30	---	---	1.10	2.30	3.30	0.30	0.60	0.82	1.38	2.77	3.83	93
	2.00	2.70	---	---	1.10	2.70	3.70	0.30	0.76	1.23	1.38	3.51	5.75	93
	2.50	3.40	---	---	1.10	3.40	4.10	0.30	1.01	1.28	1.38	4.68	5.96	93
	3.50	4.20	---	---	1.10	4.20	4.80	0.30	1.42	1.71	1.38	6.60	7.98	93
	1.5+1.5	1.80	1.80	---	1.20	3.60	5.00	0.32	0.69	1.30	1.49	3.23	6.07	93
	1.5+2.0	1.54	2.06	---	1.20	3.60	5.00	0.32	0.69	1.28	1.49	3.23	5.96	93
	1.5+2.5	1.50	2.50	---	1.20	4.00	5.00	0.32	0.86	1.26	1.49	4.03	5.96	93
	1.5+3.5	1.38	3.22	---	1.20	4.60	5.00	0.32	0.98	1.22	1.49	4.59	5.96	93
	2.0+2.0	2.30	2.30	---	1.20	4.60	5.00	0.32	0.97	1.25	1.49	4.54	5.85	93
	2.0+2.5	2.04	2.56	---	1.20	4.60	5.00	0.32	0.98	1.23	1.49	4.59	5.85	93
	2.0+3.5	1.67	2.93	---	1.20	4.60	5.00	0.32	0.97	1.19	1.49	4.54	5.85	93
	2.5+2.5	2.30	2.30	---	1.20	4.60	5.00	0.32	0.96	1.21	1.49	4.49	5.85	93
	2.5+3.5	1.92	2.68	---	1.20	4.60	5.00	0.32	0.95	1.17	1.49	4.45	5.85	93
	3.5+3.5	2.30	2.30	---	1.20	4.60	5.00	0.32	0.94	1.15	1.49	4.40	5.75	93
	1.5+1.5+1.5	1.53	1.53	1.53	1.30	4.60	5.10	0.32	0.89	1.02	1.49	4.17	4.79	93
	1.5+1.5+2.0	1.38	1.38	1.84	1.30	4.60	5.10	0.32	0.89	1.01	1.49	4.17	4.72	93
	1.5+1.5+2.5	1.25	1.25	2.09	1.30	4.60	5.10	0.32	0.89	0.99	1.49	4.17	4.63	93
	1.5+1.5+3.5	1.06	1.06	2.48	1.30	4.60	5.10	0.32	0.88	0.97	1.49	4.12	4.53	93
	1.5+2.0+2.0	1.25	1.67	1.67	1.30	4.60	5.10	0.32	0.88	0.95	1.49	4.12	4.44	93
	1.5+2.0+2.5	1.15	1.53	1.92	1.30	4.60	5.10	0.32	0.87	0.93	1.49	4.07	4.35	93
	1.5+2.0+3.5	0.99	1.31	2.30	1.30	4.60	5.10	0.32	0.87	0.91	1.49	4.07	4.25	93
	1.5+2.5+2.5	1.06	1.77	1.77	1.30	4.60	5.10	0.32	0.88	0.87	1.49	4.12	4.07	93
	2.0+2.0+2.0	1.53	1.53	1.53	1.30	4.60	5.10	0.32	0.87	0.89	1.49	4.07	4.16	93
	2.0+2.0+2.5	1.42	1.42	1.77	1.30	4.60	5.10	0.32	0.87	0.86	1.49	4.07	4.02	93
	2.0+2.5+2.5	1.31	1.64	1.64	1.30	4.60	5.10	0.32	0.86	0.84	1.49	4.03	3.93	93

Notes

- The total capacity of each connected indoor unit is up to ·7.0·kW.
- The values above are for connecting with the following indoor unit types:
·1.5, 2.0, 2.5, 3.5· kW class
Wall-mounted ·FTXM-M, FTXM-N, FTXM-R, CTXM-M, CTXM-N, CTXM-R· series
- Heating capacity conditions
Indoor temperature ·20·°C DB
Outdoor temperature ·7·°C DB / ·6·°C WB
- Cooling capacity conditions
Indoor temperature ·27·°C DB / ·19·°C WB
Outdoor temperature ·35·°C DB
- For additional information on the connection of the DHW generator for Multi and the Hybrid for Multi, see ·3D106169·.

3D105370C

4 Combination table

4 - 1 Combination Table

3MXM52N9

Cooling (50Hz 230V)

Outdoor unit	Indoor unit	Cooling capacity [kW]			Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room · A ·	Room · B ·	Room · C ·	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	
3MXM52N2V1B 3MXM52N2V1B9	1,50	1,50	---	---	1,40	1,50	2,40	0,34	0,36	0,63	1,50	1,62	2,86	96,00
	2,00	2,00	---	---	1,60	2,00	3,00	0,36	0,48	0,78	1,60	2,17	3,51	96,00
	2,50	2,50	---	---	1,60	2,50	3,20	0,36	0,64	0,87	1,62	2,89	3,92	96,00
	3,50	3,50	---	---	1,60	3,50	4,20	0,37	0,98	1,30	1,63	4,43	5,88	96,00
	4,20	4,20	---	---	1,60	4,20	4,60	0,37	1,21	1,49	1,63	5,47	6,70	96,00
	5,00	---	5,00	---	1,60	5,00	5,40	0,35	1,76	2,03	1,55	7,94	9,18	96,00
	1.5+1.5	1,50	1,50	---	1,70	3,00	4,70	0,35	0,55	1,32	1,55	2,50	5,98	96,00
	1.5+2.0	1,50	2,00	---	1,70	3,50	4,70	0,35	0,66	1,30	1,55	2,99	5,88	96,00
	1.5+2.5	1,50	2,50	---	1,70	4,00	5,00	0,35	0,78	1,92	1,55	3,54	8,66	96,00
	1.5+3.5	1,50	3,50	---	1,70	5,00	6,00	0,35	1,06	2,17	1,55	4,81	9,80	96,00
	1.5+4.2	1,37	3,83	---	1,70	5,20	6,10	0,35	1,10	2,26	1,55	4,99	10,21	96,00
	1.5+5.0	1,20	4,00	---	1,70	5,20	6,30	0,35	1,10	2,28	1,55	4,99	10,31	96,00
	2.0+2.0	2,00	2,00	---	1,70	4,00	6,00	0,35	0,85	2,25	1,55	3,85	10,16	96,00
	2.0+2.5	2,00	2,50	---	1,70	4,50	6,20	0,35	0,95	2,21	1,55	4,31	9,99	96,00
	2.0+3.5	1,89	3,31	---	1,70	5,20	6,30	0,35	1,10	2,30	1,55	4,99	10,38	96,00
	2.0+4.2	1,68	3,52	---	1,70	5,20	6,30	0,35	1,09	2,25	1,55	4,94	10,18	96,00
	2.0+5.0	1,49	3,71	---	1,70	5,20	6,50	0,35	1,09	2,19	1,55	4,94	9,89	96,00
	2.5+2.5	2,50	2,50	---	1,70	5,00	6,30	0,35	1,04	2,34	1,55	4,72	10,59	96,00
	2.5+3.5	2,17	3,03	---	1,70	5,20	6,30	0,35	1,09	2,28	1,55	4,94	10,31	96,00
	2.5+4.2	1,94	3,26	---	1,70	5,20	6,40	0,35	1,09	2,30	1,55	4,94	10,41	96,00
	2.5+5.0	1,73	3,47	---	1,70	5,20	6,50	0,35	1,06	2,14	1,55	4,81	9,68	96,00
	3.5+3.5	2,60	2,60	---	1,70	5,20	6,40	0,35	1,08	2,28	1,55	4,90	10,31	96,00
	3.5+4.2	2,36	2,84	---	1,70	5,20	6,40	0,35	1,08	2,26	1,55	4,90	10,21	96,00
	3.5+5.0	2,14	3,06	---	1,70	5,20	6,60	0,35	1,06	2,19	1,55	4,81	9,89	96,00
	4.2+4.2	2,60	2,60	---	1,70	5,20	6,50	0,35	1,07	2,24	1,55	4,85	10,11	96,00
	1.5+1.5+1.5	1,50	1,50	1,50	1,80	4,50	6,70	0,37	0,90	2,28	1,65	4,08	10,30	96,00
	1.5+1.5+2.0	1,50	1,50	2,00	1,80	5,00	6,70	0,37	1,06	2,26	1,65	4,81	10,20	96,00
	1.5+1.5+2.5	1,42	1,42	2,36	1,80	5,20	6,70	0,37	1,09	2,23	1,65	4,94	10,10	96,00
	1.5+1.5+3.5	1,20	1,20	2,80	1,90	5,20	6,80	0,37	1,09	2,28	1,65	4,94	10,30	96,00
	1.5+1.5+4.2	1,08	1,08	3,03	1,90	5,20	6,80	0,37	1,08	2,26	1,65	4,90	10,20	96,00
	1.5+1.5+5.0	0,98	0,98	3,25	2,00	5,20	7,10	0,35	1,05	2,17	1,55	4,76	9,80	96,00
	1.5+2.0+2.0	1,42	1,89	1,89	1,80	5,20	6,70	0,37	1,10	2,21	1,65	4,99	10,00	96,00
	1.5+2.0+2.5	1,30	1,73	2,17	1,80	5,20	6,70	0,37	1,09	2,19	1,65	4,94	9,90	96,00
	1.5+2.0+3.5	1,11	1,49	2,60	1,90	5,20	6,80	0,37	1,08	2,23	1,65	4,90	10,10	96,00
	1.5+2.0+4.2	1,01	1,35	2,84	1,90	5,20	6,80	0,37	1,08	2,19	1,65	4,90	9,90	96,00
	1.5+2.0+5.0	0,92	1,22	3,06	2,00	5,20	7,20	0,35	1,04	2,15	1,55	4,72	9,70	96,00
	1.5+2.5+2.5	1,20	2,00	2,00	1,80	5,20	6,70	0,37	1,09	2,17	1,65	4,94	9,80	96,00
	1.5+2.5+3.5	1,04	1,73	2,43	1,90	5,20	6,80	0,37	1,08	2,21	1,65	4,90	10,00	96,00
	1.5+2.5+4.2	0,95	1,59	2,66	1,90	5,20	6,80	0,37	1,07	2,19	1,65	4,85	9,90	96,00
	1.5+2.5+5.0	0,87	1,44	2,89	2,00	5,20	7,30	0,35	1,04	2,17	1,55	4,72	9,80	96,00
	1.5+3.5+3.5	0,92	2,14	2,14	1,80	5,20	7,30	0,37	1,07	2,15	1,65	4,85	9,70	96,00
	2.0+2.0+2.0	1,73	1,73	1,73	1,80	5,20	7,00	0,37	1,07	2,22	1,65	4,85	10,05	96,00
	2.0+2.0+2.5	1,60	1,60	2,00	1,80	5,20	7,00	0,37	1,06	2,21	1,65	4,81	10,00	96,00
	2.0+2.0+3.5	1,39	1,39	2,43	1,90	5,20	7,20	0,39	1,05	2,17	1,75	4,76	9,80	96,00
	2.0+2.0+4.2	1,27	1,27	2,66	1,90	5,20	7,20	0,39	1,04	2,15	1,75	4,72	9,70	96,00
	2.0+2.0+5.0	1,16	1,16	2,89	2,00	5,20	7,30	0,37	1,03	2,19	1,65	4,67	9,91	96,00
	2.0+2.5+2.5	1,49	1,86	1,86	1,80	5,20	7,10	0,39	1,05	2,12	1,75	4,76	9,60	96,00
	2.0+2.5+3.5	1,30	1,63	2,28	1,90	5,20	7,20	0,39	1,04	2,15	1,75	4,72	9,70	96,00
	2.0+2.5+4.2	1,20	1,49	2,51	1,90	5,20	7,20	0,39	1,04	2,14	1,75	4,72	9,65	96,00
	2.0+3.5+3.5	1,16	2,02	2,02	1,90	5,20	7,30	0,39	1,04	2,15	1,75	4,72	9,70	96,00
	2.5+2.5+2.5	1,73	1,73	1,73	1,90	5,20	7,10	0,39	1,04	2,19	1,75	4,72	9,90	96,00
	2.5+2.5+3.5	1,53	1,53	2,14	1,90	5,20	7,20	0,39	1,04	2,16	1,75	4,72	9,75	96,00

Notes

- The total capacity of each connected indoor unit is up to ·9.0·kW.
- The values above are for connecting with the following indoor unit types:
·1.5,2.0,2.5,3.5,4.2,5.0· kW class
Wall-mounted ·CTXM-M, CTXM-N, CTXM-R, FTXM-M, FTXM-N, FTXM-R· series
- Cooling capacity conditions
Indoor temperature ·27·°C DB / ·19·°C WB
Outdoor temperature ·35·°C DB
- For additional information on the connection of the DHW generator for Multi and the Hybrid for Multi, see ·3D106169·.

3D105371A

4 Combination table

4 - 1 Combination Table

3MXM52N9

Heating (50Hz 230V)

Outdoor unit	Indoor unit	Heating capacity [kW]			Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room -A-	Room -B-	Room -C-	Minimum	Nominal	Maximum	Minimum	Nomina	Maximu	Minimu	Nomina	Maximu	
3MXM52M2V1B 3MXM52N2V1B 3MXM52N2V1B9	1.5	2.30	---	---	1.10	2.30	3.40	0.30	0.57	1.09	1.34	2.55	4.94	96
	2.0	2.70	---	---	1.10	2.70	3.80	0.30	0.76	1.27	1.34	3.40	5.75	96
	2.5	3.40	---	---	1.10	3.40	4.20	0.30	1.01	1.36	1.34	4.54	6.16	96
	3.5	4.20	---	---	1.10	4.20	4.80	0.30	1.42	1.74	1.34	6.39	7.88	96
	4.2	4.80	---	---	1.10	4.80	5.60	0.30	1.62	2.03	1.34	7.32	9.18	96
	5.0	---	5.80	---	1.10	5.80	6.80	0.30	2.17	2.58	1.34	9.80	11.68	96
	1.5+1.5	1.80	1.80	---	1.20	3.60	5.80	0.32	0.67	1.62	1.44	3.04	7.34	96
	1.5+2.0	1.71	2.29	---	1.20	4.00	5.80	0.32	0.77	1.60	1.44	3.49	7.25	96
	1.5+2.5	1.69	2.81	---	1.20	4.50	6.90	0.32	0.91	2.06	1.44	4.13	9.33	96
	1.5+3.5	1.65	3.85	---	1.20	5.50	7.00	0.32	1.22	2.25	1.44	5.53	10.19	96
	1.5+4.2	1.58	4.42	---	1.20	6.00	7.00	0.32	1.42	2.23	1.44	6.44	10.10	96
	1.5+5.0	1.57	5.23	---	1.30	6.80	7.20	0.32	1.58	2.30	1.44	7.16	10.42	96
	2.0+2.0	3.40	3.40	---	1.20	6.80	7.00	0.32	1.59	2.26	1.44	7.21	10.24	96
	2.0+2.5	3.02	3.78	---	1.20	6.80	7.00	0.32	1.58	2.25	1.44	7.16	10.19	96
	2.0+3.5	2.47	4.33	---	1.20	6.80	7.10	0.32	1.57	2.26	1.44	7.12	10.24	96
	2.0+4.2	2.19	4.61	---	1.20	6.80	7.10	0.32	1.56	2.24	1.44	7.07	10.14	96
	2.0+5.0	1.94	4.86	---	1.40	6.80	7.20	0.32	1.53	2.28	1.44	6.93	10.32	96
	2.5+2.5	3.40	3.40	---	1.20	6.80	7.00	0.32	1.53	2.23	1.44	6.93	10.10	96
	2.5+3.5	2.83	3.97	---	1.30	6.80	7.20	0.32	1.53	2.35	1.44	6.93	10.64	96
	2.5+4.2	2.54	4.26	---	1.30	6.80	7.20	0.32	1.52	2.33	1.44	6.89	10.55	96
	2.5+5.0	2.27	4.53	---	1.40	6.80	7.40	0.32	1.50	2.33	1.44	6.80	10.52	96
	3.5+3.5	3.40	3.40	---	1.40	6.80	7.30	0.32	1.52	2.38	1.44	6.89	10.78	96
	3.5+4.2	3.09	3.71	---	1.40	6.80	7.30	0.32	1.51	2.36	1.44	6.84	10.69	96
	3.5+5.0	2.80	4.00	---	1.45	6.80	7.50	0.32	1.50	2.30	1.44	6.80	10.42	96
	4.2+4.2	3.40	3.40	---	1.40	6.80	7.30	0.32	1.50	2.35	1.44	6.80	10.62	96
	1.5+1.5+1.5	2.27	2.27	2.27	1.30	6.80	8.00	0.32	1.40	2.12	1.44	6.35	9.60	96
	1.5+1.5+2.0	2.04	2.04	2.72	1.30	6.80	8.00	0.32	1.40	2.10	1.44	6.35	9.51	96
	1.5+1.5+2.5	1.85	1.85	3.09	1.30	6.80	8.00	0.32	1.39	2.08	1.44	6.30	9.42	96
	1.5+1.5+3.5	1.57	1.57	3.66	1.40	6.80	8.10	0.32	1.38	2.13	1.44	6.25	9.65	96
	1.5+1.5+4.2	1.42	1.42	3.97	1.40	6.80	8.10	0.32	1.38	2.11	1.44	6.25	9.56	96
	1.5+1.5+5.0	1.28	1.28	4.25	1.60	6.80	8.30	0.32	1.32	2.09	1.44	5.98	9.47	96
	1.5+2.0+2.0	1.85	2.47	2.47	1.30	6.80	8.00	0.32	1.39	2.14	1.44	6.30	9.69	96
	1.5+2.0+2.5	1.70	2.27	2.83	1.30	6.80	8.00	0.32	1.38	2.12	1.44	6.25	9.60	96
	1.5+2.0+3.5	1.46	1.94	3.40	1.40	6.80	8.10	0.32	1.37	2.16	1.44	6.21	9.78	96
	1.5+2.0+4.2	1.32	1.77	3.71	1.40	6.80	8.10	0.32	1.36	2.14	1.44	6.16	9.69	96
	1.5+2.0+5.0	1.20	1.60	4.00	1.60	6.80	8.30	0.32	1.31	2.07	1.44	5.94	9.38	96
	1.5+2.5+2.5	1.57	2.62	2.62	1.30	6.80	8.00	0.32	1.38	2.12	1.44	6.25	9.60	96
	1.5+2.5+3.5	1.36	2.27	3.17	1.40	6.80	8.10	0.32	1.37	2.13	1.44	6.21	9.65	96
	1.5+2.5+4.2	1.24	2.07	3.48	1.40	6.80	8.10	0.32	1.36	2.11	1.44	6.16	9.56	96
	1.5+2.5+5.0	1.13	1.89	3.78	1.60	6.80	8.30	0.32	1.30	2.09	1.44	5.89	9.47	96
	1.5+3.5+3.5	1.20	2.80	2.80	1.30	6.80	8.20	0.32	1.36	2.14	1.44	6.16	9.69	96
	2.0+2.0+2.0	2.27	2.27	2.27	1.30	6.80	8.00	0.32	1.39	2.13	1.44	6.30	9.65	96
	2.0+2.0+2.5	2.09	2.09	2.62	1.30	6.80	8.00	0.32	1.38	2.11	1.44	6.25	9.56	96
	2.0+2.0+3.5	1.81	1.81	3.17	1.40	6.80	8.10	0.32	1.37	2.12	1.44	6.21	9.60	96
	2.0+2.0+4.2	1.66	1.66	3.48	1.40	6.80	8.10	0.32	1.36	2.10	1.44	6.16	9.51	96
	2.0+2.0+5.0	1.51	1.51	3.78	1.60	6.80	8.30	0.32	1.29	2.08	1.44	5.85	9.42	96
	2.0+2.5+2.5	1.94	2.43	2.43	1.30	6.80	8.00	0.32	1.37	2.09	1.44	6.21	9.47	96
	2.0+2.5+3.5	1.70	2.13	2.98	1.50	6.80	8.10	0.32	1.36	2.11	1.44	6.16	9.56	96
	2.0+2.5+4.2	1.56	1.95	3.28	1.50	6.80	8.10	0.32	1.35	2.11	1.44	6.12	9.56	96
	2.0+3.5+3.5	1.51	2.64	2.64	1.50	6.80	8.20	0.32	1.35	2.15	1.44	6.12	9.74	96
	2.5+2.5+2.5	2.27	2.27	2.27	1.40	6.80	8.00	0.32	1.36	2.07	1.44	6.16	9.38	96
	2.5+2.5+3.5	2.00	2.00	2.80	1.50	6.80	8.10	0.32	1.35	2.09	1.44	6.12	9.47	96

Notes

- The total capacity of each connected indoor unit is up to 9.0 kW.
- The values above are for connecting with the following indoor unit types:
-1.5, 2.0, 2.5, 3.5, 4.2, 5.0 kW class
Wall-mounted -CTXM-M, CTXM-N, CTXM-R, FTXM-M, FTXM-N, FTXM-R series
- Heating capacity conditions
Indoor temperature -20°C DB
Outdoor temperature -7°C DB / -6°C WB
- Cooling capacity conditions
Indoor temperature -27°C DB / -19°C WB
Outdoor temperature -35°C DB
- For additional information on the connection of the DHW generator for Multi and the Hybrid for Multi, see 3D106169.

3D105372D

4 Combination table

4 - 1 Combination Table

3MXM68N9

Cooling ·(50Hz 230V)·

Outdoor unit	Indoor unit	Cooling capacity [kW]			Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room ·A·	Room ·B·	Room ·C·	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	
3MXM68N2V1B 3MXM68N2V1B9	1,5	1,60	---	---	1,52	1,60	2,49	0,40	0,42	0,59	1,82	1,98	2,71	95
	2,0	2,00	---	---	1,66	2,00	2,68	0,42	0,43	0,60	1,91	2,08	2,75	95
	2,5	2,50	---	---	1,74	2,50	3,44	0,44	0,55	0,82	2,00	2,62	3,77	95
	3,5	3,50	---	---	1,93	3,50	4,86	0,46	0,80	1,43	2,09	3,84	6,53	95
	4,2	---	---	4,20	1,93	4,20	5,33	0,46	0,82	1,44	2,09	3,93	6,57	95
	5,0	---	---	5,00	1,94	5,00	6,03	0,44	1,50	2,13	2,00	7,20	9,77	95
	6,0	---	---	6,00	1,94	6,00	6,51	0,44	1,52	2,13	2,00	7,29	9,77	95
	1.5+1.5	1,50	1,50	---	1,95	3,00	4,79	0,40	0,60	1,15	1,81	2,75	5,25	95
	1.5+2.0	1,50	2,00	---	1,95	3,50	4,96	0,40	0,74	1,22	1,81	3,38	5,58	95
	1.5+2.5	1,50	2,50	---	1,95	4,00	5,28	0,40	0,89	1,36	1,81	4,08	6,23	95
	1.5+3.5	1,50	3,50	---	1,95	5,00	6,17	0,39	1,24	1,83	1,77	5,68	8,39	95
	1.5+4.2	1,50	4,20	---	1,95	5,70	6,39	0,39	1,51	1,96	1,77	6,90	8,96	95
	1.5+5.0	1,50	5,00	---	1,95	6,50	7,08	0,38	1,78	2,23	1,73	8,14	10,22	95
	1.5+6.0	1,36	5,44	---	1,96	6,80	7,59	0,37	1,93	2,36	1,68	8,82	10,79	95
	2.0+2.0	2,00	2,00	---	1,95	4,00	5,12	0,40	0,89	1,29	1,81	4,08	5,91	95
	2.0+2.5	2,00	2,50	---	1,95	4,50	5,44	0,40	1,06	1,43	1,81	4,86	6,56	95
	2.0+3.5	2,00	3,50	---	1,95	5,50	6,30	0,39	1,39	1,91	1,77	6,38	8,76	95
	2.0+4.2	2,00	4,20	---	1,95	6,20	6,51	0,39	1,70	2,05	1,77	7,77	9,37	95
	2.0+5.0	1,94	4,86	---	1,95	6,80	7,26	0,38	1,90	2,36	1,73	8,68	10,79	95
	2.0+6.0	1,70	5,10	---	1,96	6,80	7,71	0,37	1,92	2,45	1,68	8,78	11,20	95
	2.5+2.5	2,50	2,50	---	1,95	5,00	6,10	0,41	1,20	1,78	1,89	5,51	8,15	95
	2.5+3.5	2,50	3,50	---	1,95	6,00	6,57	0,40	1,54	2,11	1,81	7,03	9,65	95
	2.5+4.2	2,50	4,20	---	1,95	6,70	6,95	0,40	1,79	2,38	1,81	8,21	10,88	95
	2.5+5.0	2,27	4,53	---	1,95	6,80	7,37	0,37	1,78	2,45	1,68	8,15	11,20	95
	2.5+6.0	2,00	4,80	---	1,96	6,80	7,71	0,35	1,76	2,45	1,60	8,06	11,20	95
	3.5+3.5	3,40	3,40	---	1,95	6,80	7,13	0,38	1,73	2,37	1,73	7,90	10,83	95
	3.5+4.2	3,09	3,71	---	1,95	6,80	7,24	0,38	1,72	2,46	1,73	7,87	11,24	95
	3.5+5.0	2,80	4,00	---	1,95	6,80	7,76	0,35	1,68	2,78	1,60	7,71	12,71	95
	3.5+6.0	2,51	4,29	---	2,26	6,80	8,07	0,40	1,67	2,72	1,81	7,63	12,46	95
	4.2+4.2	---	3,40	3,40	1,95	6,80	7,14	0,38	1,71	2,37	1,73	7,84	10,83	95
	4.2+5.0	---	3,10	3,70	1,95	6,80	7,77	0,35	1,68	2,78	1,60	7,68	12,71	95
	4.2+6.0	---	2,80	4,00	2,26	6,80	8,08	0,40	1,66	2,72	1,81	7,60	12,46	95
	5.0+5.0	---	3,40	3,40	2,34	6,80	8,22	0,43	1,64	2,98	1,98	7,52	13,65	95
	5.0+6.0	---	3,09	3,71	2,47	6,80	8,45	0,44	1,63	2,92	2,02	7,44	13,36	95
	1.5+1.5+1.5	1,50	1,50	1,50	1,96	4,50	6,40	0,39	0,61	1,57	1,77	2,80	7,17	95
	1.5+1.5+2.0	1,44	1,44	1,92	1,96	4,80	6,56	0,39	0,70	1,65	1,77	3,21	7,54	95
	1.5+1.5+2.5	1,36	1,36	2,27	1,96	5,00	6,72	0,39	0,80	1,73	1,77	3,67	7,90	95
	1.5+1.5+3.5	1,50	1,50	3,50	1,96	6,50	7,11	0,38	1,56	1,92	1,73	7,14	8,80	95
	1.5+1.5+4.2	1,42	1,42	3,97	1,96	6,80	7,33	0,38	1,80	2,05	1,73	8,24	9,37	95
	1.5+1.5+5.0	1,28	1,28	4,25	1,96	6,80	7,74	0,36	1,75	2,22	1,64	8,01	10,14	95
	1.5+1.5+6.0	1,13	1,13	4,53	2,31	6,80	7,99	0,40	1,73	2,17	1,85	7,92	9,94	95
	1.5+2.0+2.0	1,50	2,00	2,00	1,96	5,50	6,48	0,39	1,01	1,61	1,77	4,63	7,37	95

Notes

1. The total capacity of each connected indoor unit is up to ·11.0·kW.
2. The values above are for connecting with the following indoor unit types:
·1.5, 2.0, 2.5, 3.5, 4.2, 5.0, 6.0· kW class
Wall-mounted ·CTXM-M, CTXM-N, CTXM-R, FTXM-M, FTXM-N, FTXM-R· series
3. Cooling capacity conditions
Indoor temperature ·27·°C DB / ·19·°C WB
Outdoor temperature ·35·°C DB
4. For additional information on the connection of the DHW generator for Multi and the Hybrid for Multi, see ·3D106169·.

3D105381A

4 Combination table

4 - 1 Combination Table

3MXM68N9

Cooling (50Hz 230V)

Outdoor unit	Indoor unit	Cooling capacity [kW]			Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room -A-	Room -B-	Room -C-	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	
3MXM68N2V1B 3MXM68N2V1B9	1.5+2.0+2.5	1,50	2,00	2,50	1,96	6,00	6,87	0,39	1,32	1,81	1,77	6,05	8,27	95
	1.5+2.0+3.5	1,46	1,94	3,40	1,96	6,80	7,25	0,38	1,80	2,01	1,73	8,24	9,21	95
	1.5+2.0+4.2	1,32	1,77	3,71	1,96	6,80	7,47	0,38	1,79	2,14	1,73	8,20	9,78	95
	1.5+2.0+5.0	1,20	1,60	4,00	1,96	6,80	7,87	0,36	1,74	2,31	1,64	7,97	10,55	95
	1.5+2.0+6.0	1,07	1,43	4,29	2,31	6,80	8,13	0,40	1,72	2,26	1,85	7,88	10,35	95
	1.5+2.5+2.5	1,50	2,50	2,50	1,96	6,50	7,10	0,38	1,63	1,92	1,73	7,46	8,80	95
	1.5+2.5+3.5	1,36	2,27	3,17	1,96	6,80	7,60	0,36	1,79	2,23	1,64	8,20	10,18	95
	1.5+2.5+4.2	1,24	2,07	3,48	1,96	6,80	7,81	0,36	1,78	2,35	1,64	8,15	10,75	95
	1.5+2.5+5.0	1,13	1,89	3,78	1,96	6,80	7,95	0,36	1,74	2,35	1,64	7,97	10,75	95
	1.5+2.5+6.0	1,02	1,70	4,08	2,31	6,80	8,42	0,41	1,71	2,44	1,89	7,83	11,16	95
	1.5+3.5+3.5	1,20	2,80	2,80	1,96	6,80	7,94	0,37	1,77	2,45	1,68	8,11	11,20	95
	1.5+3.5+4.2	1,11	2,59	3,10	1,96	6,80	8,13	0,37	1,76	2,58	1,68	8,06	11,81	95
	1.5+3.5+5.0	1,02	2,38	3,40	1,96	6,80	8,46	0,33	1,72	2,72	1,52	7,88	12,46	95
	1.5+3.5+6.0	0,93	2,16	3,71	2,31	6,80	8,56	0,41	1,70	2,53	1,89	7,79	11,57	95
	1.5+4.2+4.2	1,03	2,88	2,88	1,96	6,80	8,26	0,37	1,75	2,68	1,68	8,01	12,26	95
	1.5+4.2+5.0	0,95	2,67	3,18	1,96	6,80	8,53	0,33	1,71	2,77	1,52	7,83	12,67	95
	2.0+2.0+2.0	2,00	2,00	2,00	1,96	6,00	6,64	0,39	1,34	1,68	1,77	6,14	7,70	95
	2.0+2.0+2.5	2,00	2,00	2,50	1,96	6,50	7,03	0,39	1,63	1,89	1,77	7,46	8,64	95
	2.0+2.0+3.5	1,81	1,81	3,17	1,96	6,80	7,40	0,38	1,79	2,09	1,73	8,20	9,57	95
	2.0+2.0+4.2	1,66	1,66	3,48	1,96	6,80	7,61	0,38	1,78	2,23	1,73	8,15	10,18	95
	2.0+2.0+5.0	1,51	1,51	3,78	1,96	6,80	8,01	0,36	1,74	2,39	1,64	7,97	10,96	95
	2.0+2.0+6.0	1,36	1,36	4,08	2,31	6,80	8,27	0,40	1,71	2,35	1,85	7,83	10,75	95
	2.0+2.5+2.5	1,94	2,43	2,43	1,96	6,80	7,24	0,38	1,77	2,01	1,73	8,11	9,21	95
	2.0+2.5+3.5	1,70	2,13	2,98	1,96	6,80	7,74	0,36	1,76	2,31	1,64	8,06	10,55	95
	2.0+2.5+4.2	1,56	1,95	3,28	1,96	6,80	7,94	0,36	1,75	2,45	1,64	8,01	11,20	95
	2.0+2.5+5.0	1,43	1,79	3,58	1,96	6,80	8,08	0,36	1,71	2,44	1,64	7,83	11,16	95
	2.0+2.5+6.0	1,30	1,62	3,89	2,31	6,80	8,55	0,41	1,69	2,53	1,89	7,74	11,57	95
	2.0+3.5+3.5	1,51	2,64	2,64	1,96	6,80	8,07	0,37	1,74	2,54	1,68	7,97	11,61	95
	2.0+3.5+4.2	1,40	2,45	2,94	1,96	6,80	8,25	0,37	1,74	2,68	1,68	7,97	12,26	95
	2.0+3.5+5.0	1,30	2,27	3,24	2,28	6,80	8,58	0,40	1,69	2,82	1,85	7,74	12,91	95
	2.0+4.2+4.2	1,31	2,75	2,75	1,96	6,80	8,37	0,37	1,73	2,77	1,68	7,92	12,67	95
	2.5+2.5+2.5	2,27	2,27	2,27	1,96	6,80	7,53	0,38	1,76	2,18	1,73	8,06	9,98	95
	2.5+2.5+3.5	2,00	2,00	2,80	1,96	6,80	7,94	0,36	1,72	2,45	1,64	7,88	11,20	95
	2.5+2.5+4.2	1,85	1,85	3,10	1,96	6,80	8,12	0,36	1,71	2,58	1,64	7,83	11,81	95
	2.5+2.5+5.0	1,70	1,70	3,40	2,28	6,80	8,45	0,40	1,67	2,72	1,85	7,65	12,46	95
	2.5+2.5+6.0	1,55	1,55	3,71	2,42	6,80	8,74	0,40	1,65	2,67	1,85	7,56	12,22	95
	2.5+3.5+3.5	1,79	2,51	2,51	2,27	6,80	8,30	0,40	1,70	2,72	1,85	7,79	12,46	95
	2.5+3.5+4.2	1,67	2,33	2,80	2,27	6,80	8,43	0,40	1,69	2,82	1,85	7,74	12,91	95
	2.5+3.5+5.0	1,55	2,16	3,09	2,48	6,80	8,74	0,42	1,65	2,96	1,94	7,56	13,56	95
	2.5+4.2+4.2	1,56	2,62	2,62	2,27	6,80	8,49	0,40	1,68	2,87	1,85	7,69	13,12	95
	3.5+3.5+3.5	2,27	2,27	2,27	2,38	6,80	8,59	0,40	1,68	2,96	1,81	7,69	13,56	95

Notes

- 1.The total capacity of each connected indoor unit is up to ·11.0·kW.
- 2.The values above are for connecting with the following indoor unit types:
·1.5, 2.0, 2.5, 3.5, 4.2, 5.0, 6.0· kW class
Wall-mounted ·CTXM-M, CTXM-N, CTXM-R, FTXM-M, FTXM-N, FTXM-R· series
3. Cooling capacity conditions
Indoor temperature ·27·°C DB / ·19·°C WB
Outdoor temperature ·35·°C DB
4. For additional information on the connection of the
DHW generator for Multi and the Hybrid for Multi,
see ·3D106169·.

3D105382A

4 Combination table

4 - 1 Combination Table

3MXM68N9

Heating (50Hz 230V)-

Outdoor unit	Indoor unit	Heating capacity [kW]			Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room -A-	Room -B-	Room -C-	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	
3MXM68M2V1B 3MXM68N2V1B 3MXM68N2V1B9	1,5	2,70	---	---	1,47	2,70	4,08	0,42	0,72	1,22	1,91	3,35	5,59	95
	2,0	2,72	---	---	1,48	2,72	4,09	0,43	0,73	1,28	1,95	3,39	5,64	95
	2,5	3,40	---	---	1,44	3,40	4,30	0,42	1,02	1,37	1,91	4,72	6,08	95
	3,5	4,30	---	---	1,45	4,30	4,90	0,40	1,41	1,75	1,82	6,50	7,15	95
	4,2	---	4,32	---	1,44	4,32	5,70	0,40	1,40	2,04	1,82	6,46	7,15	95
	5,0	---	5,60	---	1,66	5,60	6,90	0,39	1,82	2,59	1,78	8,43	8,70	95
	6,0	---	7,90	---	1,88	7,90	8,91	0,37	2,62	2,64	1,69	12,13	12,08	95
	1.5+1.5	2,65	2,65	---	1,65	5,30	7,38	0,36	1,19	1,83	1,63	5,45	8,38	95
	1.5+2.0	2,44	3,26	---	1,65	5,70	7,76	0,36	1,31	1,99	1,63	6,00	9,09	95
	1.5+2.5	2,29	3,81	---	1,65	6,10	7,95	0,36	1,43	2,06	1,63	6,55	9,43	95
	1.5+3.5	2,07	4,83	---	1,80	6,90	8,50	0,37	1,69	2,35	1,68	7,74	10,74	95
	1.5+4.2	1,97	5,53	---	1,80	7,50	8,85	0,37	1,90	2,57	1,68	8,70	11,75	95
	1.5+5.0	1,89	6,31	---	2,18	8,20	10,38	0,45	2,13	2,91	2,06	9,75	13,31	95
	1.5+6.0	1,72	6,88	---	2,46	8,60	10,58	0,48	2,28	2,67	2,19	10,44	12,21	95
	2.0+2.0	3,25	3,25	---	1,65	6,50	7,95	0,36	1,37	2,31	1,63	6,28	9,47	95
	2.0+2.5	3,07	3,83	---	1,65	6,90	8,12	0,36	1,52	2,32	1,63	6,96	9,81	95
	2.0+3.5	2,73	4,77	---	1,80	7,50	8,67	0,37	1,75	2,43	1,68	8,01	11,12	95
	2.0+4.2	2,58	5,42	---	1,80	8,00	9,03	0,37	1,98	2,66	1,68	9,07	12,17	95
	2.0+5.0	2,46	6,14	---	2,18	8,60	10,56	0,45	2,26	3,00	2,06	10,35	13,73	95
	2.0+6.0	2,15	6,45	---	2,46	8,60	10,75	0,48	2,24	2,74	2,19	10,26	12,55	95
	2.5+2.5	3,60	3,60	---	1,65	7,20	8,49	0,36	1,62	2,36	1,63	7,42	10,78	95
	2.5+3.5	3,29	4,61	---	1,89	7,90	9,03	0,38	1,91	2,66	1,72	8,75	12,17	95
	2.5+4.2	3,10	5,20	---	1,89	8,30	9,29	0,38	2,11	2,82	1,72	9,66	12,93	95
	2.5+5.0	2,87	5,73	---	2,27	8,60	10,68	0,46	2,24	3,09	2,11	10,26	14,15	95
	2.5+6.0	2,53	6,07	---	2,55	8,60	10,88	0,50	2,22	2,77	2,28	10,17	12,67	95
	3.5+3.5	4,30	4,30	---	2,17	8,60	9,38	0,42	2,26	2,86	1,94	10,35	13,09	95
	3.5+4.2	3,91	4,69	---	2,17	8,60	9,47	0,42	2,26	2,91	1,94	10,35	13,31	95
	3.5+5.0	3,54	5,06	---	2,56	8,60	10,90	0,51	2,22	3,13	2,32	10,17	14,32	95
	3.5+6.0	3,17	5,43	---	2,74	8,60	11,01	0,52	2,21	2,76	2,37	10,12	12,63	95
	4.2+4.2	---	4,30	4,30	2,17	8,60	9,56	0,42	2,22	2,94	1,94	10,17	13,47	95
	4.2+5.0	---	3,93	4,67	2,56	8,60	10,91	0,51	2,21	3,19	2,32	10,12	14,61	95
	4.2+6.0	---	3,54	5,06	2,74	8,60	11,02	0,51	2,20	2,79	2,32	10,07	12,76	95
	5.0+5.0	---	4,30	4,30	2,94	8,60	11,10	0,59	2,17	3,11	2,71	9,94	14,23	95
	5.0+6.0	---	3,91	4,69	3,14	8,60	11,10	0,60	2,15	2,72	2,75	9,84	12,46	95
	1.5+1.5+1.5	2,17	2,17	2,17	2,01	6,50	9,92	0,41	1,33	2,26	1,89	6,09	10,36	95
	1.5+1.5+2.0	2,07	2,07	2,76	2,01	6,90	10,10	0,41	1,46	2,34	1,89	6,69	10,69	95
	1.5+1.5+2.5	2,02	2,02	3,36	2,10	7,40	10,18	0,42	1,64	2,37	1,94	7,51	10,86	95
	1.5+1.5+3.5	1,89	1,89	4,42	2,31	8,20	10,29	0,44	1,87	2,49	2,02	8,56	11,41	95
	1.5+1.5+4.2	1,79	1,79	5,02	2,31	8,60	10,29	0,44	2,03	2,49	2,02	9,30	11,41	95
	1.5+1.5+5.0	1,61	1,61	5,38	2,71	8,60	10,46	0,55	2,01	2,57	2,50	9,20	11,75	95
	1.5+1.5+6.0	1,43	1,43	5,73	2,93	8,60	10,59	0,55	1,99	2,31	2,50	9,11	10,57	95
	1.5+2.0+2.0	2,35	3,13	3,13	2,01	8,60	10,26	0,41	2,05	2,41	1,89	9,39	11,03	95

Notes

- 1.The total capacity of each connected indoor unit is up to ·11.0·kW.
- 2.The values above are for connecting with the following indoor unit types:
·1.5, 2.0, 2.5, 3.5, 4.2, 5.0, 6.0· kW class
Wall-mounted ·CTXM-M, CTXM-N, CTXM-R, FTXM-M, FTXM-N, FTXM-R· series
- 3.Heating capacity conditions
Indoor temperature ·20·°C DB
Outdoor temperature ·7·°C DB / ·6·°C WB
- 4.Cooling capacity conditions
Indoor temperature ·27·°C DB / ·19·°C WB
Outdoor temperature ·35·°C DB
- 5.For additional information on the connection of the DHW generator for Multi and the Hybrid for Multi, see ·3D106169·.

3D105383C

4 Combination table

4 - 1 Combination Table

3MXM68N9

Heating (50Hz 230V)

Outdoor unit	Indoor unit	Heating capacity [kW]			Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room -A-	Room -B-	Room -C-	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	
3MXM68M2V1B 3MXM68N2V1B 3MXM68N2V1B9	1.5+2.0+2.5	2,15	2,87	3,58	2,10	8,60	10,36	0,42	2,04	2,44	1,94	9,34	11,16	95
	1.5+2.0+3.5	1,84	2,46	4,30	2,31	8,60	10,45	0,44	2,02	2,58	2,02	9,25	11,79	95
	1.5+2.0+4.2	1,68	2,23	4,69	2,31	8,60	10,46	0,44	2,01	2,57	2,02	9,20	11,75	95
	1.5+2.0+5.0	1,52	2,02	5,06	2,71	8,60	10,88	0,55	2,00	2,64	2,50	9,16	12,08	95
	1.5+2.0+6.0	1,36	1,81	5,43	2,93	8,60	10,89	0,55	1,98	2,38	2,50	9,07	10,91	95
	1.5+2.5+2.5	1,98	3,31	3,31	2,20	8,60	10,47	0,45	2,03	2,44	2,06	9,30	11,16	95
	1.5+2.5+3.5	1,72	2,87	4,01	2,40	8,60	10,58	0,47	2,02	2,57	2,15	9,25	11,75	95
	1.5+2.5+4.2	1,57	2,62	4,40	2,41	8,60	10,58	0,47	2,00	2,57	2,15	9,16	11,75	95
	1.5+2.5+5.0	1,43	2,39	4,78	2,81	8,60	11,00	0,56	1,99	2,64	2,58	9,11	12,08	95
	1.5+2.5+6.0	1,29	2,15	5,16	3,02	8,60	11,00	0,57	1,97	2,38	2,62	9,02	10,91	95
	1.5+3.5+3.5	1,52	3,54	3,54	2,69	8,60	10,59	0,55	1,99	2,57	2,50	9,11	11,75	95
	1.5+3.5+4.2	1,40	3,27	3,93	2,69	8,60	10,59	0,55	1,98	2,56	2,50	9,07	11,71	95
	1.5+3.5+5.0	1,29	3,01	4,30	3,00	8,60	10,93	0,62	1,97	2,59	2,84	9,02	11,87	95
	1.5+3.5+6.0	1,17	2,74	4,69	2,93	8,60	10,93	0,55	1,96	2,37	2,50	8,98	10,86	95
	1.5+4.2+4.2	1,30	3,65	3,65	2,69	8,60	10,68	0,55	1,98	2,59	2,50	9,07	11,87	95
	1.5+4.2+5.0	1,21	3,38	4,02	3,00	8,60	10,99	0,62	1,96	2,67	2,84	8,98	12,21	95
	2.0+2.0+2.0	2,60	2,60	2,60	2,01	7,80	10,44	0,41	1,72	2,48	1,89	7,88	11,37	95
	2.0+2.0+2.5	2,52	2,52	3,15	2,10	8,20	10,52	0,42	1,83	2,52	1,94	8,38	11,54	95
	2.0+2.0+3.5	2,29	2,29	4,01	2,31	8,60	10,63	0,44	2,04	2,65	2,02	9,34	12,13	95
	2.0+2.0+4.2	2,10	2,10	4,40	2,31	8,60	10,63	0,44	2,02	2,65	2,02	9,25	12,13	95
	2.0+2.0+5.0	1,91	1,91	4,78	2,71	8,60	10,82	0,55	2,00	2,72	2,50	9,16	12,46	95
	2.0+2.0+6.0	1,72	1,72	5,16	2,93	8,60	10,95	0,55	1,99	2,46	2,50	9,11	11,24	95
	2.0+2.5+2.5	2,46	3,07	3,07	2,20	8,60	10,54	0,43	1,97	2,61	1,98	9,02	11,96	95
	2.0+2.5+3.5	2,15	2,69	3,76	2,40	8,60	10,63	0,46	2,02	2,65	2,11	9,25	12,13	95
	2.0+2.5+4.2	1,98	2,47	4,15	2,41	8,60	10,64	0,46	2,01	2,64	2,11	9,20	12,08	95
	2.0+2.5+5.0	1,81	2,26	4,53	2,81	8,60	11,06	0,56	1,98	2,75	2,58	9,07	12,59	95
	2.0+2.5+6.0	1,64	2,05	4,91	3,02	8,60	11,07	0,56	1,98	2,43	2,58	9,07	11,12	95
	2.0+3.5+3.5	1,91	3,34	3,34	2,69	8,60	10,76	0,52	2,00	2,70	2,37	9,16	12,34	95
	2.0+3.5+4.2	1,77	3,10	3,72	2,69	8,60	10,76	0,52	1,99	2,69	2,37	9,11	12,29	95
	2.0+3.5+5.0	1,64	2,87	4,10	3,00	8,60	11,11	0,58	1,98	2,82	2,67	9,07	12,88	95
	2.0+4.2+4.2	1,65	3,47	3,47	2,69	8,60	10,77	0,52	1,97	2,69	2,37	9,02	12,29	95
	2.5+2.5+2.5	2,87	2,87	2,87	2,31	8,60	10,65	0,45	1,99	2,64	2,06	9,11	12,08	95
	2.5+2.5+3.5	2,53	2,53	3,54	2,50	8,60	10,87	0,48	1,99	2,72	2,19	9,11	12,46	95
	2.5+2.5+4.2	2,34	2,34	3,93	2,50	8,60	10,88	0,48	1,97	2,72	2,19	9,02	12,46	95
	2.5+2.5+5.0	2,15	2,15	4,30	2,91	8,60	11,07	0,58	1,96	2,78	2,67	8,98	12,72	95
	2.5+2.5+6.0	1,95	1,95	4,69	3,12	8,60	11,08	0,58	1,94	2,43	2,67	8,88	11,12	95
	2.5+3.5+3.5	2,26	3,17	3,17	2,78	8,60	11,00	0,53	1,96	2,72	2,41	8,98	12,46	95
	2.5+3.5+4.2	2,11	2,95	3,54	2,79	8,60	11,01	0,53	1,96	2,71	2,41	8,98	12,42	95
	2.5+3.5+5.0	1,95	2,74	3,91	3,19	8,60	11,08	0,60	1,90	2,74	2,75	8,70	12,55	95
	2.5+4.2+4.2	1,97	3,31	3,31	2,79	8,60	11,01	0,53	1,95	2,71	2,41	8,93	12,42	95
	3.5+3.5+3.5	2,87	2,87	2,87	2,98	8,60	11,06	0,57	1,94	2,79	2,62	8,88	12,76	95

Notes

- 1.The total capacity of each connected indoor unit is up to ·11.0-kW.
- 2.The values above are for connecting with the following indoor unit types:
·1.5, 2.0, 2.5, 3.5, 4.2, 5.0, 6.0· kW class
Wall-mounted ·CTXM-M, CTXM-N, CTXM-R, FTXM-M, FTXM-N, FTXM-R· series
- 3.Heating capacity conditions
Indoor temperature ·20·°C DB
Outdoor temperature ·7·°C DB / ·6·°C WB
- 4.Cooling capacity conditions
Indoor temperature ·27·°C DB / ·19·°C WB
Outdoor temperature ·35·°C DB
- 5.For additional information on the connection of the DHW generator for Multi and the Hybrid for Multi, see ·3D106169·.

3D105384C

4 Combination table

4 - 1 Combination Table

3MXM-N9

In the combination table, the DHW generator for Multi or Hybrid for Multi is indicated by a capacity index.

For the DHW generator for Multi, the capacity index is "·2.0·". For the Hybrid for Multi, the applicable capacity index (·Note 7·) is indicated on the applicable 'Technical specifications' datasheet.

If the DHW generator for Multi or Hybrid for Multi is present in the system, then only combinations that contain their respective capacity index are allowed combinations. Disregard all other combinations.

Example – DHW generator for Multi

Example: allowed combinations – with DHW generator for Multi	
2.0 + 2.5 + 2.5	DHW generator for Multi + ·2.5· kW class indoor unit + ·2.5· kW class indoor unit
1.5+ 1.5 + 2.0	·1.5· kW class indoor unit + ·1.5· kW class indoor unit + DHW generator for Multi
2.0 + 2.0	·2.0· kW class indoor unit + DHW generator for Multi
...	...

Example – Hybrid for Multi

Example: allowed combinations – with Hybrid for Multi	
1.5+1.5+5.0	·1.5· kW class indoor unit + ·1.5· kW class indoor unit + ·5.0· kW class Hybrid for Multi
2.0+5.0	·2.0· kW class indoor unit + ·5.0· kW class Hybrid for Multi
1.5+1.5+7.1	·1.5· kW class indoor unit + ·1.5· kW class indoor unit + ·7.1· kW class Hybrid for Multi
...	...

To determine the cooling capacity of the system, only take into account the capacity class of the air conditioner indoor units. Ignore the capacity index of the Hybrid for Multi.

To determine the heating/cooling capacity of the system, only take into account the capacity class of the air conditioner indoor units. Ignore the capacity index of the DHW generator for Multi.

Combination of Hybrid for Multi and air conditioner indoor units

If the air conditioning indoor units are of the cooling-only type (and heating is provided by the Hybrid for Multi only), then the heating capacity equals the Hybrid for Multi capacity index.

If the Hybrid for Multi and the air conditioner indoor units both provide heating, then calculate the heating capacity by making the sum of the Hybrid for Multi capacity index and the capacity classes of the air conditioner indoor units.

Caution: Failure to include the capacity classes of the air conditioner indoor units in the calculation will result in capacity shortage, and may result in cold draft issues and/or a shortage of refrigerant in the system.

Example

·1.5· kW class indoor unit + ·1.5· kW class indoor unit + DHW generator for Multi = 1.5 + 1.5 + 2.0

Heating/cooling capacity (Note ·1·) = 1.5 + 1.5

Combination table

OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (Kw)			TOTAL CAPACITY (Kw)			POWER INPUT COOLING (Kw)			TOTAL CURRENT (A)			POWER FACTOR (%)
		A ROOM	B ROOM	C ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	
3MXM4N*	1.50	1.50	—	—	1.40	1.50	2.20	0.32	0.35	0.46	1.52	1.63	2.2	91
	2.00	2.00	—	—	1.40	2.00	2.90	0.32	0.64	0.71	1.52	2.28	3.4	91
	2.50	2.50	—	—	1.40	2.50	3.10	0.32	0.64	0.82	1.52	2.36	3.9	91
	3.50	3.50	—	—	1.40	3.50	4.10	0.32	0.98	1.19	1.52	4.68	5.7	91
	1.5+1.5	1.50	1.50	—	1.60	3.00	4.20	0.34	0.59	1.14	1.63	2.82	5.44	91
	1.5+2.0	1.50	2.00	—	1.60	3.50	4.20	0.34	0.71	1.12	1.63	3.40	5.33	91
	1.5+2.5	1.50	2.50	—	1.60	4.00	4.20	0.34	0.86	1.10	1.63	4.11	5.33	91
	1.5+3.5	1.20	2.80	—	1.60	4.00	4.20	0.34	0.85	1.08	1.63	4.07	5.33	91
	2.0+2.0	2.00	2.00	—	1.60	4.00	4.50	0.34	0.84	1.09	1.63	4.02	5.22	91
	2.0+2.5	1.78	2.22	—	1.60	4.00	4.50	0.34	0.83	1.07	1.63	3.97	5.22	91
	2.0+3.5	1.45	2.55	—	1.60	4.00	4.50	0.34	0.83	1.03	1.63	3.97	5.22	91
	2.5+2.5	2.00	2.00	—	1.60	4.00	4.50	0.34	0.83	1.05	1.63	3.97	5.22	91
	2.5+3.5	1.67	2.33	—	1.60	4.00	4.50	0.34	0.82	1.01	1.63	3.92	5.22	91
	3.5+3.5	2.00	2.00	—	1.60	4.00	4.50	0.34	0.82	0.99	1.63	3.92	5.11	91
	1.5+1.5+1.5	1.33	1.33	1.33	1.70	4.00	4.60	0.36	0.78	0.98	1.74	3.75	4.68	91
	1.5+1.5+2.0	1.20	1.20	1.60	1.70	4.00	4.60	0.36	0.77	0.96	1.74	3.68	4.68	91
	1.5+1.5+2.5	1.09	1.09	1.82	1.70	4.00	4.60	0.36	0.77	0.94	1.74	3.68	4.68	91
	1.5+1.5+3.5	0.92	0.92	2.15	1.70	4.00	4.60	0.36	0.76	0.90	1.74	3.64	4.68	91
	1.5+2.0+2.0	1.09	1.45	1.45	1.70	4.00	4.60	0.36	0.77	0.92	1.74	3.68	4.68	91
	1.5+2.0+2.5	1.00	1.33	1.67	1.70	4.00	4.60	0.36	0.76	0.91	1.74	3.64	4.68	91
	1.5+2.0+3.5	0.86	1.14	2.00	1.70	4.00	4.60	0.36	0.76	0.89	1.74	3.64	4.68	91
	1.5+2.5+2.5	0.92	1.54	1.54	1.70	4.00	4.60	0.36	0.76	0.87	1.74	3.64	4.68	91
	2.0+2.0+2.0	1.33	1.33	1.33	1.70	4.00	4.60	0.36	0.76	0.85	1.74	3.64	4.68	91
	2.0+2.0+2.5	1.23	1.23	1.54	1.70	4.00	4.60	0.36	0.76	0.83	1.74	3.64	4.68	91
2.0+2.5+2.5	1.14	1.43	1.43	1.70	4.00	4.60	0.36	0.75	0.81	1.74	3.59	4.68	91	

Notes

- The heating capacity data are ONLY valid for heating operation by the air conditioner indoor units when there is NO domestic hot water operation by the DHW generator for Multi.
- The DHW generator for Multi and Hybrid for Multi cannot be used as standalone units.
- The system can only contain either the DHW generator for Multi or the Hybrid for Multi.
- The system can only contain one DHW generator for Multi or Hybrid for Multi.
- The Hybrid for Multi can only be combined with ·3MXM52/68N2V1B, 4MXM68/80N2V1B, 5MXM90N2V1B· outdoor units.
- The purpose of Hybrid for Multi in combination with Multi Outdoor unit is for Heating only (space heating and DHW (by boiler only)). The target use of the air conditioner indoor unit in such a system is for cooling only.
A combination of Hybrid and Air conditioner indoor unit, both in heating operation, is NOT the main objective of such a system.
Hence, the heating comfort or continuous operation of the air conditioner indoor unit cannot be guaranteed over the complete operation range.
- In case of Hybrid for Multi, capacity index ·5· corresponds to the ·CHYHBH05*· indoor unit.
In case of Hybrid for Multi, capacity index ·7.1· corresponds to the ·CHYHBH08*· indoor unit.

Example

·1.5· kW class indoor unit + ·1.5· kW class indoor unit + DHW generator for Multi

In case of cooling-only air conditioner indoor units

Operating state	System	Capacity
Heating mode	·5.0· kW class Hybrid for Multi	
Cooling mode	·2.5· kW class indoor unit + ·3.5· kW class indoor unit	

Performance characteristics

①	②	Indoor air temperature [°C WB]											
		14°C		16°C		18°C		19°C		22°C		24°C	
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
1.5+1.5	22.0	3.50	0.50	4.51	0.83	4.78	0.86	4.92	0.88	5.33	0.92	5.61	0.95
	25.0	3.50	0.60	4.34	0.89	4.62	0.92	4.76	0.93	5.17	0.98	5.44	1.01
	32.0	3.50	0.90	3.95	1.03	4.23	1.06	4.37	1.08	4.78	1.12	5.05	1.15
	35.0	3.50	1.06	3.79	1.10	4.06	1.13	4.20	1.14	4.61	1.19	4.89	1.22
	40.0	3.24	1.18	3.51	1.21	3.79	1.24	3.92	1.26	4.33	1.31	4.61	1.34
	43.0	3.07	1.26	3.34	1.29	3.62	1.32	3.76	1.33	4.17	1.38	4.44	1.41
	46.0	2.87	1.30	3.10	1.30	3.34	1.30	3.45	1.30	3.79	1.30	4.00	1.30

3D106169D

5 Capacity tables


5 - 1 Capacity Table Legend

5

In order to fulfill more your requirements on quick access of data in the format you require, we have developed a tool to consult capacity tables.

Below you can find the link to the capacity table database and an overview of all the tools we have to help you select the correct product:

- **Capacity table database:** lets you find back and export quickly the capacity information you are looking for based upon unit model, refrigerant temperature and connection ratio.
- You can access the capacity table viewer here:
https://my.daikin.eu/content/denv/en_US/home/applications/software-finder/capacity-table-viewer.html




- An overview of **all software tools** that we offer can be found here:
https://my.daikin.eu/denv/en_US/home/applications/software-finder.html



6 Dimensional drawings


6 - 1 Dimensional Drawings

3MXM40-52N9

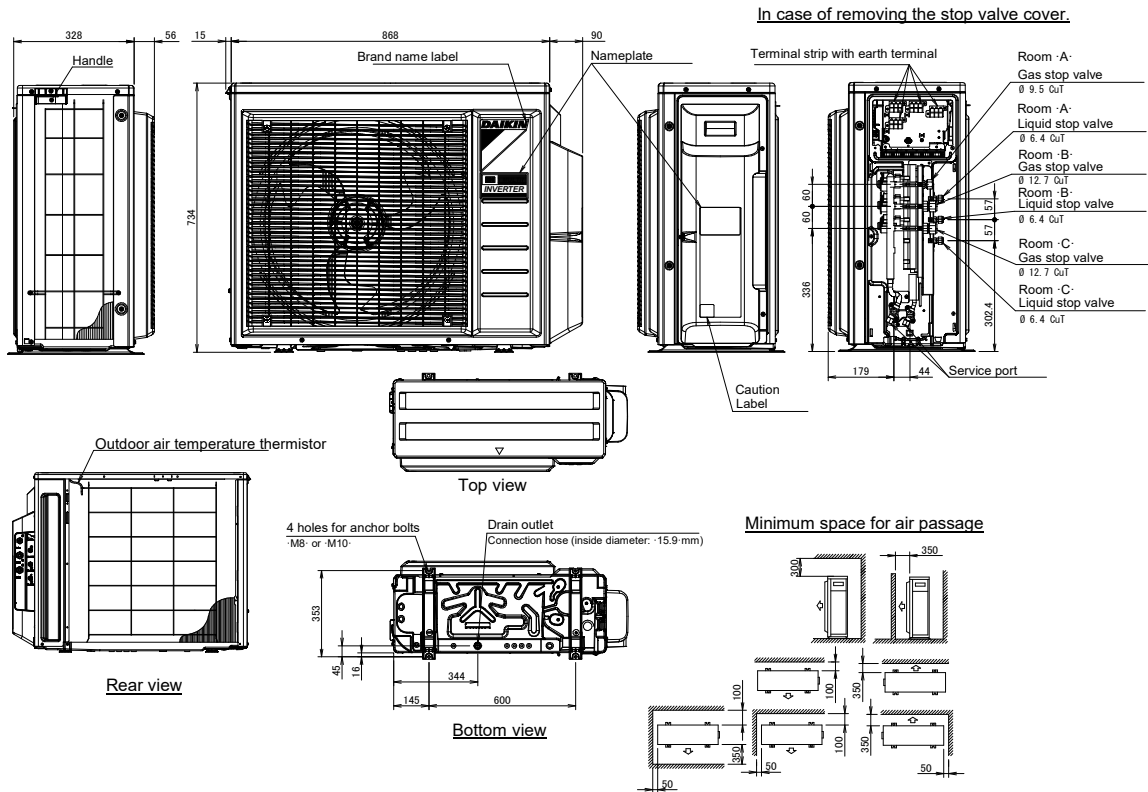

3D102035B

3MXM68N9

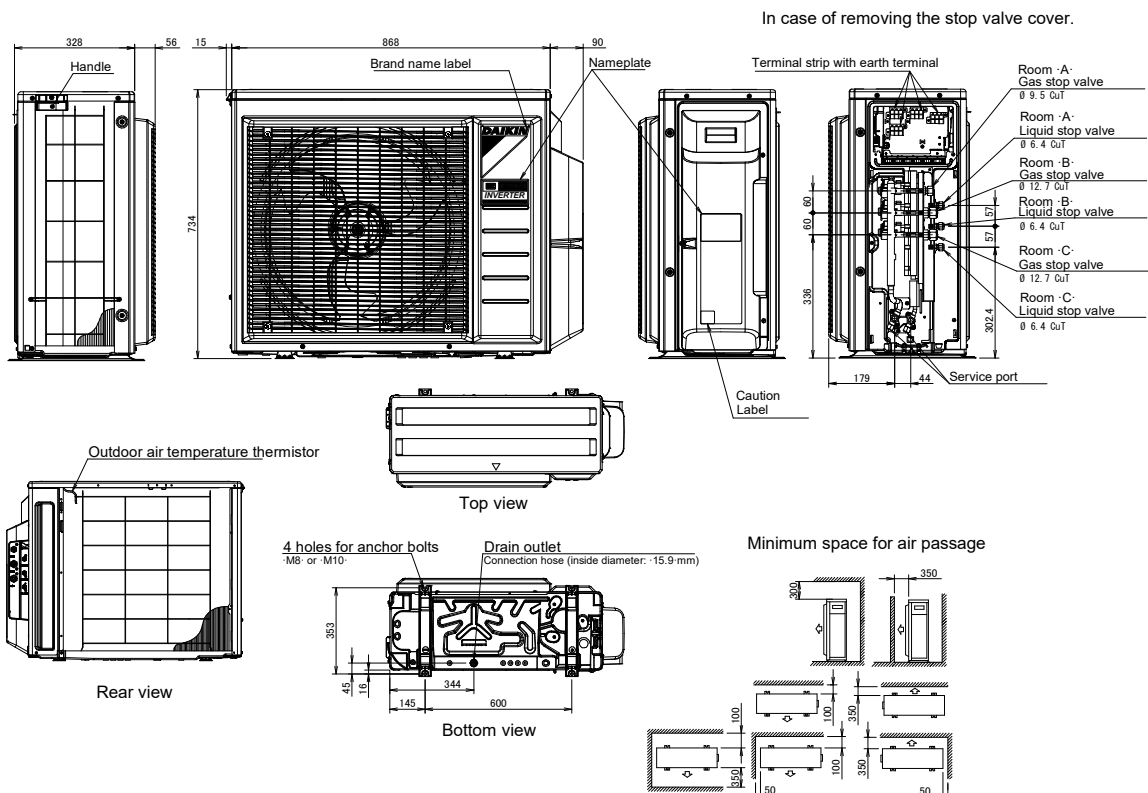


3D102734C

7 Centre of gravity


7 - 1 Centre of Gravity

3MXM40-52N9

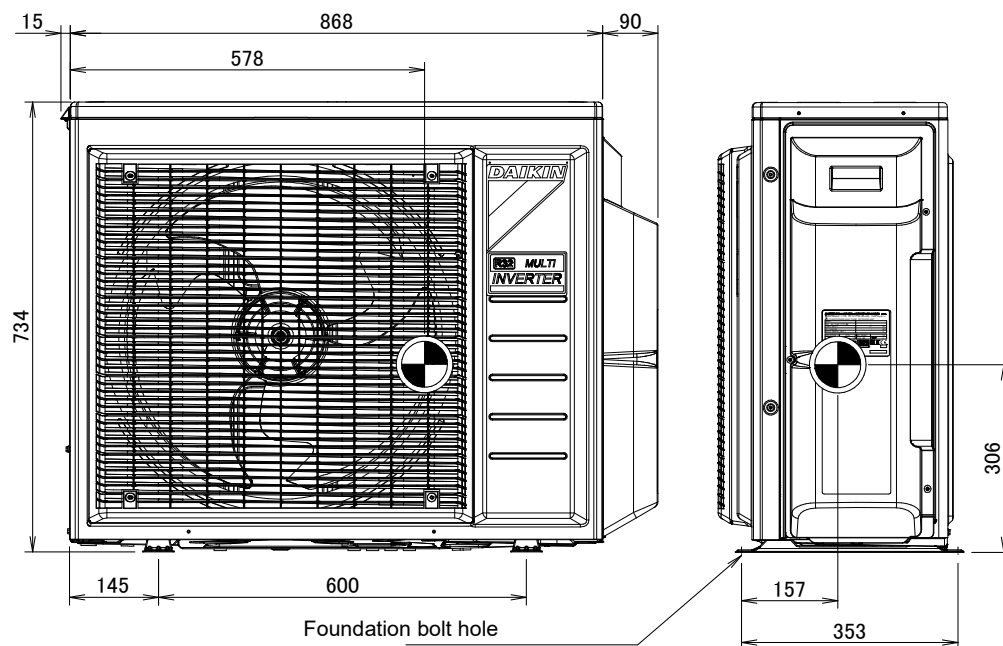

4D102202B

3MXM68N9

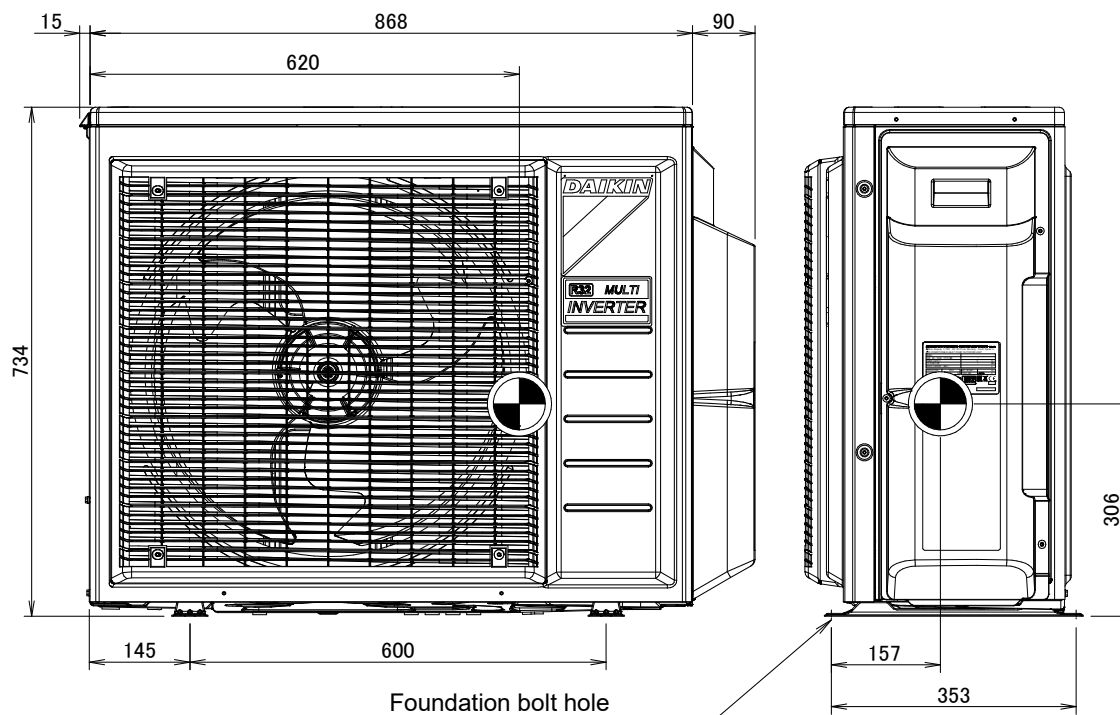


4D102822B


8 Piping diagrams

8 - 1 Piping Diagrams

3MXM40-52N9

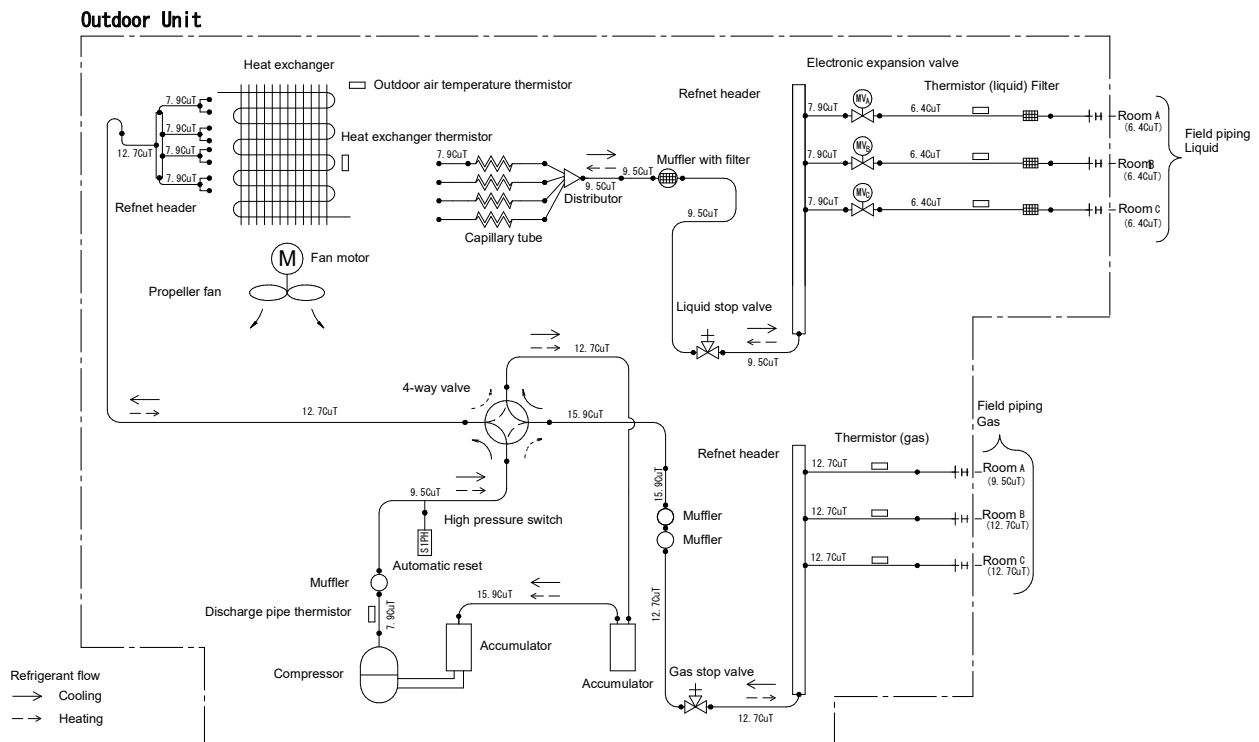


3MXM68N9

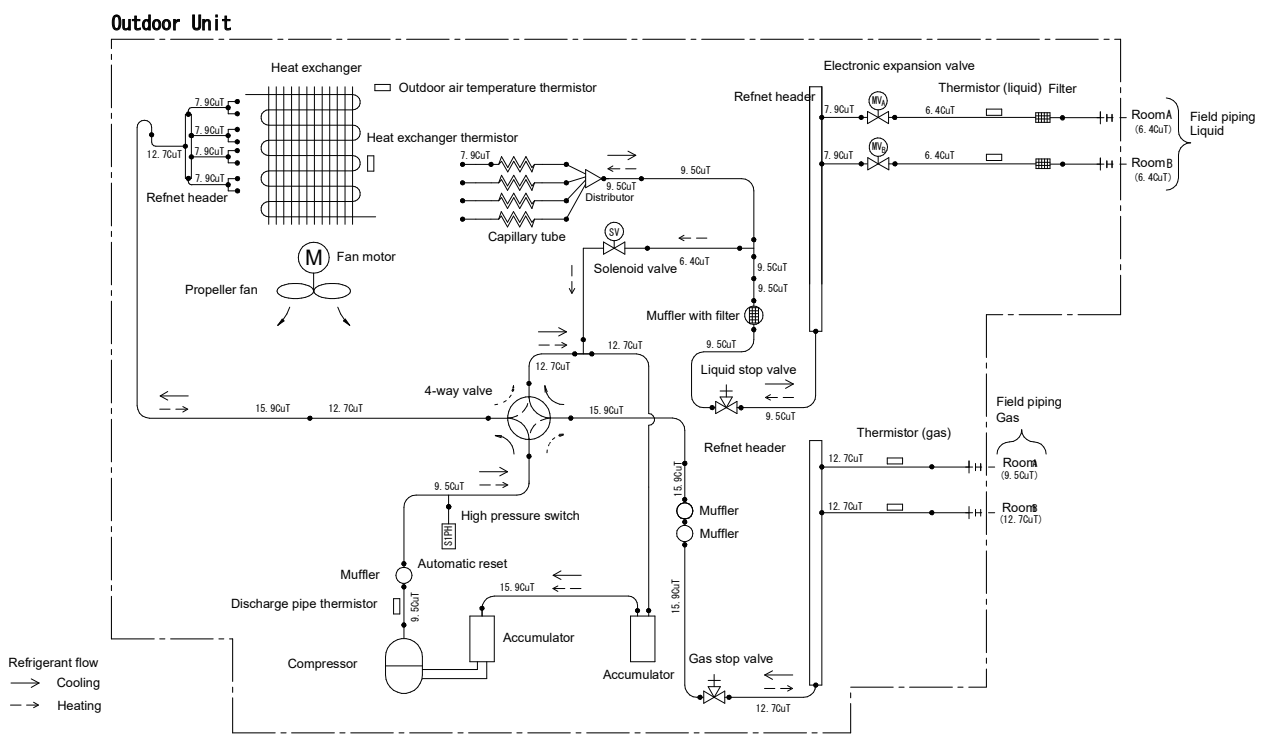

9 Wiring diagrams


9 - 1 Wiring Diagrams - Single Phase

3MXM40-52N9

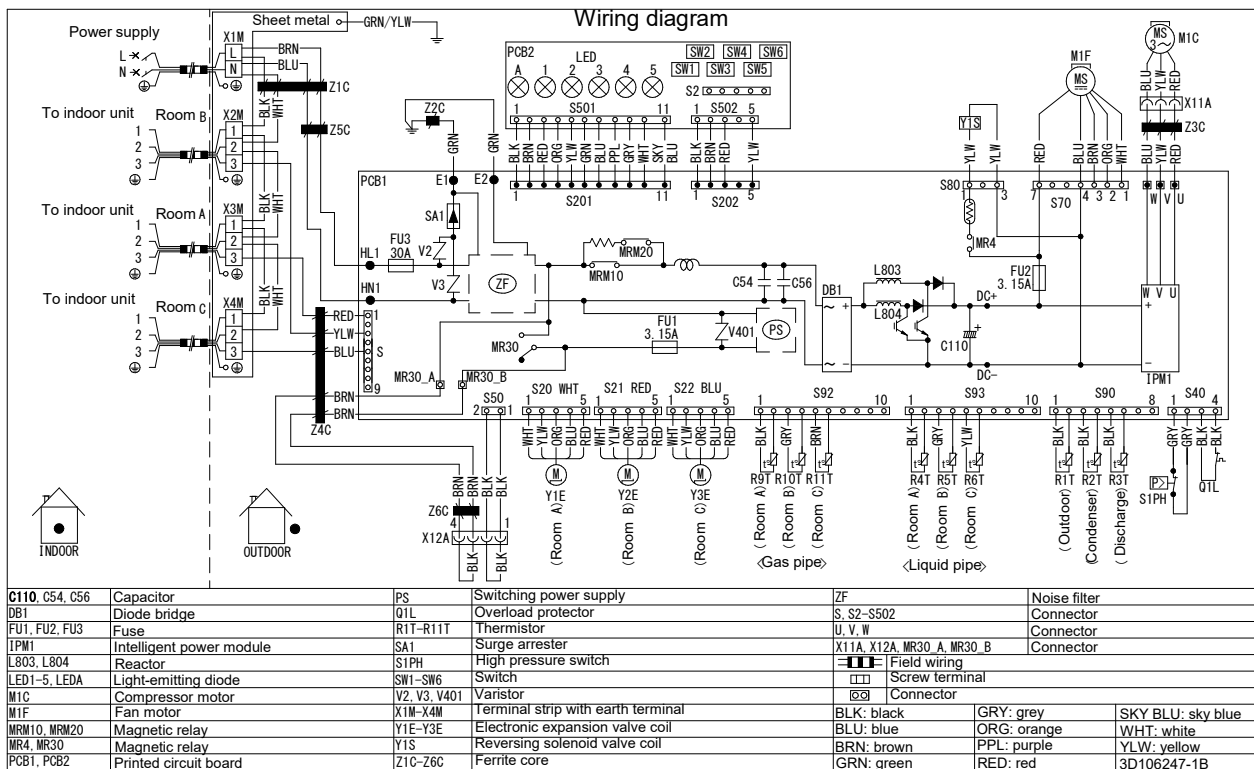

3D106247B

3MXM68N9

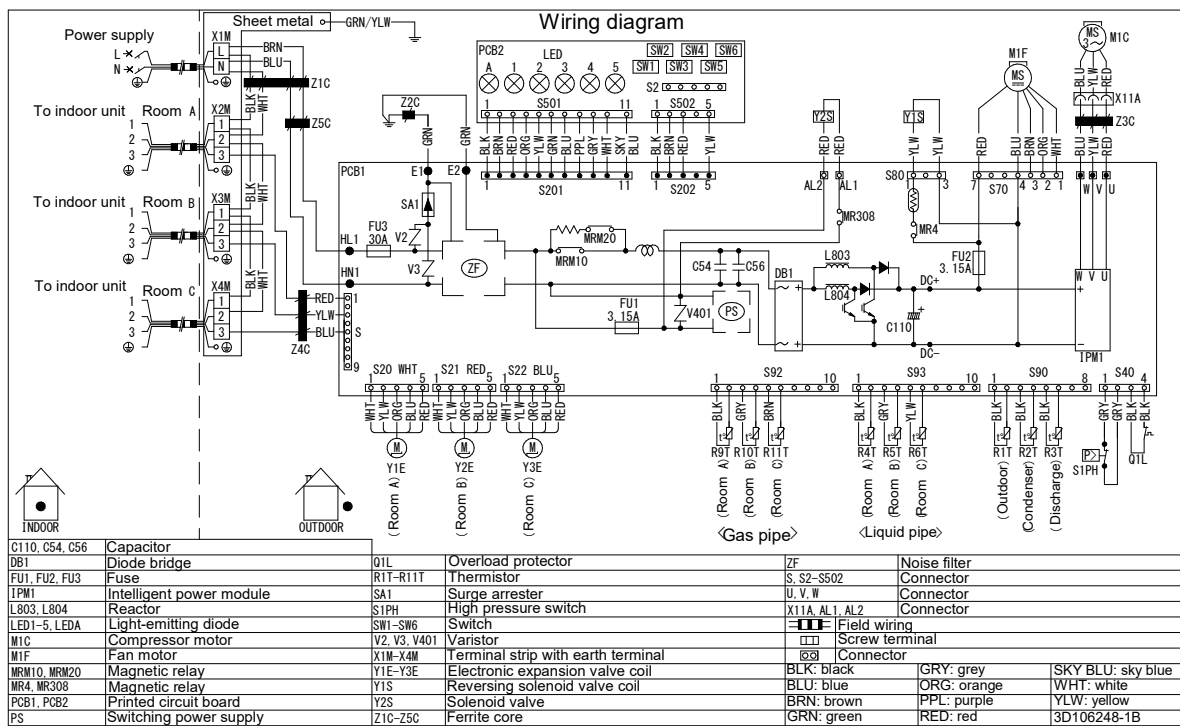


3D106248B

10 Sound data

10 - 1 Sound Pressure Spectrum

3MXM40-52N9

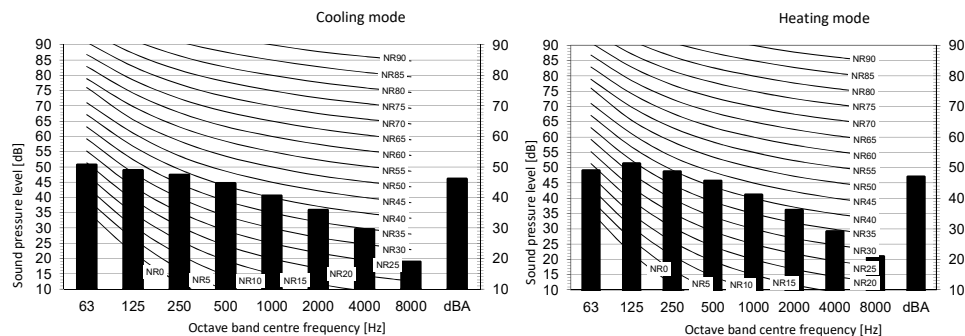


Notes

- Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
- Background noise already taken into account.
- Operating noise varies depending on operation and ambient conditions.
- The operation noise measuring method is in accordance with JISC9612.
- Measuring location: anechoic chamber
- The values above are for connecting with the following indoor unit types:
1.5, 2.0, 2.5, 3.5, kW Class

3D106222B

3MXM40-52N9

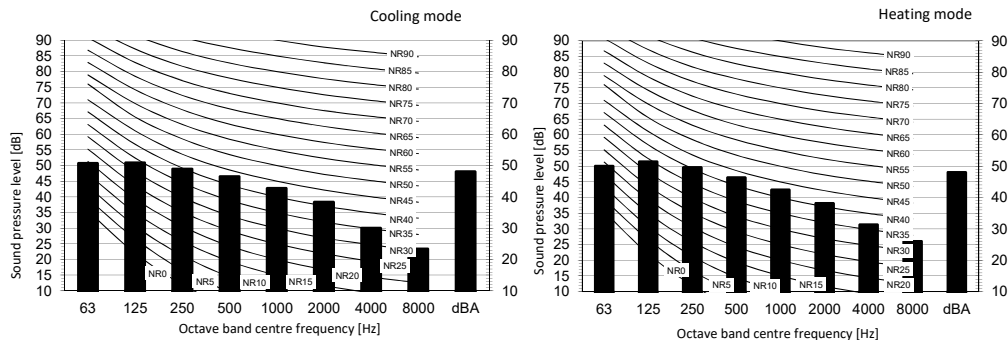

Notes

- Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
- Background noise already taken into account.
- Operating noise varies depending on operation and ambient conditions.
- The operation noise measuring method is in accordance with JISC9612.
- Measuring location: anechoic chamber

3D106223B

11 Operation range

11 - 1 Operation Range

11


3MXM52N9

3MXM68N9

Hybrid unit operation only

Outdoor temperature
[°C WB] [°C DB]


See note ·2·.

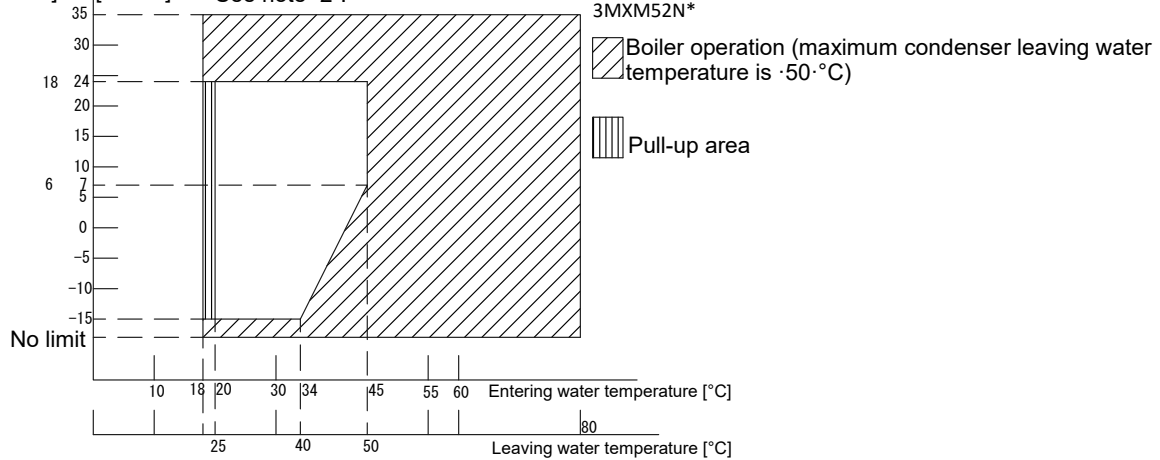Applicable models
3MXM52N*


Hybrid unit operation only


Outdoor temperature
[°C WB] [°C DB]

See note ·2·.

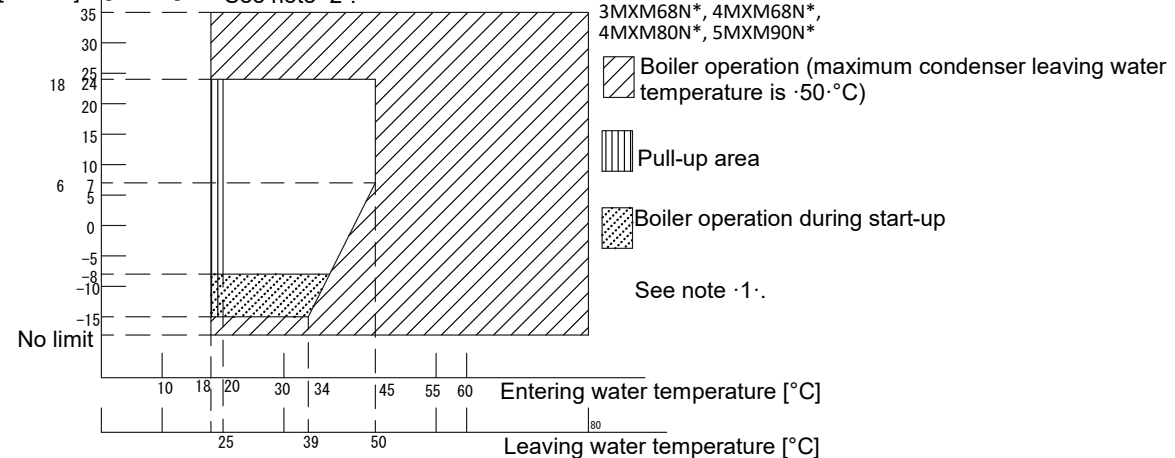Applicable models
3MXM68N*, 4MXM68N*,
4MXM80N*, 5MXM90N*


Domestic hot water heating mode

Outdoor temperature
[°C DB]

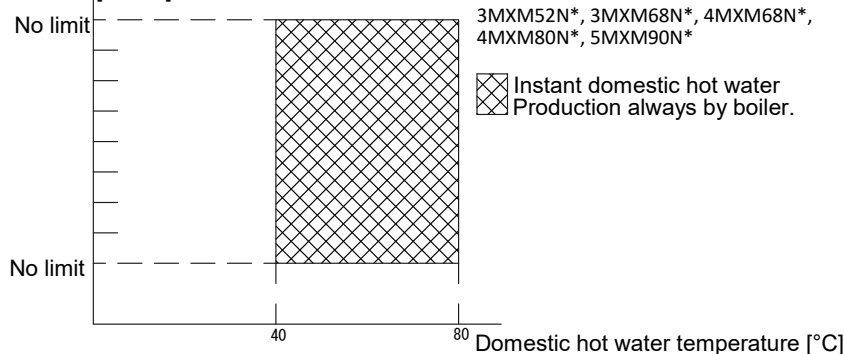Applicable models
3MXM52N*, 3MXM68N*, 4MXM68N*,
4MXM80N*, 5MXM90N*


Notes

- When the heat pump is operating and the ambient temperature drops below -8°C , then the heat pump will keep operating.
- The purpose of Hybrid for Multi in combination with Multi Outdoor unit is for Heating only (space heating and DHW (by boiler only)). The target use of the air conditioner indoor unit in such a system is for cooling only.

A combination of Hybrid and Air conditioner indoor unit, both in heating operation, is NOT the main objective of such a system.



Hence, the heating comfort or continuous operation of the air conditioner indoor unit cannot be guaranteed over the complete operation range.

3D109333

11 Operation range

11 - 1 Operation Range

3MXM-N9

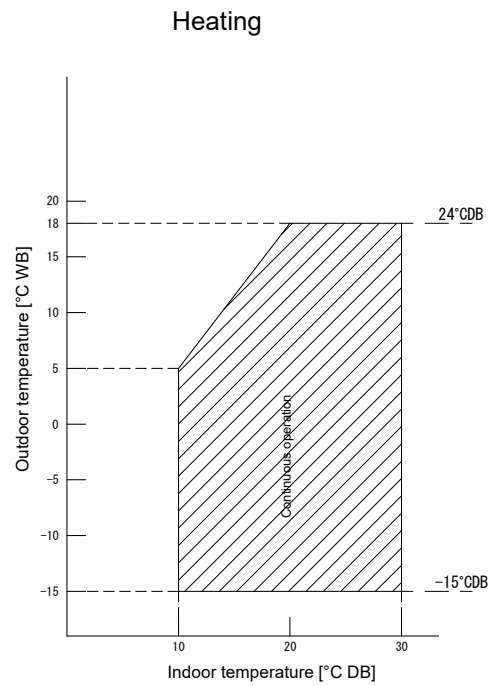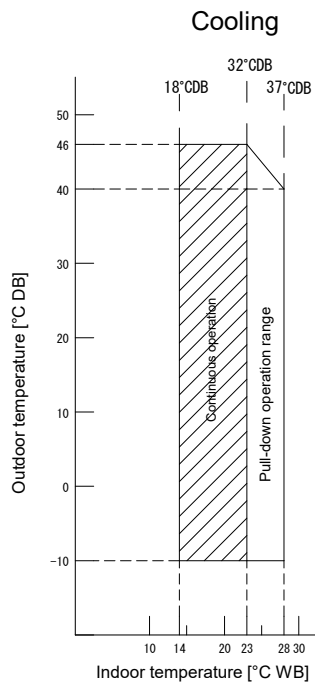


Notes

- The graph is based on the following conditions.
Corresponding refrigerant piping length: 5 m
Level difference: 0 m
Air flow rate High

3D101376D

Daikin Europe N.V. Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Responsible Editor)



EEDEN20

08/2020



Daikin Europe N.V. participates in the Eurovent Certified Performance programme for Fan Coil Units and Variable Refrigerant Flow systems. Check ongoing validity of certificate: www.eurovent-certification.com

The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.