

REV	05
Data	Feb 2024
Supersedes	D-SSMAC01310-22_04

Service Manual**Startup Guide – EWAD-TZB, EWAH-TZB, EWAD-TZC, EWAH-TZC, EWAD-MZB, EWAD-MZC**

Contents

1 Technician Qualifications	3
2 Required Tools and Supplies	3
3 Collaboration and Responsibilities	4
4 Before Arriving at Jobsite.....	4
5 Upon Arrival at Jobsite	4
6 Pre-Power on Checks	5
6.1 Visual Inspection.....	5
6.2 Leak Test.....	5
6.3 Water Piping System Check.....	5
6.4 Water Flow	5
6.5 Electric Connections Check.....	6
7 Pre-Startup Checks.....	7
7.1 Voltage Check	7
7.2 Flow Switches.....	7
7.3 Control Settings	7
7.3.1 Unit Configuration.....	7
7.3.2 Circuit configuration.....	9
7.3.3 Options Configuration.....	10
7.3.4 Software Options.....	12
7.4 Fan layout.....	12
7.5 Twin evaporator pump setting	12
7.6 Alarm Limits.....	12
7.7 Energy Meter	13
7.8 Liquid Probe (OPT. 186 Performance Monitoring).....	15
7.8.1 Liquid Probe mounting instructions	15
7.9 Pre-Running Adjustments	16
7.9.1 Check and calibration of unit temperature sensors	16
7.9.2 Check and calibration of circuit temperature sensors.....	16
7.10 Dry Tests.....	17
7.10.1 Unit Alarm	18
7.10.2 Pump #1/#2.....	18
7.10.3 Circuit Alarm.....	18
7.10.4 Fan	18
7.10.5 Oil/VFD Heaters	18
7.10.6 VR Slides	18
7.10.7 Expansion Valve.....	18
7.10.8 Eco Expansion Valve.....	18
7.10.9 High Pressure Switches Test.....	18
7.10.10 Compressor addressing.....	18
7.10.11 Economizer antichattering system test.....	19
8 Start-Up	20
8.1 Running Adjustments	20
8.1.1 Check and calibration of pressure transducers.....	20
8.1.2 Subcooling measurement point.....	21
8.2 Running Safeties Test.....	22
8.2.1 Flow Switches	22
8.3 Data acquisition	22
9 TABLES	24
9.1 Unit Layout (Table A)	24
9.1.1 EWAD/H TZ-B and EWAD-MZB layout	24
9.1.2 EWAD TZ-C, EWAH TZ-C, EWAD-MZ-C layout.....	26
9.2 Unit configuration (Table B).....	29
9.2.1 EWAD TZ-C, EWAH TZ-C	29
9.2.2 EWAD MZ-C	32
9.2.3 EWAD TZ-B and EWAH TZ-B.....	34
9.2.4 EWAD MZ-B.....	40
9.3 Pump Inverter Settings (Table C)	42
9.4 Pre-Commissioning Sheet (Table D)	43
9.5 Commissioning Sheet (Table E)	44
10 APPENDIX	45
10.1 VFD Addressing procedure by controller	45
10.1.1 Circuit 2 compressor inverter address configuration	45
10.1.2 Reset compressor inverter address circuit 1	45
10.1.3 Filter setting on the pressure transducer reading.....	46
10.2 Economizer line anti chattering troubleshooting.....	46

1 Technician Qualifications

Initial startup on Daikin chillers must be performed only by Daikin Service Technicians or Authorized Service Providers. The contents of this manual are not intended as a substitute for professional skills training, or knowledge and practice of industry standards. Additional literature will be required that is product and component specific, including: product Installation Manuals, Service Bulletins, selection data, system control and piping specifications, etc. (see List of References on *Paragraph 2* for a list of some supplemental items).



The following information is intended only as a guide for authorized personnel with a sound basic knowledge of HVAC equipment, mechanical systems, electrical wiring, controls, & microprocessors. Attempts by untrained or unauthorized persons to start, operate and service this equipment can result in equipment failure, personal injury, or death, as well as invalidation of product warranty. It is the responsibility of the technician to ensure that proper safety equipment safe practices are used.

Be sure that before beginning any work, the Startup Service Technician has reviewed and is thoroughly familiar with all Daikin Factory Service Safety Policies and Procedures and has reviewed any Service Bulletins or Rapid News regarding this product.

2 Required Tools and Supplies

In addition to standard tools needed on most service jobs, be sure to bring the following items to the jobsite for Startup:

- Personal Protective Equipment (Safety)
- Commissioning Sheet
- Chiller Technical Data, Selection Sheet, and Certified Submittal Drawings
- Manuals:

Note: Be sure that all manuals are the current revision appropriate for this unit.

- This Manual: Startup Guide – EWAD-TZB, EWAH-TZB, EWAD-TZC, EWAH-TZC, EWAD-MZB, EWAD-MZC
- Installation, Operation and Maintenance Manual Air cooled chiller with inverter driven screw compressor (D-EIMAC01603-18_03EN)
- Control Manual: Air cooled chiller with inverter driven screw compressor (D-EOMZC00309-19_02EN)
- EWAD_TZ P&ID (last revision) – check in IOM Manual
- Wiring Diagram



INFORMATION

DAE TZ Family IOM and OM pdf documents, are available in different languages at the following public portal link: [Daikin Screw inverter EWAD\(H\)-TZ](#)

- Other technical reference material as necessary
- Current operating software version downloaded and ready to install if needed:
 - Last ATLAS version available on official repository
- Miscellaneous gauges and hand tools, including:
 - Electronic Leak Detector
 - Differential Pressure Gauge (*adequate for system pressures*)
 - Phase Rotation Meter
 - Refrigeration Gauge Manifold (*Range: 50bar, Accuracy: ±0.5% of Final Value, Resolution: 0.01bar/0.1psi/1kPa*)
 - Digital thermometer (*Range: -50°C/+150°C, Accuracy: ±0.1°C, Resolution: 0.1°C*)
 - Amp probe
 - Voltmeters
 - Recover refrigerant cylinder (*for eventual charge adjustments*)

- Full refrigerant cylinder (*for eventual charge adjustments*)
- Recovery pump (*for eventual charge adjustments*)

3 Collaboration and Responsibilities

Throughout the installation and startup process, members of the Daikin Service Department (Supervisor / Coordinator / Technician) must establish contact and meet regularly with the following persons and/or their designated representatives:

- Mechanical, Electrical, and Controls Contractors
- Installing Contractor
- Daikin Sales Department
- Customer/Owner
- Personnel to be trained in unit operation

It is the responsibility of the Daikin Service Representative to ensure that all items on the *Pre-Power On Checklist* are complete and the system is ready for start-up. Upon arrival at the jobsite, the DAIKIN Service technician will verify that all items on the *Pre-Power On Checklist* are complete.

The Chiller Start-up Technician must confirm that the unit installation conforms to Daikin specifications and requirements. This includes mounting and support, piping, electrical and control installations related to the unit. These items must, as a minimum, meet acceptable industry standards and Daikin published requirements. All factory supplied controls and valves must be set and, where required, calibrated. Electrical power and control wiring must be selected and sized as specified by Daikin and the applicable electrical code.

The various contractors associated with the installation have the responsibility to provide the following items (as noted on the Pre-Start Checklist), in accordance with the product IOM, applicable codes and acceptable practices for the trade involved. Note any discrepancies on Commissioning Sheet and notify Supervisor as appropriate. Ensure that access to appropriate systems is available for startup operations.

4 Before Arriving at Jobsite

- Review and Verify Pre-Commissioning Sheet received from the Installer/Customer (*Table D*) Company/Contractor.
- Review Required Materials List on (refer to paragraph 2) and gather necessary items.
- Review Unit Design Specifications.
- Review Unit Selection Sheet.
- Review Startup Guide and Commissioning Form.
- Review IOM.
- Review Control Manual.
- Establish estimated timeline and milestones for Startup.

5 Upon Arrival at Jobsite

Meet with Mechanical, Electrical, and Control Contractors to discuss Startup Process and identify any potential issues that may interfere with a successful startup.

Be sure to meet with the Controls Contractor to discuss and clarify the chiller control sequence and settings for the chiller, towers, pumps, BAS integration, etc...

6 Pre-Power on Checks

Initial Chiller Inspection has to be performed according to the **Pre-Power On Checklist** of the Commissioning Sheet by following the instruction below shown.



Verify that all the items are correct. If the system is not ready and/or items on the Pre-Power On Checklist are incomplete, the technician should immediately notify his supervisor and request direction on how to proceed. A separate work order authorization may be required.

6.1 Visual Inspection

- Inspect the chiller for shipping/installation damage including fans and internal parts of condenser.
- Verify that chiller is adequately located, and level mounted as per the IOM (**Paragraph 4.4**) according to the minimum space requirements (**Paragraph 4.5**)
- Verify that appropriate anti-vibration pads are installed.
- Visually inspect for oil and refrigerant leaks.
- Record component model and serial numbers as appropriate on Commissioning Form.
- Clean the chiller from any foreign debris and surrounding area.

Note any issues in the Commissioning Form (**Pre-Startup Comments**)

6.2 Leak Test

Before to start with Leak Test, verify that during stock period (from Delivery Date), leak tests have been performed periodically as per local FGas Regulation. Collect all leak test reports for recording purpose.

Connect service gauges. Confirm pressure in the condenser and evaporator, to verify that charge was not leaked during storage/shipping. Using Electronic Leak Detector, leak check entire unit. Be sure to note any leaks found and repairs performed on the Commissioning Sheet. Follow all applicable industry and regulatory authority standards. If refrigerant loss is catastrophic, startup may need to be postponed until appropriate warranty leak repairs are completed.

Note any issues in the Commissioning Form (**Pre-Startup Comments**)

6.3 Water Piping System Check

- Verify water piping as per IOM (**Paragraph 4.7**). The water filter must be installed as close as possible to the chiller, as in Figs. 8 and 9. If the water filter is installed in another part of the water system, the Installer has to guarantee the cleaning of the water pipes between the water filter and the evaporator. Missing filter results withdraw of heat-exchangers warranty.
- Verify if proper glycol percentage for the application in accordance with Daikin specifications is present as per IOM (Paragraph 2.12)
- Walk length of piping system (in equipment area). Ensure that connections are correctly installed, and piping is properly supported (i.e., not supported by the chiller). Flanges must not be stressed.
- Check evaporator piping for proper flow direction through vessels by consulting Dimensional Drawing. If flow is incorrect, notify Mechanical Contractor, Service Supervisor, and Sales Rep.
- Verify that water pressure gauges are installed at proper locations
- Confirm that all piping specialties (expansion tank, make-up, relief, vents, etc), water pumps are properly installed.

Note any issues in the Commissioning Form (**Pre-Startup Comments**)

6.4 Water Flow

Use Differential Pressure Gauge at the inlet/outlet nozzles of the unit connections to measure the pressure drop across the exchanger/exchangers.

Compare actual flow with Pressure Drop specified on the Unit Selection Sheet. Verify that actual flow is in line with the selection data.




If the measured flow isn't in line with the selection data, then refer to the CSS (Chiller Selection Software) for the verification of allowability of the measured water flow.

If flow is outside of acceptable margins, corrective action is required. If flow is too high, valves may be adjusted to trim flow. If flow is too low, notify Installing Contractor, and note on the Commissioning Form. If flow is different from the selection data, notify Service Supervisor and Sales Rep. Correction may be required prior to startup.

Note any issues in the Commissioning Form (**Pre-Startup Comments**)

6.5 Electric Connections Check

- Verify the Electric connections, Cable requirements, Interconnection cables and Phase unbalance as per IOM.
- Verify the proper electrical phasing U-V-W of the loads (fans, compressors, and pumps) for L1, L2 and L3 respectively.
- Verify Field wiring correctness according to the unit wiring diagram

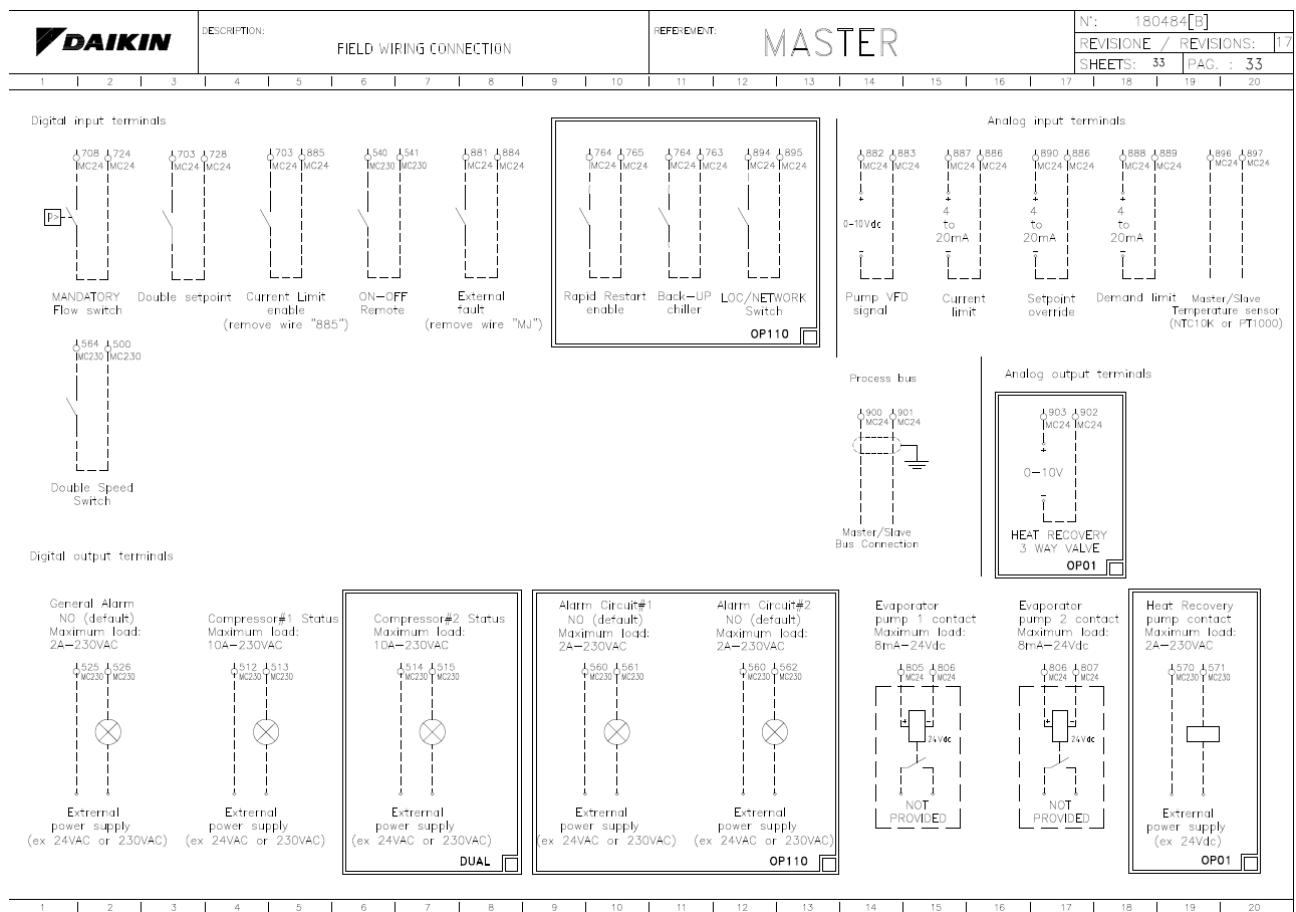

**External power supply needed for Digital output terminals
Analog Inputs must be generated through external auxiliary voltage**

Note any issues in the Commissioning Form (**Pre-Startup Comments**)

7 Pre-Startup Checks

Once the “*Pre-Power On Checks*” are completed, the technician can proceed with the Pre-Startup Checks by turning on the unit main switch.

Pre-Startup checks must be performed according to the ***Pre-Startup Checklist*** of the Commissioning Sheet by following the instruction below shown.



Make sure that unit switch (Q0) is set in OFF state before turning on the unit main switch



Verify that all the items are correct. If the system is not ready and/or items on the Pre-Startup Checklist are incomplete, the technician should immediately notify his supervisor and request direction on how to proceed. A separate work order authorization may be required.

7.1 Voltage Check

- Verify the electric Main voltage and frequency
- Verify all on-board auxiliary transformer voltages
- Check the Compressor Heater current

Note any issues in the Commissioning Form (***Pre-Startup Comments***)

7.2 Flow Switches

- Check the water flow safety switches: verify that field-installed flow switches are installed as per the manufacturer's instructions and IOM.
- Any differential pressure switch connections must be made across the vessel they protect.
- Field-installed Flow switches should not be located close to any source of turbulence and should be located in inlet or outlet piping of the vessel away from any shutoff valves or isolation devices.
- Verify flow switches operation, by throttling the flow and verify that switch opens when flow rate falls below 50% of nominal operating flow rate.

Note any issues in the Commissioning Form (***Pre-Startup Comments***)

7.3 Control Settings

- Check all MicroTech IV controller settings to verify they are optimized for application conditions.
- Download and/or install updated software as needed.



INFORMATION

For more information about installing and updating software, refer to “***SIEMENS CONTROLLER SOFTWARE UPDATE***” Manual:

- **DENV affiliates** the manual is available on MyDaikin.eu in the product page of EWAD-TZ
- **DAE direct affiliates and distributors** the manual can be requested to DAE Service Support department

-
- Verify settings of all safety and operating controls.

7.3.1 Unit Configuration

On the unit controller, enter the “Technician Password” and go into Main Menu → Commission Unit → Configuration → Unit

Setpoint	Default	Range	Description
Apply Changes=	No	No Yes	Use this command to reset the controller in order to confirm the configuration made

Unit Type	EWAD TZ B	TZ TZ B TZ C MZ B	Select the type of chiller. EWADxxxTZxx → EWAD TZ EWADxxxTZxxB → EWAD TZ B EWADxxxTZxxC → EWAD TZ C EWAHxxxTZxxB → EWAH TZ B EWAHxxxTZxxC → EWAH TZ C EWADxxxMZxxB → EWAD MZ B EWADxxxMZxxC → EWAD TZ C Note: the model EWAH must be selected as TZ C & EWAD MZ C must be selected as TZ C.
Refrigerant	R134A	R134A R1234ZE R513A	Select the type of refrigerant
Number of Ckts=	2	1 2	Define the number of circuits
Comp Type=	None	Not Set 310-240 S 310-240 L F4AL 3120 3122 F3AL F3AS F3BL	Select the compressor model according to the machine model, referring to the unit configuration tables (Table B) / compressor nameplates. Check that the compressor model is corresponding to the nameplate info, shown in the "Style" field on the compressor label.  <p>The image shows a close-up of a compressor nameplate. At the top, it says 'DAIKIN CE' with a checkmark symbol. Below that, it says 'Screw Compressor'. There are several fields: 'Model' with the value 'HSA310240LFTQS32VA', 'Eng. Rev.' with a small '1' icon; 'Style' with 'F263TB4RA3LM4PAE2', 'Serial' with a small '1' icon; 'Motor Style' with '236275763', 'Month/Year' with a small '1' icon; 'Volts' with '380', 'Phase' with '3', 'Hz' with '90', and '1' in the last empty box.</p> <p>HSA310240S → 310-240S HSA310240L → 310-240L HSA263 → F4AL HSV(H)263 → F4AL VVR HSA3120 → 3120 HSA3122 → 3122 HSA204 → F3AL HSA192 → F3AS HSA215 → F3BS</p>
Motor	AC	AC DC	Define the type of compressor motor by referring to the configuration Table B. All EWAD/H TZ/MZ C have AC motor compressor All EWAD TZ B version SS have AC motor compressor All EWAT TZ B version XS or PS have DC motor compressor
Inverter Type	DAE	DAE	All production units are equipped with DAE Inverter
Inverter Size	200kW	90kW 120kW 200kW 330kW 400kW	Select the type of inverter installed on the compressor. Refer to Table B.
Fans Control	Step	Step Vfd SpdTrl	Select whether the fans are Direct-start (On Off) or if they are controlled by inverter by referring to the electrical wiring of the unit. Step = All fans are with direct start (On Off) vfd = All fans are controlled by VfD Spdtrl = Only one fan is controlled by VfD and all others are direct starting (On Off)

Fan Type=	AC700	AC700 EC900 AC900 EC900-700 EC700 EC700-600 DC1000-900 EC1400 DC1000 DC1000-700 AC900-700 KMBRS-800 KEMBRS-1050	Select the fan type according to the machine model by reference to the unitconfiguration table (Table B). <u>In case of Kemao fans select AC900</u> Follow the string conversion table below																																																								
		<table border="1" style="display: inline-table; vertical-align: middle;"> <thead> <tr><th colspan="2">FANS TYPE – Unit Configuration (Table B)</th></tr> </thead> <tbody> <tr><td>AC900</td><td></td></tr> <tr><td>AC900L</td><td></td></tr> <tr><td>AC700</td><td></td></tr> <tr><td>EC900</td><td></td></tr> <tr><td>EC900-700L</td><td></td></tr> <tr><td>EC700</td><td></td></tr> <tr><td>EC700L</td><td></td></tr> <tr><td>DC1000L</td><td></td></tr> <tr><td>EC1400</td><td></td></tr> <tr><td>DC1000</td><td></td></tr> <tr><td>DC1000-700</td><td></td></tr> <tr><td>KMBRS-800</td><td></td></tr> <tr><td>KEMBRS-1050</td><td></td></tr> </tbody> </table>  <table border="1" style="display: inline-table; vertical-align: middle;"> <thead> <tr><th colspan="2">FANS STRING – Software Option</th></tr> </thead> <tbody> <tr><td>AC900</td><td></td></tr> <tr><td>AC900-700</td><td></td></tr> <tr><td>AC700</td><td></td></tr> <tr><td>EC900</td><td></td></tr> <tr><td>EC900-700</td><td></td></tr> <tr><td>EC700</td><td></td></tr> <tr><td>EC700-600</td><td></td></tr> <tr><td>DC1000-900</td><td></td></tr> <tr><td>EC1400</td><td></td></tr> <tr><td>DC1000</td><td></td></tr> <tr><td>DC1000-700</td><td></td></tr> <tr><td>KMBRS-800</td><td></td></tr> <tr><td>KEMBRS-1050</td><td></td></tr> </tbody> </table>	FANS TYPE – Unit Configuration (Table B)		AC900		AC900L		AC700		EC900		EC900-700L		EC700		EC700L		DC1000L		EC1400		DC1000		DC1000-700		KMBRS-800		KEMBRS-1050		FANS STRING – Software Option		AC900		AC900-700		AC700		EC900		EC900-700		EC700		EC700-600		DC1000-900		EC1400		DC1000		DC1000-700		KMBRS-800		KEMBRS-1050		
FANS TYPE – Unit Configuration (Table B)																																																											
AC900																																																											
AC900L																																																											
AC700																																																											
EC900																																																											
EC900-700L																																																											
EC700																																																											
EC700L																																																											
DC1000L																																																											
EC1400																																																											
DC1000																																																											
DC1000-700																																																											
KMBRS-800																																																											
KEMBRS-1050																																																											
FANS STRING – Software Option																																																											
AC900																																																											
AC900-700																																																											
AC700																																																											
EC900																																																											
EC900-700																																																											
EC700																																																											
EC700-600																																																											
DC1000-900																																																											
EC1400																																																											
DC1000																																																											
DC1000-700																																																											
KMBRS-800																																																											
KEMBRS-1050																																																											



After termination of the Unit configuration it's necessary to restart the controller to activate the settings made through the "Apply changes" command.



The control part of Micro-channel EWAD/H TZ C, EWAD/H TZ B and EWAD-MZ B/C machines is composed of the controller POL688 + 1 or 2 modules POL98U (depending on whether the machine is Mono or Dual). Once the unit has been configured, after the controller has been restarted, a part of the program will automatically be transferred on the POL98U modules. Be careful not to remove the power supply if the BSP and BUS LEDs of both POL98U modules have become green.

7.3.2 Circuit configuration

Technician Password -> Commission Unit -> Configuration -> circuit #1/circuit #2

Setpoint	Default	Range	Description
Apply Changes=	No		No, Yes
Comp Freq	-	Compressor 310240 S: 60 Hz; 65 Hz; 70 Hz; 75 Hz; 80 Hz; 85 Hz; 90Hz; 95 Hz; 100 Hz; 105 Hz; 110 Hz; Compressor 310240 L: 60 Hz; 65 Hz; 70 Hz; 75 Hz; 80 Hz; 85 Hz; 90 Hz; 95 Hz; 100 Hz; 105 Hz; 110 Hz; Compressor F4AL VVR: 50 Hz; 55 Hz; 60 Hz; 65 Hz; 70 Hz; 75 Hz; 80 Hz; Compressor 3120: 55Hz; 60 Hz; 65 Hz; 70 Hz Compressor 3122: 60 Hz; 65Hz; 70 Hz; 75Hz; 80 Hz; 90 Hz Compressor F3AL: 70Hz; 75Hz; 80Hz; 85Hz; 86Hz Compressor F3AS: 60Hz; 65Hz; 67.5Hz; 68Hz; 70Hz; 75Hz Compressor F3BL: 55Hz; 60Hz; 65Hz; 68Hz; 75Hz; 80Hz; 85Hz	Select the maximum compressor frequency according to the machine model by referring to the configuration tables. (Table B)

C1/2 # Of Fans=	6		Enter the number of fans present on the machine. When the fans are all vfd controlled, this parameter can be changed between 1 and 2. <u>Always leave the setting to 2.</u> When configuring the number of fans in EWAD TZC unit, <u>be careful never to set an odd number of fans!</u>
Heat Recovery=	Disable	Disable, Enable	Select whether the total heat recovery option, is present.



After termination of the circuit(s) configuration it's necessary to restart the controller to activate the settings made through the "Apply changes" command.

7.3.3 Options Configuration

Apply Changes=	No		No, Yes
Evap Pump – Pump Type	On-Off	On-Off Fixed Speed VPF DT	Select whether the evaporator pump (s) are direct-start or if they are controlled by an inverter. ON OFF → Direct Start. Fixed Speed → Allows an automatic pump speed variation, between three different speed settings. VPF → Pump speed is controlled in order to maintain a minimum pressure drop in a remote location of the plant DT → The chiller will modulate the water flow rate based on the chiller delta
Load PD Sns	None	None 0-10V 4-20mA BMS	Type of pressure differential sensor used in the VPF system
Power Supply	400V/50-60Hz	400V/50-60Hz 415V/50Hz 440V/60Hz 460V/60Hz 380V/50-60Hz	Define the voltage grid system: this will determine the undervoltage/overvoltage supervision managed by the compressor inverter
Energy Mtr	None	None Nemo D4-L Nemo D4-Le	Select the type of energy meter device in case present
Leak Detector	None	None Digital Analog	Select the type of leak detector device in case present.
Communication 1	None	None Modbus IP MSTP	Select whether a connected communication module is present on the left side of the controller. Modbus → POL902 BACNet IP → POL908 BACNet MSTP → POL904
Communication 2	None	None Modbus IP MSTP	Select whether a connected communication module is present on the left side of the controller. Modbus → POL902 BACNet IP → POL908 BACNet MST → POL904
Communication 3	None	None Modbus IP MSTP	Select whether a connected communication module is present on the left side of the controller. Modbus → POL902 BACNet IP → POL908 BACNet MST → POL904
Demand Limit	Disable	Disable Enable	Set according to the client request
Flex Current Limit	Disable	Disable	Set according to the client request

		Enable	
Setpoint Reset	None	None 4-20mA Return OAT	In case of setpoint reset request, select on the basis of which sensor the reset will be carried out 4-20 mA → External sensor Return → EEW temp sensor OAT → Unit outside air temp sensor
Fan Alarm	No	No Yes	Select this option if the KQ1 and KQ2 relays are present in the electrical panel
Switch Box Temp	No	No Yes	Select if the switch box temperature probe is present. (HA units)
Rapid Restart	Off	Off On	Enabling the Rapid Restart Function. Check if the option is available on the unit
Ext Alarm	Event	Event Rapid Stop	Set according to the client request
Loc Net Switch	No	No Yes	Set according to the client request
M/S Address	None	None Master Slave 1 Slave 2 Slave 3	Defines if the unit is master or slave
M/S Num Of Units	2	2 3 4	Set according to the number of units in the system
M/S Sns Type	NTC10K	None NTC10K PT1000	Select the type of sensor for the common water temperature sensor?
Display Units	Metric	Metric English	Set according to the client request
Language	English	-	Set according to the client request
Liquid Sensor Enable	Off	Off On	<p>For Unit Type= TZ-TZB-MZB Select "On" if the temperature probe and / or pressure transducer are present on the liquid line. If option 186 is present (Performance Monitoring), select "On".</p> <p>For Unit Type= TZC For EWAD TZC and EWAH TZC always select "On".</p>
Liquid Sensors	Standard	Standard Full	<p>Select Standard if on the liquid line is present the temperature sensor</p> <p>Select Full if on the liquid line is present the temperature sensor and pressure transducer sensor</p>
Solenoid valve	Off	Off On	<p>For Unit Type= TZC or MZC Select always "On"*</p> <p>For Unit Type= TZB or MZB Select "On" if carried out SVI20007 – 3 A (ESV1908487-2A)</p> <p>See the Caution after the table</p>
Apply Changes	No	No Yes	Use this setting to save and confirm all the settings



After termination of the Unit configuration it's necessary to restart the controller to activate the settings made through the "Apply changes" command.



The control part of Micro-channel EWAD/H TZ C, EWAD/H TZ B and EWAD-MZ B/C machines is composed of the controller POL688 + 1 or 2 modules POL98U (depending on whether the machine is Mono or Dual). Once the unit has been configured, after the controller has been restarted, a part of the program will automatically be transferred on the POL98U modules. Be careful not to remove the power supply if the BSP and BUS LEDs of both POL98U modules have become green.



CAUTION

*Solenoid valve setting: This parameter is used to configure the anti-chattering system in the software

After the apply changes function, verify the activation of the Solenoid Valve in the following menus

View/Set Circuit > Circuit ½ > Economizer > Sol Valve > With

The parameter must be set "With". In case the parameter is "Without", change to "With"

7.3.4 Software Options

Software Options (Only for Microtech 4)

The possibility to employ a set of software options has been added to the functionality of the chiller, in accordance with the new Microtech 4 installed on the Unit. The Software Options do not require any additional hardware and regard communication channels and the new energy functionalities.

During the commissioning the machine is delivered with the Option Set chosen by the customer; the Password inserted is permanent and depends on the Serial Machine Number and the Option Set selected.

The available options are:

1. Modbus Slave MSTP for settings refer to BAS integration guide Doc. Name: D-EIGOC00203-21EN_TZ
2. BACNet MSTP for settings refer to BAS integration guide Doc. Name: D-EIGOC00103-21EN-TZ
3. BACNet IP for settings refer to BAS integration guide Doc. Name: D-EIGOC00103-21EN-TZ
4. Performance Monitoring. The Energy Monitoring is a software option not requiring any additional hardware. It can be activated to achieve an estimation (5% accuracy) of the instantaneous performances of the chiller in terms of:
 - Cooling Capacity
 - Power Input
 - Efficiency-COPAn integrated estimation of these quantities is provided
5. iCM Standard for settings and configuration contact servicesupport@daikinapplied.eu
6. iCM Advanced for settings and configuration contact servicesupport@daikinapplied.eu



After termination of the Software Options configuration it's necessary to restart the controller to activate the settings made through the "Apply changes" command.



The control part of Micro-channel EWAD/H TZ C, EWAD/H TZ B and EWAD-MZ B/C machines is composed of the controller POL688 + 1 or 2 modules POL98U (depending on whether the machine is Mono or Dual). Once the unit has been configured, after the controller has been restarted, a part of the program will automatically be transferred on the POL98U modules. Be careful not to remove the power supply if the BSP and BUS LEDs of both POL98U modules have become green.

7.4 Fan layout

The image below shows the activation layout of the unit's fans. The number inside the single square indicates the fan activation digital output.

Quadro Elettrico	1	4	3	6	5	6	5	6	1	4	3	6	5	6	5	6
	4	2	4	5	6	5	6	6	4	2	4	5	6	5	6	6
Circuito 2								Circuito 1								

7.5 Twin evaporator pump setting

In the case of twin evaporator pumps, set the automatic start-up management pumps.

1. Enter technician password in the controller
2. Open the menu:
3. *Main Menu → View / Set Unit → Pumps → Evp Pmp Ctrl → Auto*

7.6 Alarm Limits

On the unit controller, enter the “Technician password” and set the alarm limits in the following menu:

Main Menu → Commission Unit → Alarm Limits




At the end of the Alarm Limits setting a restart of the controller (“Apply Changes”) is required BEFORE to proceed with the startup of the unit.

7.7 Energy Meter

If the unit is provided with Opt.16/16a, proceed with the energy meter settings check.

Function of the buttons:

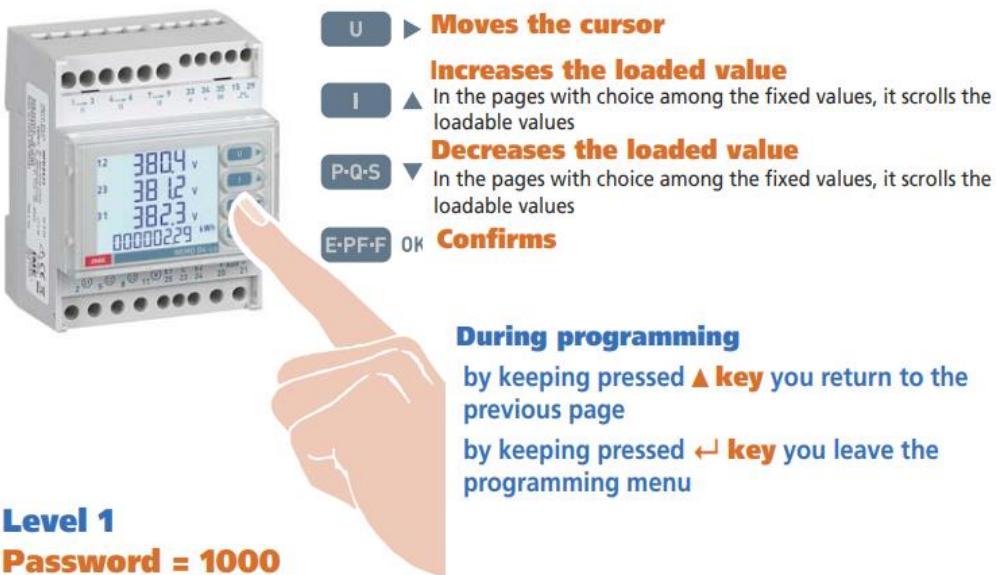

Level 1

Password = 1000

Access the setup menu

- 1) Press “EPFF” repeatedly until the page is displayed : “**Adbs** ”
- 2) Press and hold the “EPFF” button until you see the page: “**PASS**”
- 3) Enter the password “1000” and confirm with the “EPFF” button



The “arrow” ► is used to move between the various digits, while ▲▼ is used to increment or decrement the numerical value of each digit. The ENTER key is used to confirm the password.

Depending on the wiring configuration, the respective programming scheme must be selected.

- 1) Log in with the password “1000”
- 2) Press the “EPFF” button repeatedly until the page is displayed: “**SYS**”
- 3) Select the desired configuration: **3-2e** if the number of current transformers is 2, which is the standard configuration.



In case the energy meter is integrated with the Modbus communication network of the POL688 controller of the chiller unit, the Modbus parameters of the Nemo energy meter needs to be updated. It will be necessary to configure the address, transmission speed and parity bit on the energy meter corresponding to those on the chiller controller (POL688)

- 1) Log in with the password **“1000”**
- 2) Press “EPFF” repeatedly until the page is displayed: “MDB Addr”
- 3) Select Address **20**



- 4) Press “EPFF” repeatedly until the page is displayed “MDB Baud”
- 5) Select the baud rate **19200**



- 6) Press “EPFF” repeatedly until the page is displayed: “MDB par”
- 7) Select **None** Parity bit




- 8) Press “EPFF” repeatedly until the page is displayed “SAVE”



Set the transformation ratio of the current transformers (CT ratio)


On the label of the CT it's indicated what the maximum primary and secondary currents are.
For example max primary current 1250A / max secondary current 5A gives an CT ratio of 250 (1250/5)

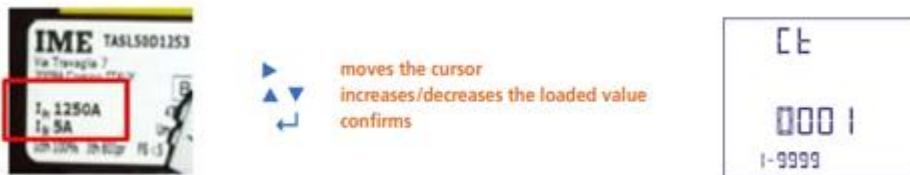

**The nominal current value at the Ime Nemo Energy meter input terminals should be between 1A~5A.
Do not use CT's that exceed this range in order to avoid damage to the energy meter!**

7.8 Liquid Probe (OPT. 186 Performance Monitoring)

TZ Vintage B units not equipped with option 186 are supplied with an additional temperature probe electrically connected in the electrical panel but not configured and not mounted on the liquid line as shown in the photo below.

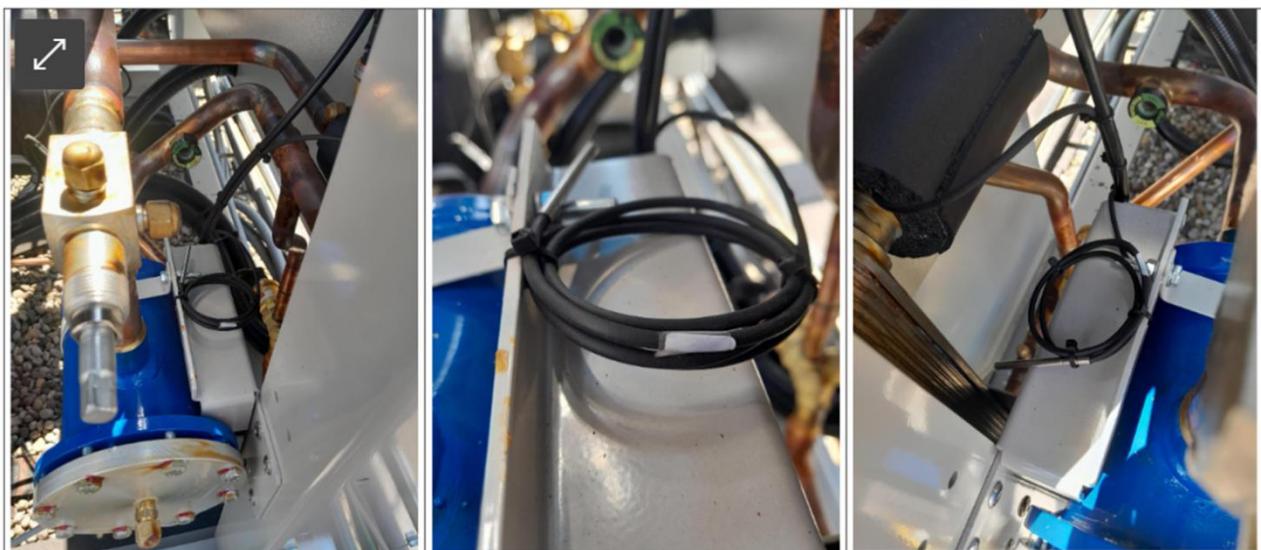

It is highly recommended to protect the unused probe from the external influences

7.8.1 Liquid Probe mounting instructions

1. Place the liquid probe in the correct position on the liquid line pipe and apply the thermal paste and insulation



2. Enable the probe and the Performance Monitoring option from the main controller, refer to [Options Configuration](#) and [Software Options](#) paragraph.

7.9 Pre-Running Adjustments

Pre-Running Adjustments must be separately performed for each circuit



It is highly recommended to use a double sample sensor for the calibration of temperature sensors

7.9.1 Check and calibration of unit temperature sensors

Calibration of unit temperature sensors is a fundamental step for the correct operation of the unit.

There are three temperature sensors to be calibrated (for each circuit):

- Evaporator LWT
- Evaporator EWT
- OAT

7.9.1.1 Evaporator Leaving Water Temperature

- Place the sample and Evap LWT sensors in a container with ice
- Enter in *Commission Unit* → *Sensors Calibration* → *Unit* menu and then compare the *Evap LWT* value with that detected by the sample sensor
- If the temperature value measured by the unit sensor is different from the sample one, set the difference in the *Offset* parameter.



Make sure to have a good water/ice mix and wait for the water/ice system temperature to stabilize before to proceed with the calibration.

Place both sensors (sample and unit) in the middle of the container in order to not affect the readings.

7.9.1.2 Evaporator Entering Water Temperature

- Place the sample and Evap EWT sensors in a container with ice
- Enter in *Commission Unit* → *Calibrate Sensors* → *Unit* menu and then compare the *Evap EWT* value with that detected by the sample sensor
- If the temperature value measured by the unit sensor is different from the sample one, set the difference in the *Offset* parameter.



Make sure to have a good water/ice mix and wait for the water/ice system temperature to stabilize before to proceed with the calibration.

Place both sensors (sample and unit) in the middle of the container in order to not affect the readings.

7.9.1.3 Outside Air Temperature

- Place the sample and suction temperature sensors in ambient temperature
- Enter in *Commission Unit* → *Sensors Calibration* → *Unit* menu and then compare the *OAT* value with that detected by the sample sensor
- If the temperature value measured by the unit sensor is different from the sample one, set the difference in the *Offset* parameter.



Make sure to have a stable air conditions and wait until read unit and sample temperatures are stabilized respect to air ambient temperature before to proceed with the calibration.

7.9.2 Check and calibration of circuit temperature sensors

Calibration of circuit temperature sensors is a fundamental step for the correct operation of the unit.

There are two temperature sensors to be calibrated (for each circuit):

- The Suction temperature sensor (ST-1 & ST-2)
- The Discharge temperature sensor (DT-1 & DT-2)

7.9.2.1 Suction Temperature sensor

- Place the sample and suction temperature sensors in a container with ice
- Enter in *Commission Unit* → *Sensors Calibration* → *Circuit #1/2* menu and then compare the *Suction Tmp* value with that detected by the sample sensor
- If the temperature value measured by the unit sensor is different from the sample one, set the difference in the *Suction Offset* parameter.



Make sure to have a good water/ice mix and wait for the water/ice system temperature to stabilize before to proceed with the calibration.

Place both sensors (sample and unit) in the middle of the container in order to not affect the readings.



Suction temperature sensor is the most crucial of chiller's sensors as will guarantee the correct working of the EXV and consequent safe compressor running

7.9.2.2 Discharge temperature sensor

- Place the sample and discharge temperature sensors in ambient temperature
- Enter in *Commission Unit* → *Sensors Calibration* → *Circuit #1/2* menu and then compare the *Discharge Tmp* value with that detected by the sample sensor
- If the temperature value measured by the unit sensor is different from the sample one, set the difference in the *Disch Offset* parameter.



Make sure to have a stable air conditions and wait until read unit and sample temperatures are stabilized respect to air ambient temperature before to proceed with the calibration.

7.9.2.3 Economizer temperature

- Place the sample and Economizer temperature sensors in ambient temperature
- Enter in *Commission Unit* → *Calibrate Sensors* → *Circuit #1/2* menu and then compare the *Econ Temp* value with that detected by the sample sensor
- If the temperature value measured by the unit sensor is different from the sample one, set the difference in the *Eco Tmp Offset* parameter.



Make sure to have a stable air conditions and wait until read unit and sample temperatures are stabilized respect to air ambient temperature before to proceed with the calibration.

7.9.2.4 Liquid temperature

- Place the sample and Subcooling temperature sensors in ambient temperature
- Enter in *Commission Unit* → *Calibrate Sensors* → *Circuit #1/2* menu and then compare the *Liquid Temp* value with that detected by the sample sensor
- If the temperature value measured by the unit sensor is different from the sample one, set the difference in the *Liquid Tmp Offset* parameter.



Refer to Table A for the complete overview of the components positioning.

7.10 Dry Tests

Perform the Dry Tests by setting the unit in “test mode”:

1. Enter the “Technician Password” on the controller
2. Go in *Main Menu* → *Unit Mode* → *Mode*
3. Set *Test*

All the dry tests are performable through the following menu:

Main Menu → *Commission Unit* → *Manual Control*

7.10.1 Unit Alarm

Check the correct activation of the software general alarm:

Main Menu → Commission Unit → Manual Control → Unit → Unit Alarm

7.10.2 Pump #1/#2

Check the correct activation of the water pump (if it is controlled by the unit):

Main Menu → Commission Unit → Manual Control → Unit → Pump #1/#2 → set Pump Speed in %.

7.10.3 Circuit Alarm

Check the correct activation of the software general alarm:

Main Menu → Commission Unit → Manual Control → Circuit #1/2 → Circuit Alarm

7.10.4 Fan

Check the correct functionality of the fans:

Main Menu → Commission Unit → Manual Control → Circuit #1/2 → Fan speed

In this menu is possible choose the capacity of the fan. Moreover, during this phase check the rotation sense of the fans, if it is right the force of the air must be from the floor to the top.

7.10.5 Oil/VFD Heaters

Check the correct activation of compressor oil and VFD resistances:

Main Menu → Commission Unit → Manual Control → Circuit #1/2 → Oil Heater

Main Menu → Commission Unit → Manual Control → Circuit #1/2 → VFD Heater

7.10.6 VR Slides

Check the correct activation of the compressor VR slides:

Main Menu → Commission Unit → Manual Control → Circuit #1/2 → VRX

7.10.7 Expansion Valve

Verify the correct operation of the EXV valves:

Main Menu → Commission Unit → Manual Control → Circuit #1/2 → EXV Position

And set the opening percentage, it is possible verify the movement of the piston inside the expansion valve through the glass post on it.

7.10.8 Eco Expansion Valve

Verify the correct operation of the Eco EXV valves:

Main Menu → Commission Unit → Manual Control → Circuit #1/2 → EXV Position

And set the opening percentage, it is possible verify the movement of the piston inside the expansion valve through the glass post on it.

7.10.9 High Pressure Switches Test

Test the high-pressure switches by physically disconnecting them from the unit and by testing them until the intervention pressure by connecting them to a pressurized nitrogen cylinder.

7.10.10 Compressor addressing

Electrically disconnect the pressure transducer on the compressor (high or low) and check the activation of the related alarm on the correct circuit.

7.10.11 Economizer antichattering system test

Check the proper functionality and settings of the economizer anti chattering system as per below instructions:

1. Check enabling of the solenoid valves in *Commission Unit → Options* and *View Set circuit* menus
2. Put the Unit in Test Mode and verify the functionality of the corresponding relays:
 - *Unit Mode → Test*
 - *Commission Unit → Manual Control → Circuit 1 or 2 → Suction Solenoid Valve → On*

Circuit 1:

- a) Verify 230V through M230, referring to the unit wiring diagram
- b) Verify 230V through POL945 extension: C1-2 – DO1

Circuit 2:

- a) Verify 230V through M230, referring to the unit wiring diagram
- b) Verify 230V through POL945 extension: C3-4 – DO3

By setting to On, the solenoid valve will be energized and its coil will generate a magnetic field



- *Commission Unit → Manual Control → Circuit 1 or 2 → Discharge Solenoid Valve → On*

Circuit 1:

- a) Verify 230V through M230, referring to the unit wiring diagram
- b) Verify 230V through POL945 extension: C1-2 – DO2

Circuit 2:

- a) Verify 230V through M230, referring to the unit wiring diagram
- b) Verify 230V through POL945 extension: C3-4 – DO4

By setting to On, the solenoid valve will be energized and its coil will generate a magnetic field



8 Start-Up

The first data acquisition for each circuit must be performed in “Cooling mode”, in order to also check the correctness of the refrigerant charge by measuring the subcooling at the filter dryer (refer to E2.10 item of the Commissioning Sheet).



Make sure to open all the service valves before to perform the first unit Start-Up:

- **Liquid line**
 - **Discharge line (if present)**
 - **Suction line (if present)**
 - **Turn on the water pump**
-

To do that, follow these steps, referring to the “Circuit #X”:

1. Enter the “Technician Password” on the controller
2. Go in Main Menu → Unit Mode → Mode and set Cool
3. Go in Main Menu → Unit Enable
4. Set Circuit #1 → Enable, Circuit #2 → Disable
5. Set Unit → Enable
6. Set on Local the switch Q0

The circuit is now ready for the Running Adjustment (paragraph 8.1)

8.1 Running Adjustments

Running Adjustments must be separately performed for each circuit while it is running near the rating conditions.



Make sure that the circuit is working in cooling mode in stable conditions in order to don't affect the following operations result



Make sure that the circuit status is “Run: Normal” before to proceed with the Running Adjustments

8.1.1 Check and calibration of pressure transducers

Calibration of pressure transducers is a fundamental step for the correct operation of the unit. There are two pressure sensors to be calibrated (for each circuit):

- The suction pressure transducers
- The discharge pressure transducers

8.1.1.1 Evaporator Pressure

- Connect the sample transducer to the “T shape” pressure port on which the suction pressure transducer is installed.
- With the unit on, with the *Suction Temperature* of $7^{\circ}\text{C} \pm 1^{\circ}\text{C}$ and before making gas charge adjustments, enter the *Commission Unit* → *Calibrate Sensors* → *Circuit #1/2* menu and then compare the *Evap Pressure* value with that detected by sample transducer
- If the pressure value measured by the unit transducer is different from the sample one, set the difference in the *Evp Pr Offset* parameter.



Sample transducer is the measuring device has been calibrated and it must be very accurate.



If this difference is greater than $\pm 100 \text{ kPa}$ replace the transducer and repeat the operation.



Evaporator pressure transducer is the most crucial of chiller's transducer as will guarantee the correct working of the EXV with consequent safe compressor running and since all low-pressure safeties are based on its readings.

8.1.1.2 Condenser Pressure

- Connect the transducer to the “T shape” pressure port on which the discharge pressure transducer is installed.
- With the unit on, enter in *Commission Unit* → *Calibrate Sensors* → *Circuit #1/2* menu and then compare the *Cond Pressure* value with the one detected by the sample transducer. If the value of the pressure measured by the unit transducer is different from the sample one, set the difference in the *Cond Pr Offset* parameter.



If this difference is greater than $\pm 100 \text{ kPa}$ replace the transducer and repeat the operation.

8.1.1.3 Oil Pressure

- Connect the sample transducer to the “T shape” pressure port on which the oil pressure transducer is installed.
- With the unit on, enter in *Commission Unit* → *Calibrate Sensors* → *Circuit #1/2* menu and then compare *Oil Pressure* value with *Condenser Pressure*.
- If the value of the pressure measured by the *Oil Pressure* transducer is different from the *Condenser Pressure*, set the difference in the *Oil PR Offset* parameter.



If this difference is greater than $\pm 100 \text{ kPa}$ replace the transducer and repeat the operation.

8.1.2 Subcooling measurement point

The calculation of the subcooling at the filter dryer (in addition to the visual inspection of any flash gas on the liquid sight glass) is the main parameter by which the need for a charge adjustment is established. This quantity must be quantified with the least possible margin of error.

What's needed:

- Additional pressure transducer
- Additional temperature sensor

Proceed to the installation as follows:

- The pressure sensor must be installed on one of the two pressure points on the corner tap, close to the dryer filter.

- The temperature sensor must be installed on a smooth pipe section (not on a weld, for example), as close as possible to the pressure sensor mentioned above.



Temperature measurements are among the most difficult to perform. Install the temperature probes with a correct quantity of thermal paste, tighten the probes firmly to the pipe and abundantly insulate the probes so that external agents cannot affect the measurement.

- Subcooling (at the filter dryer) = $5^{\circ}\text{C} \pm 1^{\circ}\text{C}$
- Full liquid sight glass

If the Subcooling value is out of range, then proceed with the charge adjustment by using the recovery pump connected on the condenser outlet (before filter dryer).

The charge adjustment has to be performed step-by-step:

- For 50÷100kg circuits, proceed by adding/removing $\pm 1\text{kg}$ of refrigerant at every step
- For 100÷500kg circuits, proceed by adding/removing $\pm 2\text{kg}$ of refrigerant at every step



After every charge step, wait 5 minutes after the liquid temperature stabilizing before to proceed with the next eventual adjustment step.

8.2 Running Safeties Test

8.2.1 Flow Switches

With the running unit, disable the water pumps and check if “Water Flow Loss” alarm appears after 30sec. If not, check proceed with the check of correct flow switch installation and calibration.

8.3 Data acquisition




Make sure that the circuit is working in stable conditions to don't affect the Data Acquisition



WARNING: In case the check valve economizer port is chattering and the economizer line is roughly vibrating, anti chattering kits must be checked.

If the anti-chattering system does not work properly, refer to paragraph [Economizer line anti chattering troubleshooting](#) to find the root cause.

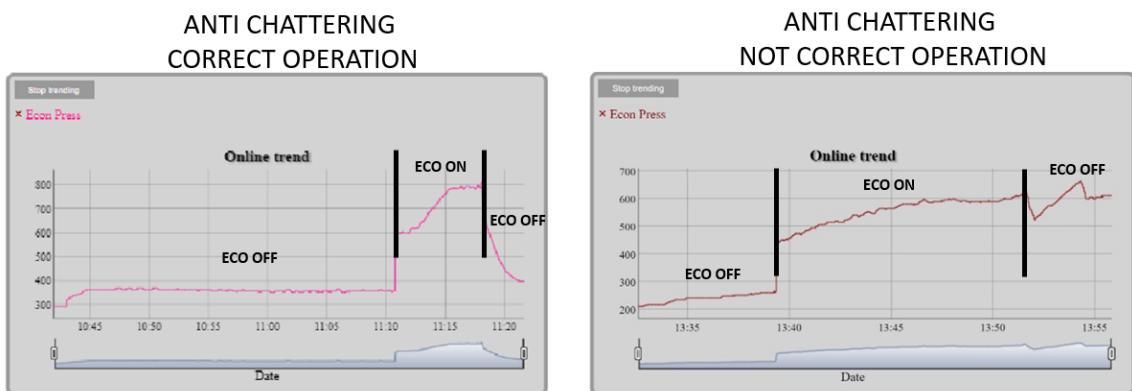

After the Economizer de-activation, the emptying of the economizer line and consequent economizer pressure decreasing to evaporating pressure values is expected

- Data acquisition must be performed according the **Data Acquisition** section of the Commissioning Sheet.
- Data acquisition must be separately performed for each circuit in Chiller and Heat Pump mode. To select the circuit working mode refer to the following setting:

Start in Cool Mode:

Main Menu → Unit Mode → Cool

Enable this setpoint for testing the unit in Mechanical mode and through Unit Enable to select which Circuit to test.

- It is recommended to let the circuit reach the 100% of capacity before to proceed with the data acquisition (according to the plant load conditions).

To evaluate the stable operation of the unit check, following conditions must be satisfied:

- Circuit Status equal to "Run=Normal"
- ELWT and/or CLWT is as near as possible to the relative setpoint
- EXV is working in Superheat mode:
Main Menu → View/Set Circuit → EXV Cool/Heat → State = SSH
- SSH is equal to the SSH target for 5 minutes continuously:
Main Menu → View/Set Circuit → EXV Cool/Heat → SSH Target





**CLIMATIX Scope Light data recording during commissioning is strongly suggested.
For all material required for the recording get in contact with servicesupport@daikinapplied.eu**

9 TABLES


9.1 Unit Layout (Table A)


9.1.1 EWAD/H TZ-B and EWAD-MZB layout

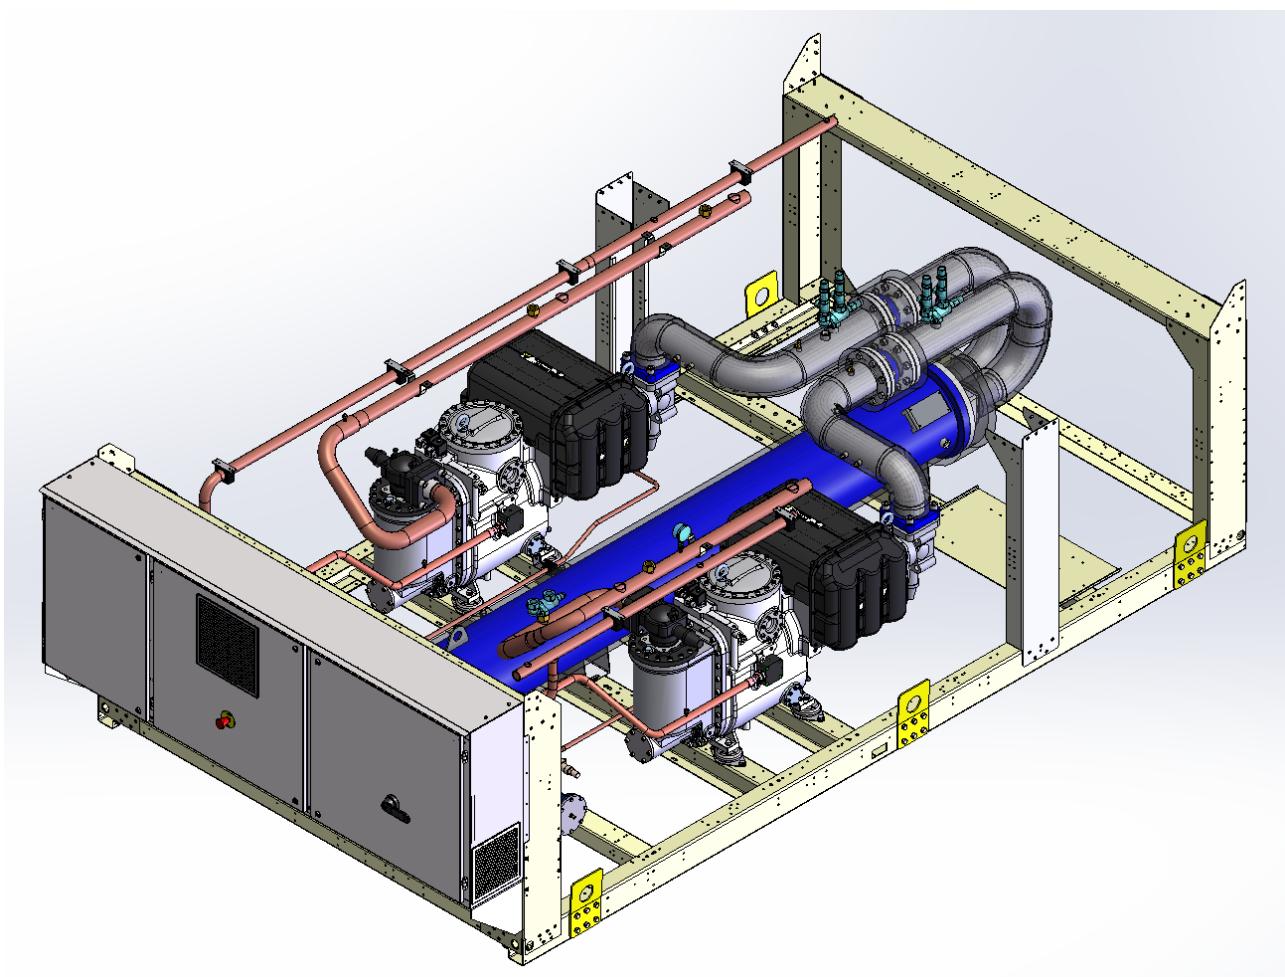

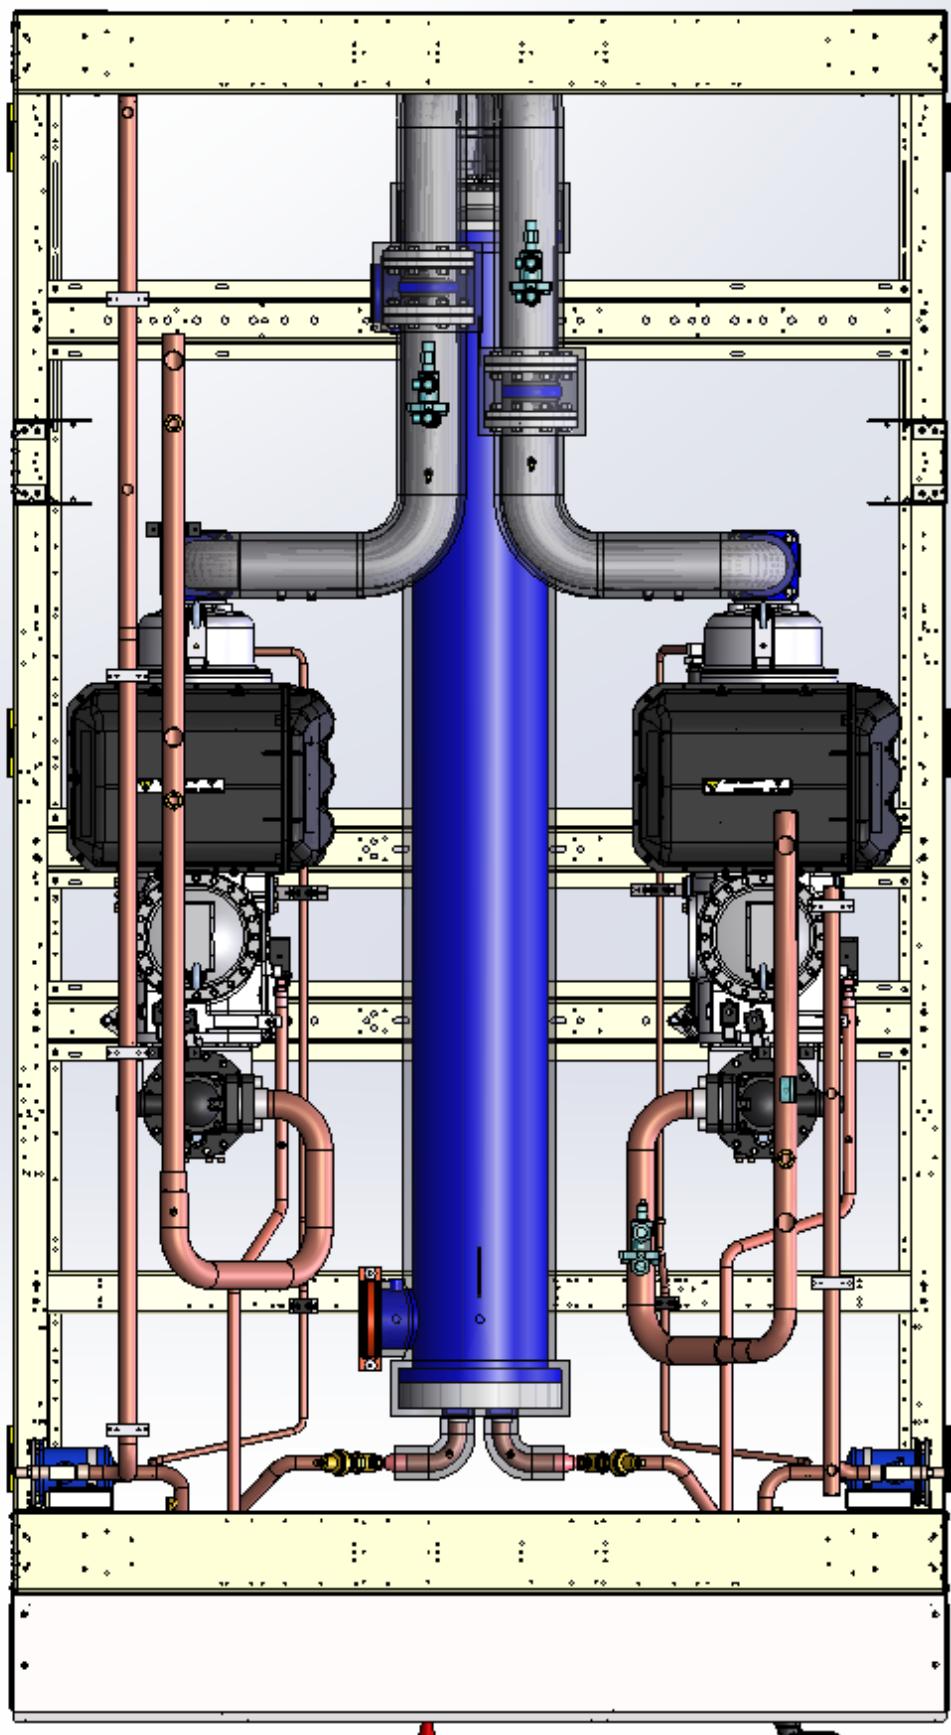

9.1.2 EWAD TZ-C, EWAH TZ-C, EWAD-MZ-C layout

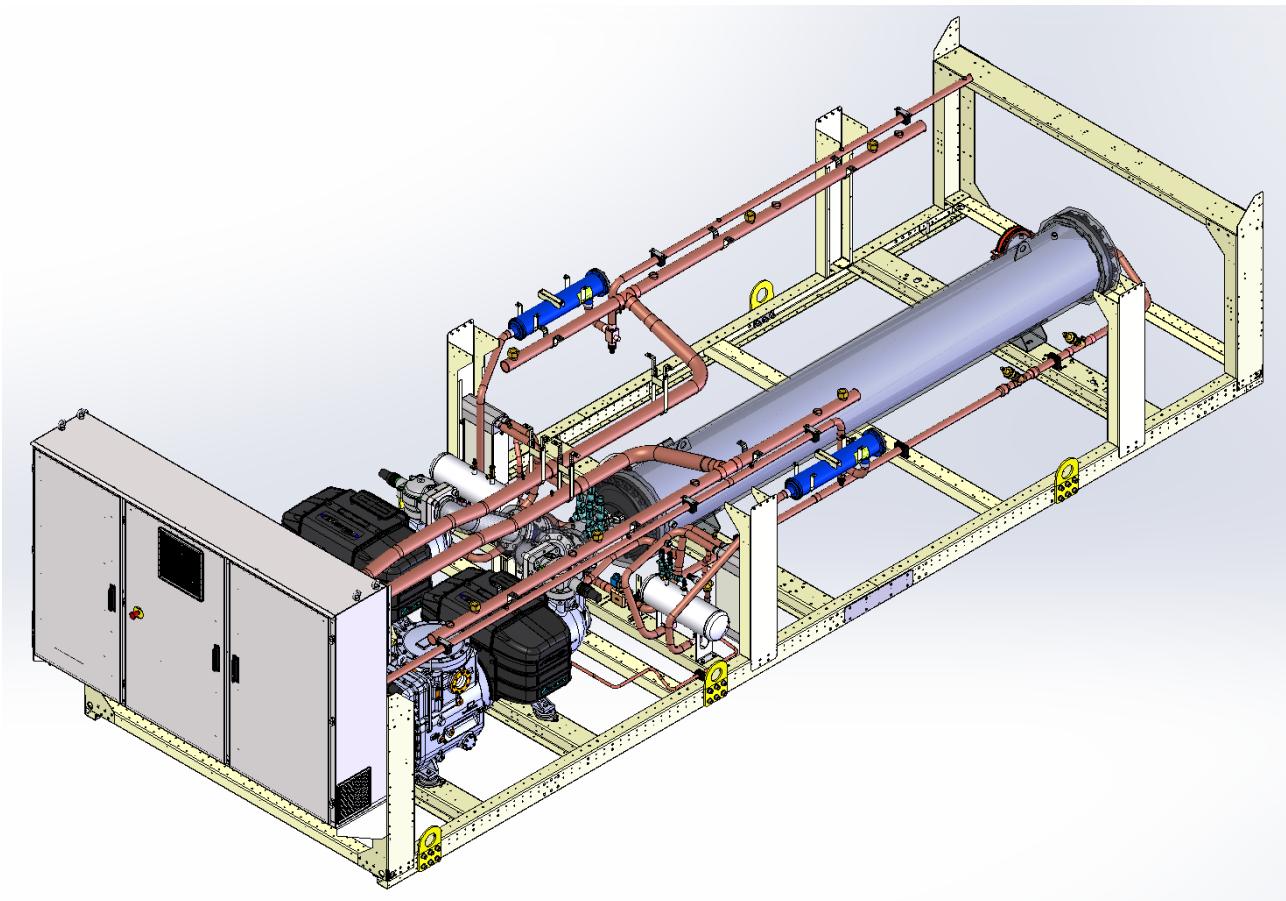

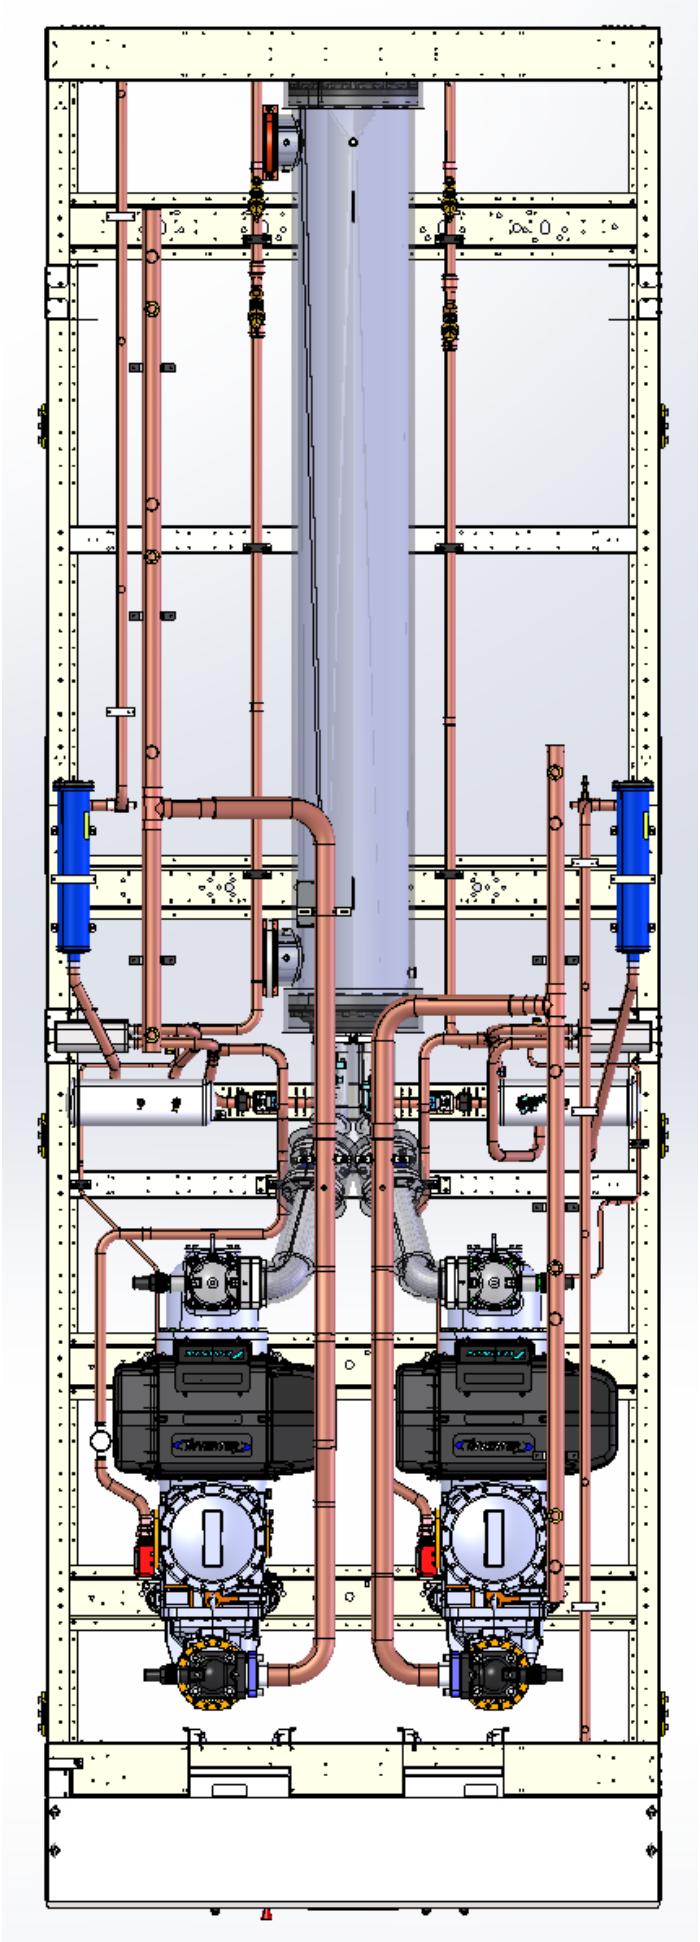

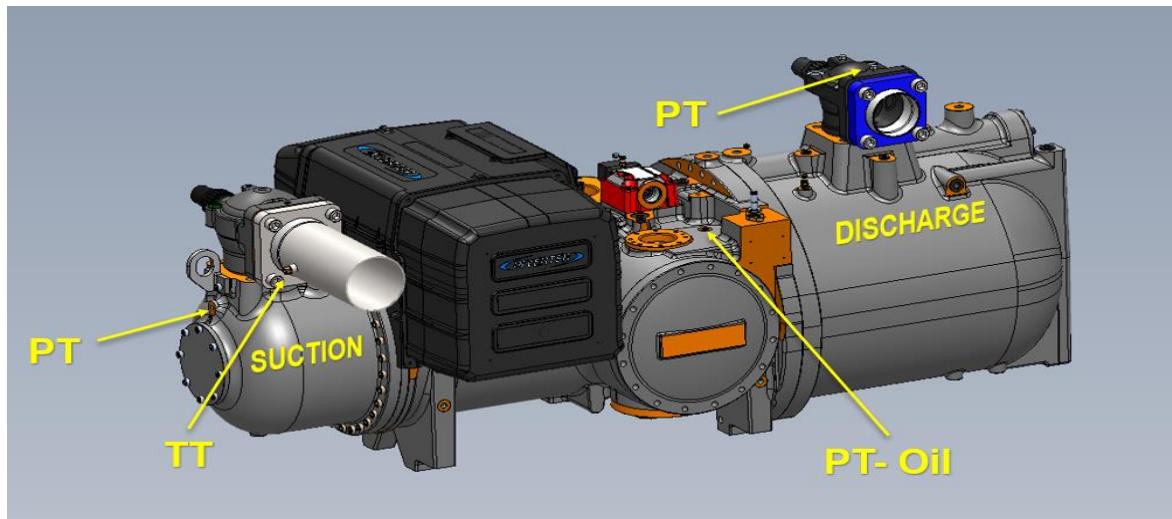


Figure 1 F4AL Compressor

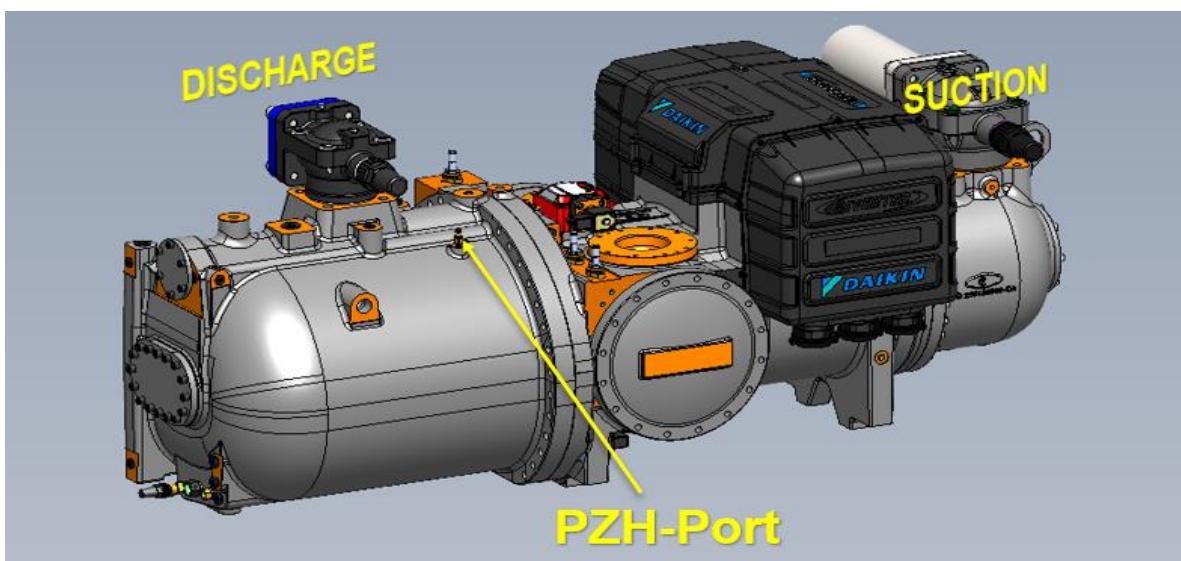


Figure 2 F4AL Compressor

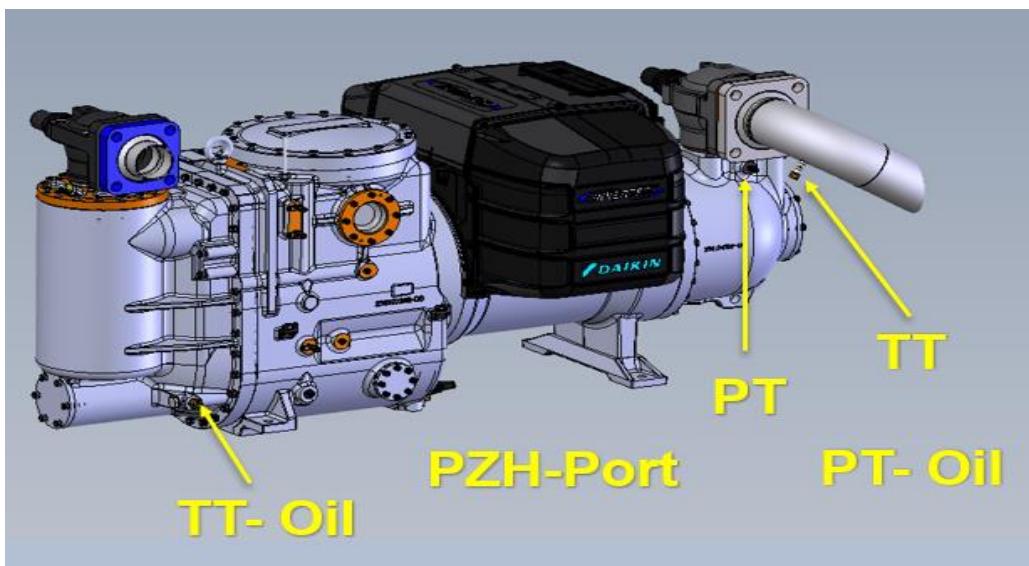


Figure 3 310240 Compressor



Sensor positioning is identical for all compressor models.

Unit Configuration for EWAH TZC Gold (XS, XR)

Daikin Model	Compressor	Motor	Inverter	Inverter Type	FANS TYPE ST	FANS TYPE XN	FANS TYPE OP.142 (HA)	FANS TYPE OP.160 (100Pa)	FANS TYPE OP.161 (200Pa)	Fan C1	Fan C2	EXV	Eco EXV	EXV OP.187 (Alta Temperatura Acqua)
EWAH670TZX-C2	310240L VR 2.6 – 60 Hz	AC	AC 200 kW	DAE	AC900L	AC900L	EC900	EC900	EC1400	6	8	ETS 250	Sporlan	ETS 400
EWAH780TZX-C2	310240L VR 2.6 – 70 Hz	AC	AC 200 kW	DAE	AC900L	AC900L	EC900	EC900	EC1400	8	8	ETS 250	Sporlan	ETS 400
EWAH840TZX-C2	310240L VR 2.6 – 75 Hz	AC	AC 200 kW	DAE	AC900L	AC900L	EC900	EC900	EC1400	8	10	ETS 250	Sporlan	ETS 400
EWAH950TZX-C2	310240L VR 2.6 – 85 Hz	AC	AC 200 kW	DAE	AC900L	AC900L	EC900	EC900	EC1400	10	12	ETS 250	Sporlan	ETS 400
EWAHC10TZX-C2	310240L VR 2.6 – 90 Hz	AC	AC 200 kW	DAE	AC900L	AC900L	EC900	EC900	EC1400	12	12	ETS 250	Sporlan	ETS 400
EWAHC11TZX-C2	310240L VR 2.6 – 100 Hz	AC	AC 200 kW	DAE	AC900L	AC900L	EC900	EC900	EC1400	12	14	ETS 250	Sporlan	ETS 400
EWAHC12TZX-C2	F4ALVVR 60 Hz	AC	AC 200 kW	DAE	AC900	AC900L	EC900	EC900	EC1400	12	12	ETS 400	Sporlan	ETS 400
EWAHC13TZX-C2	F4ALVVR 65 Hz	AC	AC 330 kW	DAE	AC900	AC900L	EC900	EC900	EC1400	12	14	ETS 400	Sporlan	ETS 400
EWAHC14TZX-C2	F4ALVVR 70 Hz	AC	AC 330 kW	DAE	AC900	AC900L	EC900	EC900	EC1400	14	14	ETS 400	Sporlan	ETS 400
EWAHC15TZX-C2	F4ALVVR 75 Hz	AC	AC 330 kW	DAE	AC900	AC900L	EC900	EC900	EC1400	14	16	ETS 400	Sporlan	ETS 400

Unit Configuration for EWAH TZC Gold (XS, XR) New



New fans and compressors models are introduced in this configuration.

The new fans have been introduced for units manufactured since 13/06/2022

The new compressors have been introduced for units manufactured since 20/01/2022

NOMENCLATURA DAIKIN	COMPRESSEORE	Motor	INVERTER	Inverter Type	FANS TYPE XS - XL	FANS TYPE XR	FANS TYPE OP.142 (HA) 50/60 Hz	FANS TYPE OP.160 (100Pa)	FANS TYPE OP.161 (200Pa)	Fan Opt.158/159 XS	Fan Opt.158/159 XR	Fan C1	Fan C2	Eco EXV
EWAH670TZX-C2	310240L VR 2.6 – 60 Hz	AC	AC 200 kW	DAE	(AC900L)	(AC900L)	(EC900)	(EC900)	(EC1400)	KEMBRS-800	KEMBRS-800	6	8	Sporlan
EWAH780TZX-C2	310240L VR 2.6 – 70 Hz	AC	AC 200 kW	DAE	(AC900L)	(AC900L)	(EC900)	(EC900)	(EC1400)	KEMBRS-800	KEMBRS-800	8	8	Sporlan
EWAH840TZX-C2	310240L VR 2.6 – 75 Hz	AC	AC 200 kW	DAE	(AC900L)	(AC900L)	(EC900)	(EC900)	(EC1400)	KEMBRS-800	KEMBRS-800	8	10	Sporlan
EWAH950TZX-C2	310240L VR 2.6 – 85 Hz	AC	AC 200 kW	DAE	(AC900L)	(AC900L)	(EC900)	(EC900)	(EC1400)	KEMBRS-800	KEMBRS-800	10	12	Sporlan
EWAHC10TZX-C2	310240L VR 2.6 – 90 Hz	AC	AC 200 kW	DAE	(AC900L)	(AC900L)	(EC900)	(EC900)	(EC1400)	KEMBRS-800	KEMBRS-800	12	12	Sporlan
EWAHC11TZX-C2	310240L VR 2.6 – 100 Hz	AC	AC 200 kW	DAE	(AC900L)	(AC900L)	(EC900)	(EC900)	(EC1400)	KEMBRS-800	KEMBRS-800	12	14	Sporlan
EWAHC12TZX-C2	F4ALVVR – 60 Hz	AC	AC 200 kW	DAE	(AC900)	(AC900L)	(EC900)	(EC900)	(EC1400)	KEMBRS-1050	KEMBRS-800	12	12	Sporlan
EWAHC13TZX-C2	F4ALVVR – 65 Hz	AC	AC 330 kW	DAE	(AC900)	(AC900L)	(EC900)	(EC900)	(EC1400)	KEMBRS-1050	KEMBRS-800	12	14	Sporlan
EWAHC14TZX-C2	F4ALVVR – 70 Hz	AC	AC 330 kW	DAE	(AC900)	(AC900L)	(EC900)	(EC900)	(EC1400)	KEMBRS-1050	KEMBRS-800	14	14	Sporlan
EWAHC15TZX-C2	F4ALVVR – 75 Hz	AC	AC 330 kW	DAE	(AC900)	(AC900L)	(EC900)	(EC900)	(EC1400)	KEMBRS-1050	KEMBRS-800	14	16	Sporlan

9.2.2 EWAD MZ-C

Unit Configuration for EWAD MZC Silver (SS)

NOMENCLATURA DAIKIN	COMPRESSORE	Motor	INVERTER	Inverter Type	FANS TYPE 50/60 Hz	FANS TYPE OP.142 HA 50/60 Hz	FANS TYPE OP.160 (100Pa)	FANS TYPE OP.161 (200Pa)	Fan Opt. 158/159	OP.260 BOOST COMP	Fan C1	Fan C2	Eco EXV
EWADH10MZSC2	310240L VR 2.6 – 80 Hz	AC	AC 200 kW	DAE	(AC900)	(AC900)	(EC900)	(EC1400)	(DC1000L)	NA	10	12	Sporlan
EWADC11MZSC2	310240L VR 2.6 – 85 Hz	AC	AC 200 kW	DAE	(AC900)	(AC900)	(EC900)	(EC1400)	(DC1000L)	NA	10	12	Sporlan
EWADH11MZSC2	310240L VR 2.6 – 90 Hz	AC	AC 200 kW	DAE	(AC900)	(AC900)	(EC900)	(EC1400)	(DC1000L)	NA	12	12	Sporlan
EWADC13MZSC2	F4ALVVR – 55 Hz	AC	AC 330 kW	DAE	(AC900)	(AC900)	(EC900)	(EC1400)	(DC1000L)	60 Hz	12	12	Sporlan
EWADC14MZSC2	F4ALVVR – 60 Hz	AC	AC 330 kW	DAE	(AC900)	(AC900)	(EC900)	(EC1400)	(DC1000L)	NA	12	14	Sporlan
EWADC15MZSC2	F4ALVVR – 65 Hz	AC	AC 400 kW	DAE	(AC900)	(AC900)	(EC900)	(EC1400)	(DC1000L)	70 Hz	14	14	Sporlan
EWADC16MZSC2	F4ALVVR – 70 Hz	AC	AC 400 kW	DAE	(AC900)	(AC900)	(EC900)	(EC1400)	(DC1000L)	NA	14	16	Sporlan

Unit Configuration for EWAD MZC Silver (SS) New



New fans and compressors models are introduced in this configuration.

The new fans have been introduced for units manufactured since 13/06/2022

The new compressors have been introduced for units manufactured since 20/01/2022

NOMENCLATURA DAIKIN	COMPRESSORE	Motor	INVERTER	Inverter Type	FANS TYPE 50/60 Hz	FANS TYPE OP.142 HA 50/60 Hz	FANS TYPE OP.160 (100Pa)	FANS TYPE OP.161 (200Pa)	Fan Opt. 158/159	OP.260 BOOST COMP	Fan C1	Fan C2	Eco EXV
EWADH10MZSC2	310240L VR 2.6 – 80 Hz	AC	AC 200 kW	DAE	(AC900)	(AC900)	(EC900)	(EC1400)	KEMBRS-1050	NA	10	12	Sporlan
EWADC11MZSC2	310240L VR 2.6 – 85 Hz	AC	AC 200 kW	DAE	(AC900)	(AC900)	(EC900)	(EC1400)	KEMBRS-1050	NA	10	12	Sporlan
EWADH11MZSC2	310240L VR 2.6 – 90 Hz	AC	AC 200 kW	DAE	(AC900)	(AC900)	(EC900)	(EC1400)	KEMBRS-1050	NA	12	12	Sporlan
EWADC13MZSC2	F4ALVVR – 55 Hz	AC	AC 330 kW	DAE	(AC900)	(AC900)	(EC900)	(EC1400)	KEMBRS-1050	60 Hz	12	12	Sporlan
EWADC14MZSC2	F4ALVVR – 60 Hz	AC	AC 330 kW	DAE	(AC900)	(AC900)	(EC900)	(EC1400)	KEMBRS-1050	NA	12	14	Sporlan
EWADC15MZSC2	F4ALVVR – 65 Hz	AC	AC 400 kW	DAE	(AC900)	(AC900)	(EC900)	(EC1400)	KEMBRS-1050	70 Hz	14	14	Sporlan
EWADC16MZSC2	F4ALVVR – 70 Hz	AC	AC 400 kW	DAE	(AC900)	(AC900)	(EC900)	(EC1400)	KEMBRS-1050	NA	14	16	Sporlan

Unit Configuration for EWAD MZC Gold (XS)

Daikin model	Compressor	Motor	Inverter	Inverter Type	FANS TYPE	FANS TYPE OP.142 (HA)	FANS TYPE OP.160 (100Pa)	FANS TYPE OP.161 (200Pa)	Fan C1	Fan C2	EXV	Eco EXV	EXV OP.187 (Alta Temperatura Acqua)
EWADC10MZXSC2	310240L VR 2.6 – 75 Hz	AC	AC 200 kW	DAE	AC900	AC900	EC900	EC1400	10	12	ETS 250	Sporlan	ETS 400
EWADH10MZXSC2	310240L VR 2.6 – 80 Hz	AC	AC 200 kW	DAE	AC900	AC900	EC900	EC1400	12	12	ETS 250	Sporlan	ETS 400
EWADH11MZXSC2	310240L VR 2.6 – 85 Hz	AC	AC 200 kW	DAE	AC900	AC900	EC900	EC1400	12	14	ETS 250	Sporlan	ETS 400
EWADC12MZXSC2	F4AL VVR 50 Hz	AC	AC 330 kW	DAE	AC900	AC900	EC900	EC1400	12	12	ETS 400	Sporlan	ETS 400
EWADC13MZXSC2	F4AL VVR 55 Hz	AC	AC 330 kW	DAE	AC900	AC900	EC900	EC1400	12	14	ETS 400	Sporlan	ETS 400
EWADC14MZXSC2	F4AL VVR 60 Hz	AC	AC 330 kW	DAE	AC900	AC900	EC900	EC1400	14	14	ETS 400	Sporlan	ETS 400
EWADC15MZXSC2	F4AL VVR 65 Hz	AC	AC 400 kW	DAE	AC900	AC900	EC900	EC1400	14	16	ETS 400	Sporlan	ETS 400

Unit Configuration for EWAD MZC Gold (XS) New



New fans and compressors models are introduced in this configuration.

The new fans have been introduced for units manufactured since 13/06/2022

The new compressors have been introduced for units manufactured since 20/01/2022

NOMENCLATURA DAIKIN	COMPRESSORE	MOTOR	INVERTER	Inverter Type	FANS TYPE 50/60 Hz	FANS TYPE OP. 142 (HA) 50/60 Hz	FANS TYPE OP.160 (100Pa)	FANS TYPE OP.161 (200Pa)	Fan C1	Fan C2	Eco EXV
EWADC10MZSC2	310240L VR 2.6 – 75 Hz	AC	AC 200 kW	DAE	(AC900)	(AC900)	(EC900)	(EC1400)	10	12	Sporlan
EWADH10MZSC2	310240L VR 2.6 – 80 Hz	AC	AC 200 kW	DAE	(AC900)	(AC900)	(EC900)	(EC1400)	12	12	Sporlan
EWADH11MZSC2	310240L VR 2.6 – 85 Hz	AC	AC 200 kW	DAE	(AC900)	(AC900)	(EC900)	(EC1400)	12	14	Sporlan
EWADC12MZSC2	F4ALVVR – 50 Hz	AC	AC 330 kW	DAE	(AC900)	(AC900)	(EC900)	(EC1400)	12	12	Sporlan
EWADC13MZSC2	F4ALVVR – 55 Hz	AC	AC 330 kW	DAE	(AC900)	(AC900)	(EC900)	(EC1400)	12	14	Sporlan
EWADC14MZSC2	F4ALVVR – 60 Hz	AC	AC 330 kW	DAE	(AC900)	(AC900)	(EC900)	(EC1400)	14	14	Sporlan
EWADC15MZSC2	F4ALVVR – 65 Hz	AC	AC 400 kW	DAE	(AC900)	(AC900)	(EC900)	(EC1400)	14	16	Sporlan

Unit Configuration for EWAD MZC Platinum (PS)

DaiKin Model	Compressor	Motor	Inverter	Inverter Type	FANS TYPE	FANS TYPE OP.142 (HA)	FANS TYPE OP.160 (100Pa)	FANS TYPE OP.161 (200Pa)	Fan C1	Fan C2	EXV	Eco EXV	EXV OP.187 (Alta Temperatur Acqua)
EWADC10MZPSC2	310240L VR 2.6 – 75 Hz	AC	AC 200 kW	DAE	EC900	EC900	EC900	EC1400	10	12	ETS 250	<u>Sporlan</u>	ETS 400
EWADH10MZPSC2	310240L VR 2.6 – 80 Hz	AC	AC 200 kW	DAE	EC900	EC900	EC900	EC1400	12	12	ETS 250	<u>Sporlan</u>	ETS 400
EWADH11MZPSC2	310240L VR 2.6 – 85 Hz	AC	AC 200 kW	DAE	EC900	EC900	EC900	EC1400	12	14	ETS 250	<u>Sporlan</u>	ETS 400
EWADC12MZPSC2	F4AL VVR 50 Hz	AC	AC 330 kW	DAE	EC900	EC900	EC900	EC1400	12	12	ETS 400	<u>Sporlan</u>	ETS 400
EWADC13MZPSC2	F4AL VVR 55 Hz	AC	AC 330 kW	DAE	EC900	EC900	EC900	EC1400	12	14	ETS 400	<u>Sporlan</u>	ETS 400
EWADC14MZPSC2	F4AL VVR 60 Hz	AC	AC 330 kW	DAE	EC900	EC900	EC900	EC1400	14	14	ETS 400	<u>Sporlan</u>	ETS 400
EWADC15MZPSC2	F4AL VVR 65 Hz	AC	AC 400 kW	DAE	EC900	EC900	EC900	EC1400	14	16	ETS 400	<u>Sporlan</u>	ETS 400

Unit Configuration for EWAD MZC Platinum (PS) New



New fans and compressors models are introduced in this configuration.

The new fans have been introduced for units manufactured since 13/06/2022

The new compressors have been introduced for units manufactured since 20/01/2022

NOMENCLATURA DAIKIN	Compressor	Motor	Inverter	Inverter Type	FANS TYPE	FANS TYPE OP.142 HA	FANS TYPE OP.160 (100Pa)	FANS TYPE OP.161 (200Pa)	Fan Opt. 158/159	OP.260 BOOST COMP	Fan C1	Fan C2	Eco EXV
EWADC10MZPSC2	310240L VR 2.6 – 75 Hz	AC	AC 200 kW	DAE	KEMBRS-1050	KEMBRS-1050	(EC900)	(EC1400)	STD	NA	10	12	Sporlan
EWADH10MZPSC2	310240L VR 2.6 – 80 Hz	AC	AC 200 kW	DAE	KEMBRS-1050	KEMBRS-1050	(EC900)	(EC1400)	STD	NA	12	12	Sporlan
EWADH11MZPSC2	310240L VR 2.6 – 85 Hz	AC	AC 200 kW	DAE	KEMBRS-1050	KEMBRS-1050	(EC900)	(EC1400)	STD	NA	12	14	Sporlan
EWADC12MZPSC2	F4ALVVR – 50 Hz	AC	AC 330 kW	DAE	KEMBRS-1050	KEMBRS-1050	(EC900)	(EC1400)	STD	NA	12	12	Sporlan
EWADC13MZPSC2	F4ALVVR – 55 Hz	AC	AC 330 kW	DAE	KEMBRS-1050	KEMBRS-1050	(EC900)	(EC1400)	STD	NA	12	14	Sporlan
EWADC14MZPSC2	F4ALVVR – 60 Hz	AC	AC 330 kW	DAE	KEMBRS-1050	KEMBRS-1050	(EC900)	(EC1400)	STD	NA	14	14	Sporlan
EWADC15MZPSC2	F4ALVVR – 65 Hz	AC	AC 400 kW	DAE	KEMBRS-1050	KEMBRS-1050	(EC900)	(EC1400)	STD	NA	14	16	Sporlan

9.2.3 EWAD TZ-B and EWAH TZ-B

Unit Configuration for EWAD TZB Silver (SS, SR, SL) From 160 to 700 size

Modello Daikin	Modello McQuay	Compressore	Inv	Fan 50Hz	Fan 60 Hz	Fan Brine 50/60 Hz	Fan HA 50/60 Hz	OP. 158/159 Fan BRS	Opt.160 SS-SL-SR 50/60 Hz	Fan Opt.161 SS-SL-SR 50/60 Hz	EXV	FanC1	FanC2
EWAD160TZS B1	ATS 050.1 B SE	3120-60Hz-AC	90	AC700	AC900	AC900L	AC900	DC1000-700	AC900	EC1400	ETS100	4	-
EWAD190TZS B1	ATS 060.1 B SE	3120-70Hz-AC	90	AC700	AC900	AC900L	AC900	DC1000-700	AC900	EC1400	ETS100	4	-
EWAD240TZS B1	ATS 070.1 B SE	3122-60Hz-AC	90	AC700	AC900	AC900L	AC900	DC1000-700	AC900	EC1400	ETS250	4	-
EWAD270TZS B1	ATS 080.1 B SE	3122-70Hz-AC	90	AC700	AC900	AC900L	AC900	DC1000-700	AC900	EC1400	ETS250	6	-
EWAD300TZS B1	ATS 090.1 B SE	3122-80Hz-AC	120	AC700	AC900	AC900L	AC900	DC1000-700	AC900	EC1400	ETS250	6	-
EWAD360TZS B1	ATS 100.1 B SE	3122-90Hz-AC	120	AC700	AC900	AC900L	AC900	DC1000-700	AC900	EC1400	ETS250	8	-
EWAD380TZS B2	ATS 120.2 B SE	3120-70Hz-AC	90	AC700	AC900	AC900L	AC900	DC1000-700	AC900	EC1400	ETS100	4	4
EWAD450TZS B2	ATS 130.2 B SE	3122-60Hz-AC	90	AC700	AC900	AC900L	AC900	DC1000-700	AC900	EC1400	ETS250	4	4
EWAD495TZS B2	ATS 150.2 B SE	3122-65Hz-AC	90	AC700	AC900	AC900L	AC900	DC1000-700	AC900	EC1400	ETS250	4	6
EWAD570TZS B2	ATS 170.2 B SE	3122-75Hz-AC	120	AC700	AC900	AC900L	AC900	DC1000-700	AC900	EC1400	ETS250	6	6
EWAD610TZS B2	ATS 180.2 B SE	3122-80Hz-AC	120	AC700	AC900	AC900L	AC900	DC1000-700	AC900	EC1400	ETS250	6	6
EWAD660TZS B2	ATS 200.2 B SE	3122-85Hz-AC	120	AC700	AC900	AC900L	AC900	DC1000-700	AC900	EC1400	ETS250	6	6
EWAD700TZS B2	ATS 210.2 B SE	3122-90Hz-AC	120	AC700	AC900	AC900L	AC900	DC1000-700	AC900	EC1400	ETS250	6	8

Unit Configuration for EWAD TZB Silver (SS, SR, SL) From 160 to 700 size New



New fans and compressors models are introduced in this configuration.

The new fans have been introduced for units manufactured since 13/06/2022

The new compressors have been introduced for units manufactured since 20/01/2022

Modello Daikin	Modello McQuay	Compressore	Inv	Fan 50Hz	Fan 60 Hz	Fan Brine 50/60 Hz	Fan HA 50/60 Hz	OP. 158/159 Fan BRS	Opt.160 SS-SL-SR 50/60 Hz	Fan Opt.161 SS-SL-SR 50/60 Hz	EXV	FanC1	FanC2
EWAD160TZS B1	ATS 050.1 B SE	3120-60Hz-AC	90	AC700	AC900	AC900L	AC900	KEMBRS-800	AC900	EC1400	ETS100	4	-
EWAD190TZS B1	ATS 060.1 B SE	3120-70Hz-AC	90	AC700	AC900	AC900L	AC900	KEMBRS-800	AC900	EC1400	ETS100	4	-
EWAD240TZS B1	ATS 070.1 B SE	3122-60Hz-AC	90	AC700	AC900	AC900L	AC900	KEMBRS-800	AC900	EC1400	ETS250	4	-
EWAD270TZS B1	ATS 080.1 B SE	3122-70Hz-AC	90	AC700	AC900	AC900L	AC900	KEMBRS-800	AC900	EC1400	ETS250	6	-
EWAD300TZS B1	ATS 090.1 B SE	3122-80Hz-AC	120	AC700	AC900	AC900L	AC900	KEMBRS-800	AC900	EC1400	ETS250	6	-
EWAD360TZS B1	ATS 100.1 B SE	3122-90Hz-AC	120	AC700	AC900	AC900L	AC900	KEMBRS-800	AC900	EC1400	ETS250	8	-
EWAD380TZS B2	ATS 120.2 B SE	3120-70Hz-AC	90	AC700	AC900	AC900L	AC900	KEMBRS-800	AC900	EC1400	ETS100	4	4
EWAD455TZS B2	ATS 130.2 B SE	3122-60Hz-AC	90	AC700	AC900	AC900L	AC900	KEMBRS-800	AC900	EC1400	ETS250	4	4
EWAD500TZS B2	ATS 150.2 B SE	3122-65Hz-AC	90	AC700	AC900	AC900L	AC900	KEMBRS-800	AC900	EC1400	ETS250	4	6
EWAD570TZS B2	ATS 170.2 B SE	3122-75Hz-AC	120	AC700	AC900	AC900L	AC900	KEMBRS-800	AC900	EC1400	ETS250	6	6
EWAD610TZS B2	ATS 180.2 B SE	3122-80Hz-AC	120	AC700	AC900	AC900L	AC900	KEMBRS-800	AC900	EC1400	ETS250	6	6
EWAD660TZS B2	ATS 200.2 B SE	3122-85Hz-AC	120	AC700	AC900	AC900L	AC900	KEMBRS-800	AC900	EC1400	ETS250	6	6
EWAD700TZS B2	ATS 210.2 B SE	3122-90Hz-AC	120	AC700	AC900	AC900L	AC900	KEMBRS-800	AC900	EC1400	ETS250	6	8

Unit Configuration for EWAD TZB Silver (SS, SL) From 820 to C11 size

Modello Daikin	Modello McQuay	Compressor	Inv	Fan 50/60 Hz	Fan Brine 50/60Hz	Fan HA 50/60 Hz	OP. 158/159 Fan BRS	Fan Opt.160 SS-SL 50/60 Hz	Fan Opt.161 SS-SL 50/60 Hz	EXV	FanC1	FanC2
EWAD820Tzs B2	ATS 230.2 B SE	F3AS-70Hz-AC	200kW	AC900	AC900	AC900	DC1000L	EC900	EC1400	ETS250	6	8
EWAD900Tzs B2	ATS 260.2 B SE	F3AL-70Hz-AC	200kW	AC900	AC900	AC900	DC1000L	EC900	EC1400	ETS250	6	8
EWAD990Tzs B2	ATS 280.2 B SE	F3AL-75Hz-AC	200kW	AC900	AC900	AC900	DC1000L	EC900	EC1400	ETS250	8	8
EWADC10Tzs B2	ATS 290.2 B SE	F3AL-80Hz-AC	200kW	AC900	AC900	AC900	DC1000L	EC900	EC1400	ETS250	8	10
EWADC11Tzs B2	ATS 310.2 B SE	F3AL-85Hz-AC	200kW	AC900	AC900	AC900	DC1000L	EC900	EC1400	ETS250	10	10

Unit Configuration for EWAD TZB Silver (SS, SL) From 820 to C11 size New



New fans and compressors models are introduced in this configuration.

The new fans have been introduced for units manufactured since 13/06/2022

The new compressors have been introduced for units manufactured since 20/01/2022

Modello Daikin	Modello McQuay	Compressor	Inv	Fan 50/60 Hz	Fan Brine 50/60Hz	Fan HA 50/60 Hz	OP. 158/159 Fan BRS	Fan Opt.160 SS-SL 50/60 Hz	Fan Opt.161 SS-SL 50/60 Hz	EXV	FanC1	FanC2
EWAD820Tzs B2	ATS 230.2 B SE	F3AS-70Hz-AC	200kW	AC900	AC900	AC900	KEMBRS-1050	EC900	EC1400	ETS250	6	8
EWAD900Tzs B2	ATS 260.2 B SE	F3AL-70Hz-AC	200kW	AC900	AC900	AC900	KEMBRS-1050	EC900	EC1400	ETS250	6	8
EWAD990Tzs B2	ATS 280.2 B SE	F3AL-75Hz-AC	200kW	AC900	AC900	AC900	KEMBRS-1050	EC900	EC1400	ETS250	8	8
EWADC10Tzs B2	ATS 290.2 B SE	F3AL-80Hz-AC	200kW	AC900	AC900	AC900	KEMBRS-1050	EC900	EC1400	ETS250	8	10
EWADC11Tzs B2	ATS 310.2 B SE	F3AL-85Hz-AC	200kW	AC900	AC900	AC900	KEMBRS-1050	EC900	EC1400	ETS250	10	10

Unit Configuration for EWAD TZB Silver (SR) From 820 to C11 size

Modello Daikin	Modello McQuay	Compressore	Inverter	Fan50Hz	Fan60Hz	Fan Brine 50/60 Hz	Fan HA 50/60 Hz	OP. 158/159 Fan BRS	Fan Opt.160 50/60 Hz	Fan Opt.161 50/60 Hz	EXV	FanC1	FanC2
EWAD820TZSRB2	ATS 230.2 B SE	F3AS-70Hz-AC	200kW	AC700	AC900	AC900L	AC900	DC1000-700	AC900	EC1400	ETS250	8	8
EWAD900TZSRB2	ATS 260.2 B SE	F3AL-70Hz-AC	200kW	AC700	AC900	AC900L	AC900	DC1000-700	AC900	EC1400	ETS250	8	8
EWAD990TZSRB2	ATS 280.2 B SE	F3AL-75Hz-AC	200kW	AC700	AC900	AC900L	AC900	DC1000-700	AC900	EC1400	ETS250	8	10
EWADC10TZSRB2	ATS 290.2 B SE	F3AL-80Hz-AC	200kW	AC700	AC900	AC900L	AC900	DC1000-700	AC900	EC1400	ETS250	10	10
EWADC11TZSRB2	ATS 310.2 B SE	F3AL-85Hz-AC	200kW	AC700	AC900	AC900L	AC900	DC1000-700	AC900	EC1400	ETS250	10	12

Unit Configuration for EWAD TZB Silver (SR) From 820 to C11 size New



New fans and compressors models are introduced in this configuration.

The new fans have been introduced for units manufactured since 13/06/2022

The new compressors have been introduced for units manufactured since 20/01/2022

Modello Daikin	Modello McQuay	Compressore	Inverter	Fan50Hz	Fan60Hz	Fan Brine 50/60 Hz	Fan HA 50/60 Hz	OP. 158/159 Fan BRS	Fan Opt.160 50/60 Hz	Fan Opt.161 50/60 Hz	EXV	FanC1	FanC2
EWAD820TZSRB2	ATS 230.2 B SE	310240S - 65Hz AC	200kW	AC700	AC900	AC900L	AC900	KEMBRS-800	AC900	EC1400	ETS250	8	8
EWAD900TZSRB2	ATS 260.2 B SE	310240L - 60Hz AC	200kW	AC700	AC900	AC900L	AC900	KEMBRS-800	AC900	EC1400	ETS250	8	8
EWAD990TZSRB2	ATS 280.2 B SE	310240L - 63Hz AC	200kW	AC700	AC900	AC900L	AC900	KEMBRS-800	AC900	EC1400	ETS250	8	10
EWADC10TZSRB2	ATS 290.2 B SE	310240L - 67Hz AC	200kW	AC700	AC900	AC900L	AC900	KEMBRS-800	AC900	EC1400	ETS250	10	10
EWADC11TZSRB2	ATS 310.2 B SE	310240L - 70Hz AC	200kW	AC700	AC900	AC900L	AC900	KEMBRS-800	AC900	EC1400	ETS250	10	12

Unit Configuration for EWAD TZB Platinum (PS, PR, PL)

Modello Daikin	Modello McQuay	Compressore	Inverter	Fan 50/60 Hz	Fan Brine 50/60 Hz	Fan HA 50/60 Hz	OP. 158/159 Fan BRS	Fan Opt.160 50/60 Hz	Fan Opt.161 50/60 Hz	EXV	FanC1	FanC2
EWAD190TZP B1	ATS 050.1 B PR	3120-60Hz-DC	90kW	DC1000-700	DC1000-700	DC1000L	STD	EC900	EC1400	ETS100	8	-
EWAD220TZP B1	ATS 060.1 B PR	3120-70Hz-DC	90kW	DC1000-700	DC1000-700	DC1000L	STD	EC900	EC1400	ETS100	8	-
EWAD240TZP B1	ATS 070.1 B PR	3122-60Hz-DC	120kW	DC1000-700	DC1000-700	DC1000L	STD	EC900	EC1400	ETS250	8	-
EWAD290TZP B1	ATS 080.1 B PR	3122-70Hz-DC	120kW	DC1000-700	DC1000-700	DC1000L	STD	EC900	EC1400	ETS250	8	-
EWAD300TZP B1	ATS 090.1 B PR	3122-80Hz-DC	120kW	DC1000-700	DC1000-700	DC1000L	STD	EC900	EC1400	ETS250	10	-
EWAD350TZP B2	ATS 100.2 B PR	3120-60Hz-DC	90kW	DC1000-700	DC1000-700	DC1000L	STD	EC900	EC1400	ETS100	6	6
EWAD420TZP B2	ATS 120.2 B PR	3120-70Hz-DC	90kW	DC1000-700	DC1000-700	DC1000L	STD	EC900	EC1400	ETS100	6	8
EWAD495TZP B2	ATS 140.2 B PR	3122-60Hz-DC	120kW	DC1000-700	DC1000-700	DC1000L	STD	EC900	EC1400	ETS250	8	8
EWAD550TZP B2	ATS 160.2 B PR	3122-65Hz-DC	120kW	DC1000-700	DC1000-700	DC1000L	STD	EC900	EC1400	ETS250	8	10
EWAD620TZP B2	ATS 180.2 B PR	3122-75Hz-DC	120kW	DC1000-700	DC1000-700	DC1000L	STD	EC900	EC1400	ETS250	10	10
EWAD720TZP B2	ATS 210.2 B PR	F3AS-60Hz-DC	200kW	DC1000-700	DC1000-700	DC1000L	STD	EC900	EC1400	ETS250	10	10
EWAD820TZP B2	ATS 230.2 B PR	F3AS-70Hz-DC	200kW	DC1000-700	DC1000-700	DC1000L	STD	EC900	EC1400	ETS250	10	12
EWAD950TZP B2	ATS 270.2 B PR	F3AL-70Hz-DC	200kW	DC1000-700	DC1000-700	DC1000L	STD	EC900	EC1400	ETS250	12	12

Unit Configuration for EWAD TZB Platinum (PS, PR, PL) New



New fans and compressors models are introduced in this configuration.

The new fans have been introduced for units manufactured since 13/06/2022

The new compressors have been introduced for units manufactured since 20/01/2022

Modello Daikin	Modello McQuay	Compressore	Inverter	Fan 50/60 Hz	Fan Brine 50/60 Hz	Fan HA 50/60 Hz	OP. 158/159 Fan BRS	Fan Opt.160 50/60 Hz	Fan Opt.161 50/60 Hz	EXV	FanC1	FanC2
EWAD190TZP B1	ATS 050.1 B PR	3120-60Hz-DC	90kW	KEMBRS-800	KEMBRS-800	KEMBRS-1050	STD	EC900	EC1400	ETS100	8	-
EWAD220TZP B1	ATS 060.1 B PR	3120-70Hz-DC	90kW	KEMBRS-800	KEMBRS-800	KEMBRS-1050	STD	EC900	EC1400	ETS100	8	-
EWAD240TZP B1	ATS 070.1 B PR	3122-60Hz-DC	120kW	KEMBRS-800	KEMBRS-800	KEMBRS-1050	STD	EC900	EC1400	ETS250	8	-
EWAD290TZP B1	ATS 080.1 B PR	3122-70Hz-DC	120kW	KEMBRS-800	KEMBRS-800	KEMBRS-1050	STD	EC900	EC1400	ETS250	8	-
EWAD300TZP B1	ATS 090.1 B PR	3122-80Hz-DC	120kW	KEMBRS-800	KEMBRS-800	KEMBRS-1050	STD	EC900	EC1400	ETS250	10	-
EWAD350TZP B2	ATS 100.2 B PR	3120-60Hz-DC	90kW	KEMBRS-800	KEMBRS-800	KEMBRS-1050	STD	EC900	EC1400	ETS100	6	6
EWAD420TZP B2	ATS 120.2 B PR	3120-70Hz-DC	90kW	KEMBRS-800	KEMBRS-800	KEMBRS-1050	STD	EC900	EC1400	ETS100	6	8
EWAD495TZP B2	ATS 140.2 B PR	3122-60Hz-DC	120kW	KEMBRS-800	KEMBRS-800	KEMBRS-1050	STD	EC900	EC1400	ETS250	8	8
EWAD550TZP B2	ATS 160.2 B PR	3122-65Hz-DC	120kW	KEMBRS-800	KEMBRS-800	KEMBRS-1050	STD	EC900	EC1400	ETS250	8	10
EWAD620TZP B2	ATS 180.2 B PR	3122-75Hz-DC	120kW	KEMBRS-800	KEMBRS-800	KEMBRS-1050	STD	EC900	EC1400	ETS250	10	10
EWAD720TZP B2	ATS 210.2 B PR	310240S-55Hz-DC	200kW	KEMBRS-800	KEMBRS-800	KEMBRS-1050	STD	EC900	EC1400	ETS250	10	10
EWAD820TZP B2	ATS 230.2 B PR	310240S-65Hz-DC	200kW	KEMBRS-800	KEMBRS-800	KEMBRS-1050	STD	EC900	EC1400	ETS250	10	12
EWAD950TZP B2	ATS 270.2 B PR	310240L-60Hz-DC	200kW	KEMBRS-800	KEMBRS-800	KEMBRS-1050	STD	EC900	EC1400	ETS250	12	12

Unit Configuration for EWAH TZB Silver (SS, SR, SL)

Modello Daikin	Comp	Hz	Inverter	Fan C1	Fan C2	Fan	Fan Brine	Fan HA	OP. 158/159 Fan BRS	Fan Opt. 160	Fan Opt. 161
EWAH170TZS-B1	3122 AC	60	90 kW	4	0	AC700	AC900L	AC900	DC1000-700	AC900	EC1400
EWAH200TZS-B1	3122 AC	70	90 kW	4	0	AC700	AC900L	AC900	DC1000-700	AC900	EC1400
EWAH240TZS-B1	3122 AC	85	120 kW	6	0	AC700	AC900L	AC900	DC1000-700	AC900	EC1400
EWAH290TZS-B1	F3AS AC	75	200 kW	6	0	AC700	AC900L	AC900	DC1000-700	AC900	EC1400
EWAH330TZS-B1	F3AL AC	75	200 kW	6	0	AC700	AC900L	AC900	DC1000-700	AC900	EC1400
EWAH390TZS-B2	3122 AC	70	90 kW	4	6	AC700	AC900L	AC900	DC1000-700	AC900	EC1400
EWAH420TZS-B2	3122 AC	75	120 kW	4	6	AC700	AC900L	AC900	DC1000-700	AC900	EC1400
EWAH490TZS-B2	3122 AC	85	120 kW	6	6	AC700	AC900L	AC900	DC1000-700	AC900	EC1400
EWAH530TZS-B2	3122 AC	90	120 kW	6	6	AC700	AC900L	AC900	DC1000-700	AC900	EC1400
EWAH600TZS-B2	F3AS AC	80	200 kW	6	6	AC700	AC900L	AC900	DC1000-700	AC900	EC1400
EWAH690TZS-B2	F3AL AC	80	200 kW	6	8	AC700					
EWAH750TZS-B2	F3AL AC	86	200 kW	8	8	AC700					
EWAH820TZS-B2	F3BL AC	65	330 kW	8	8	AC700					
EWAH920TZS-B2	F3BL AC	75	330 kW	8	10	AC700					
EWAH980TZS-B2	F3BL AC	80	330 kW	10	10	AC700					
EWAHC10TZS-B2	F3BL AC	85	330 kW	10	10	AC700					

Unit Configuration for EWAH TZB Silver (SS, SR, SL) New



New fans and compressors models are introduced in this configuration.

The new fans have been introduced for units manufactured since 13/06/2022

The new compressors have been introduced for units manufactured since 20/01/2022

Modello Daikin	Comp	Hz	Inverter	Fan C1	Fan C2	Fan	Fan Brine	Fan HA	OP. 158/159 Fan BRS	Fan Opt. 160	Fan Opt. 161
EWAH170TZS-B1	3122 AC	60	90 kW	4	0	AC700	AC900L	AC900	DC1000-700	AC900	EC1400
EWAH200TZS-B1	3122 AC	70	90 kW	4	0	AC700	AC900L	AC900	DC1000-700	AC900	EC1400
EWAH240TZS-B1	3122 AC	85	120 kW	6	0	AC700	AC900L	AC900	DC1000-700	AC900	EC1400
EWAH290TZS-B1	310240S AC	69	200 kW	6	0	AC700	AC900L	AC900	DC1000-700	AC900	EC1400
EWAH330TZS-B1	310240L AC	63	200 kW	6	0	AC700	AC900L	AC900	DC1000-700	AC900	EC1400
EWAH390TZS-B2	3122 AC	70	90 kW	4	6	AC700	AC900L	AC900	DC1000-700	AC900	EC1400
EWAH420TZS-B2	3122 AC	75	120 kW	4	6	AC700	AC900L	AC900	DC1000-700	AC900	EC1400
EWAH490TZS-B2	3122 AC	85	120 kW	6	6	AC700	AC900L	AC900	DC1000-700	AC900	EC1400
EWAH530TZS-B2	3122 AC	90	120 kW	6	6	AC700	AC900L	AC900	DC1000-700	AC900	EC1400
EWAH600TZS-B2	310240S AC	73	200 kW	6	6	AC700	AC900L	AC900	DC1000-700	AC900	EC1400
EWAH690TZS-B2	F3AL AC	80	200 kW	6	8	AC700					
EWAH750TZS-B2	F3AL AC	86	200 kW	8	8	AC700					
EWAH820TZS-B2	F3BL AC	65	330 kW	8	8	AC700					
EWAH920TZS-B2	F3BL AC	75	330 kW	8	10	AC700					
EWAH980TZS-B2	F3BL AC	80	330 kW	10	10	AC700					
EWAHC10TZS-B2	F3BL AC	85	330 kW	10	10	AC700					

Unit Configuration for EWAH TZB Platinum (PS, PR, PL) New



New fans and compressors models are introduced in this configuration.

The new fans have been introduced for units manufactured since 13/06/2022

The new compressors have been introduced for units manufactured since 20/01/2022

Modello Daikin	Comp	Hz	Inverter	Fan C1	Fan C2	Fan PS-PL-PR	Fan Brine	Fan HA	OP. 158/159 Fan BRS	Fan Opt. 160	Fan Opt. 161
EWAH370T2P-B2	3122 DC	60	90 kW	8	8	DC1000-700	DC1000-700	DC1000L	STD	EC900	EC1400
EWAH440T2P-B2	3122 DC	70	90 kW	10	10	DC1000-700	DC1000-700	DC1000L	STD	EC900	EC1400
EWAH530T2P-B2	310240S DC	55	200 kW	8	8	DC1000-700	DC1000-700	DC1000L	STD	EC900	EC1400
EWAH610T2P-B2	310240S DC	65	200 kW	8	10	DC1000-700	DC1000-700	DC1000L	STD	EC900	EC1400
EWAH690T2P-B2	F3AL DC	70	200 kW	10	12	DC1000-700					
EWAH770T2P-B2	F3BL DC	55	330 kW	12	12	DC1000-700					

9.2.4 EWAD MZ-B

Unit Configuration for EWAD MZB Silver (SS)

Modello Daikin	Compressore	Opt. 260 Boost Comp	Inverter	Fan 50/60Hz	Fan Brine 50/60Hz	Fan HA 50/60 Hz	Fan Opt. 158	EXV	FanC1	FanC2
EWAD380MZ-SS B2	3120-70Hz-AC	NA	90kW	AC900	AC900	AC900	DC1000L	ETS100	4	4
EWAD450MZ-SS B2	3122-60Hz-AC	NA	90kW	AC900	AC900	AC900	DC1000L	ETS250	4	4
EWAD495MZ-SS B2	3122-65Hz-AC	NA	90kW	AC900	AC900	AC900	DC1000L	ETS250	4	6
EWAD570MZ-SS B2	3122-75Hz-AC	90 Hz	120kW	AC900	AC900	AC900	DC1000L	ETS250	6	6
EWAD610MZ-SS B2	3122-80Hz-AC	NA	120kW	AC900	AC900	AC900	DC1000L	ETS250	6	6
EWAD660MZ-SS B2	3122-85Hz-AC	NA	120kW	AC900	AC900	AC900	DC1000L	ETS250	6	6
EWAD700MZ-SS B2	3122-90Hz-AC	NA	120kW	AC900	AC900	AC900	DC1000L	ETS250	6	8
EWAD820MZ-SS B2	F3AS-70Hz-AC	80 Hz	200kW	AC900	AC900	AC900	DC1000L	ETS250	6	8
EWAD900MZ-SS B2	F3AL-70Hz-AC	NA	200kW	AC900	AC900	AC900	DC1000L	ETS250	6	8
EWADC10MZ-SS B2	F3AL-75Hz-AC	NA	200kW	AC900	AC900	AC900	DC1000L	ETS250	8	8
EWADH10MZ-SS B2	F3AL-75Hz-AC	85 Hz	200kW	AC900	AC900	AC900	DC1000L	ETS250	8	10
EWADH11MZ-SS B2	F3AL-85Hz-AC	NA	200kW	AC900	AC900	AC900	DC1000L	ETS250	10	12

Unit Configuration for EWAD MZB Silver (SS) New



New fans and compressors models are introduced in this configuration.

The new fans have been introduced for units manufactured since 13/06/2022

The new compressors have been introduced for units manufactured since 20/01/2022

Modello Daikin	Compressore	Opt. 260 Boost Comp	Inverter	Fan 50/60Hz	Fan Brine 50/60Hz	Fan HA 50/60 Hz	Fan Opt. 158	EXV	FanC1	FanC2
EWAD380MZ-SS B2	3120-70Hz-AC	NA	90kW	AC900	AC900	AC900	KEMBRS-1050	ETS100	4	4
EWAD450MZ-SS B2	3122-60Hz-AC	NA	90kW	AC900	AC900	AC900	KEMBRS-1050	ETS250	4	4
EWAD495MZ-SS B2	3122-65Hz-AC	NA	90kW	AC900	AC900	AC900	KEMBRS-1050	ETS250	4	6
EWAD570MZ-SS B2	3122-75Hz-AC	90 Hz	120kW	AC900	AC900	AC900	KEMBRS-1050	ETS250	6	6
EWAD610MZ-SS B2	3122-80Hz-AC	NA	120kW	AC900	AC900	AC900	KEMBRS-1050	ETS250	6	6
EWAD660MZ-SS B2	3122-85Hz-AC	NA	120kW	AC900	AC900	AC900	KEMBRS-1050	ETS250	6	6
EWAD700MZ-SS B2	3122-90Hz-AC	NA	120kW	AC900	AC900	AC900	KEMBRS-1050	ETS250	6	8
EWAD820MZ-SS B2	310240S-65Hz-AC	80 Hz	200kW	AC900	AC900	AC900	KEMBRS-1050	ETS250	6	8
EWAD900MZ-SS B2	310240L-60Hz-AC	NA	200kW	AC900	AC900	AC900	KEMBRS-1050	ETS250	6	8
EWADC10MZ-SS B2	310240L-63Hz-AC	NA	200kW	AC900	AC900	AC900	KEMBRS-1050	ETS250	8	8
EWADH10MZ-SS B2	310240L-67Hz-AC	85 Hz	200kW	AC900	AC900	AC900	KEMBRS-1050	ETS250	8	10
EWADH11MZ-SS B2	310240L-70Hz-AC	NA	200kW	AC900	AC900	AC900	KEMBRS-1050	ETS250	10	12

Unit Configuration for EWAD MZC Platinum(PS) New



New fans and compressors models are introduced in this configuration.

The new fans have been introduced for units manufactured since 13/06/2022

The new compressors have been introduced for units manufactured since 20/01/2022

Modello Daikin	Compressore	Opt. 260 Boost Comp	Inverter	Fan Type 50/60 Hz	Fan Brine 50/60 Hz	Fan Type Opt. 142 HA 50/60 Hz	Fan Type Opt.158	EXV	FanC1	FanC2
EWAD360MZ-PS B2	3120-60Hz-DC	NA	90kW	KEMBRS-1050	KEMBRS-1050	KEMBRS-1050	STD	ETS100	4	6
EWAD420MZ-PS B2	3120-70Hz-DC	NA	90kW	KEMBRS-1050	KEMBRS-1050	KEMBRS-1050	STD	ETS100	4	6
EWAD450MZ-PS B2	3122-60Hz-DC	NA	120kW	KEMBRS-1050	KEMBRS-1050	KEMBRS-1050	STD	ETS250	6	6
EWAD540MZ-PS B2	3122-65Hz-DC	NA	120kW	KEMBRS-1050	KEMBRS-1050	KEMBRS-1050	STD	ETS250	6	6
EWAD570MZ-PS B2	3122-70Hz-DC	NA	120kW	KEMBRS-1050	KEMBRS-1050	KEMBRS-1050	STD	ETS250	6	6
EWAD610MZ-PS B2	3122-75Hz-DC	NA	120kW	KEMBRS-1050	KEMBRS-1050	KEMBRS-1050	STD	ETS250	6	8
EWAD660MZ-PS B2	3122-80Hz-DC	NA	120kW	KEMBRS-1050	KEMBRS-1050	KEMBRS-1050	STD	ETS250	8	8
EWAD680MZ-PS B2	3122-85Hz-DC	NA	120kW	KEMBRS-1050	KEMBRS-1050	KEMBRS-1050	STD	ETS250	8	8
EWAD770MZ-PS B2	310240S-62Hz-DC	NA	200kW	KEMBRS-1050	KEMBRS-1050	KEMBRS-1050	STD	ETS250	8	8
EWAD850MZ-PS B2	310240S-69Hz-DC	NA	200kW	KEMBRS-1050	KEMBRS-1050	KEMBRS-1050	STD	ETS250	8	8
EWAD910MZ-PS B2	310240L-60Hz-DC	NA	200kW	KEMBRS-1050	KEMBRS-1050	KEMBRS-1050	STD	ETS250	8	10
EWADC10MZ-PS B2	310240L-63Hz-DC	NA	200kW	KEMBRS-1050	KEMBRS-1050	KEMBRS-1050	STD	ETS250	10	10
EWADH10MZ-PS B2	310240L-67Hz-DC	NA	200kW	KEMBRS-1050	KEMBRS-1050	KEMBRS-1050	STD	ETS250	10	12
EWADC11MZ-PS B2	310240L-70Hz-DC	NA	200kW	KEMBRS-1050	KEMBRS-1050	KEMBRS-1050	STD	ETS250	12	12

9.3 Pump Inverter Settings (Table C)

Parametro	Descrizione	Settings	Default	NOTE
0-03	Regional Settings	default	[0] International	
0-06	Grid Type	[12] 380-440V/50Hz	[12] 380-440V/50Hz	Verificare Tensione di alimentazione su R.M.
1-10	Motor Construction	default	[0] Asynchron	
1-20	Motor Power	default	Size related	Verificare Targa Motore
1-22	Motor Voltage	400 V	Size related	Verificare Targa Motore
1-23	Motor Frequency	50 Hz	Size related	Verificare Targa Motore
1-24	Motor Nominal Current	default	Size related	Verificare Targa Motore
1-25	Motor Nominal Speed	See Pump Motor Label	Size related	Verificare Targa Motore
1-73	Flying Start	default	[0] Disabled	
3-02	Minimum Reference	-	0	Con velocità comandata dal cliente, impostare a 40Hz.
3-03	Maximum Reference	50	50	Come 1-23 a meno che non sia riportata su R.M. una velocità inferiore
3-41	Ramp-Up Time	10 s	Size related	Tempo per arrivare a 1-23 frequency
3-42	Ramp-Down Time	10 s	Size related	Tempo per fermarsi da 1-23 frequency
4-12	Motor Speed Low Limit [Hz]	default	0	
4-14	Motor Speed High Limit [Hz]	default	65	
4-19	Max Output Frequency	default	Size related	
5-40	Function Relay [0]	default	Alarm	
5-40	Function Relay [1]	default	Drive running	
6-10	Terminal 53 Low Voltage	default	0.07 V	
6-11	Terminal 53 High Voltage	default	10 V	
6-12	Terminal 53 Low Current	default	4 mA	
6-13	Terminal 53 Low Voltage	default	20 mA	
6-19	Terminal 53 mode	default	1	Voltage input - [0] commuta all'ingresso in corrente

9.4 Pre-Commissioning Sheet (Table D)



Pre-Commissioning Sheet

Job Name: _____

Unit Model No.(s): _____

Daikin Serial Unit No.: _____

Chilled Water

- Piping complete
- Water System filled and vented
- Pumps installed & operational (rotation checked)
- Strainers installed and clean
- Controls (3-way valves, bypass valves, etc.) operable
- Flow switch installed
- Water system operated and flow balanced to meet unit design requirements
- Proper glycol percentage for the application in accordance with Daikin specifications

Yes No N/A

Condenser Water

- Cooling tower flushed, filled and piping vented
- Pumps installed & operational (rotation checked)
- Strainers installed and clean
- Controls (3-way valves, bypass valves, etc.) operable
- Water system operated and flow balanced to meet unit design requirements
- Proper glycol percentage for the application in accordance with Daikin specifications

Yes No N/A

Electrical

- Power leads connected to unit main terminal block
- Power leads have been checked for proper electrical phasing U-V-W for L1, L2, & L3 respectively.
- All interlock wiring complete and complies with Daikin specifications
- Pump starter and interlocks wired
- Cooling tower fans and controls wired
- Wiring complies with National Electrical Code and local codes

Yes No N/A

Miscellaneous

- Unit installed in accordance with Daikin IOM specifications (leveling, space requirements, ...)
- Thermometer wells, thermometers, gauges, control wells, controls, etc., installed
- A minimum system load of 60% of machine capacity is available for testing and adjusting controls

Yes No N/A

Warning: Under no condition should these units be started prior to the authorized start-up by Daikin Applied. Failure to follow this warning may result in serious equipment damage and will negate the warranty.

All installation work has been completed as checked above; the system has been inspected and the unit is ready for start-up

Site Engineer

Name: _____

Date: _____

Signature: _____

9.5 Commissioning Sheet (Table E)

		CHILLER COMMISSIONING SHEET - EWAD-TZ																																																																																																																																																																																																																																																																																																																																																																																																			
End user:				Date:				Serial nr.:																																																																																																																																																																																																																																																																																																																																																																																													
Site:				Model nr.:																																																																																																																																																																																																																																																																																																																																																																																																	
Distributor:				Serial nr.:																																																																																																																																																																																																																																																																																																																																																																																																	
A PRE-POWER ON CHECK LIST				D STARTUP CHECK LIST																																																																																																																																																																																																																																																																																																																																																																																																	
A1 : Any shipping damage?				D1 : Running Adjustments performed (calibrations)?																																																																																																																																																																																																																																																																																																																																																																																																	
A2 : Is the chiller adequately level mounted?				D1 : Safety tests performed?																																																																																																																																																																																																																																																																																																																																																																																																	
A3 : Are minimum space requirements met?				DATA ACQUISITION																																																																																																																																																																																																																																																																																																																																																																																																	
A4 : Anti vibration pads installed?														Mode:		Chiller		Circuit:		C1	C2																																																																																																																																																																																																																																																																																																																																																																																
A5 : Full Leak Test performed?				Percentage of Load:																																																																																																																																																																																																																																																																																																																																																																																																	
A6 : Water piping system checked?																																																																																																																																																																																																																																																																																																																																																																																																					
A7 : Water Flows checked?																																																																																																																																																																																																																																																																																																																																																																																																					
A8 : Glycol type / percentage [Evap/Cond]				D1.1 Comp running Amps L1 (A)																																																																																																																																																																																																																																																																																																																																																																																																	
A9 : Are electrical connections correct?				D1.2 Comp running Amps L2 (A)																																																																																																																																																																																																																																																																																																																																																																																																	
A10 : Compressor model C1				D1.3 Comp running Amps L3 (A)																																																																																																																																																																																																																																																																																																																																																																																																	
A11 : Compressor serial C1				D1. ELECTRICAL SYSTEM																																																																																																																																																																																																																																																																																																																																																																																																	
A12 : Compressor model C2																																																																																																																																																																																																																																																																																																																																																																																																					
A13 : Compressor serial C2				B PRE-STARTUP CHECK LIST				D2 REFRIGERANT SYSTEM										B1 : Evaporator Flow Switch Check				D2.1 Evaporator Pressure (kPa)								B2 : Condenser Flow Switch Check				D2.2 Condenser Pressure (kPa)								B3 : Main VOLTAGE L1-L2 (V)				D2.3 Suction Temperature (°C)								B4 : Main VOLTAGE L2-L3 (V)				D2.4 Condenser Pressure (kPa)								B5 : Main VOLTAGE L1-L3 (V)				D2.5 Suction Temperature (°C)								B6 : Frequency (Hz)				D2.6 Discharge Superheat (°C)								B7 : Control voltage Tx IN / OUT (V)				D2.7 Liquid Temperature (°C)								B8 : Control voltage AL1(V)				D2.8 Liquid Pressure (kPa)								B9 : Oil Heaters were on before start up?				D2.9 Subcooling (°C)								B10 : Check Heaters (A) (measure current)				C1	C2	VFD1	VFD2	D2.10 Subcooling at dryer filter (°C)				B11 : Unit Software Version				D2.11 Evaporator Approach (°C)										B12 : Unit Water Temp Set Point Cool/Heat (°C)				B13 : Unit settings checked?				D2.12 Condenser Approach (°C)										B14 : Circuit settings checked?				B15 : Alarm Limits set?				D2.13 Oil Pressure (kPa)										B16 : Evap Water Frz Alarm Setpoint (°C)				B17 : Dry Test performed?				D2.14 Oil Pressure Differential (kPa)										B18 : Can the chiller put into operation?				C PRE-STARTUP COMMENTS				D2.15 EXV Position (%)														E POST-STARTUP COMMENTS				D2.16 Fans (%)														F Defective items found at commissioning?				D2.17 Economizer/Subcooler Status										1: Parts subject to ECHC?				2: Parts requested to be directly supplied by factory?				<i>Please mention under which conditions parts are directly requested to the factory (ie. Urgent matter, Extra Europe affiliate or others):</i>										G Present during commissioning				D2.18 Economizer EXV Position (%)										Name :				Company:										Name :				Company:										Name :				Company:										Author:				Installer:										Signature:				Signature:										Title: Service Engineer				Title:										<p>As Commissioning is a technical process performed - before the Chiller is put into definitive operation - by an "Authorised Engineer". As Commissioning is done and is intended to achieve the following specific limited objectives: - verify and document (via checklist) that the Chiller is installed according to the manufacturers installation manual and operation manual. - configure the Chiller to a set of manufacturers defined parameters in order to secure the correct performance of the Chiller in the specific site related operating conditions.</p> <p>Therefore the Commissioning process does not take away from or reduce the responsibility of the System Designers and/or Installers to provide a finished and fully functioning system.</p>													
B PRE-STARTUP CHECK LIST				D2 REFRIGERANT SYSTEM																																																																																																																																																																																																																																																																																																																																																																																																	
B1 : Evaporator Flow Switch Check				D2.1 Evaporator Pressure (kPa)																																																																																																																																																																																																																																																																																																																																																																																																	
B2 : Condenser Flow Switch Check				D2.2 Condenser Pressure (kPa)																																																																																																																																																																																																																																																																																																																																																																																																	
B3 : Main VOLTAGE L1-L2 (V)				D2.3 Suction Temperature (°C)																																																																																																																																																																																																																																																																																																																																																																																																	
B4 : Main VOLTAGE L2-L3 (V)				D2.4 Condenser Pressure (kPa)																																																																																																																																																																																																																																																																																																																																																																																																	
B5 : Main VOLTAGE L1-L3 (V)				D2.5 Suction Temperature (°C)																																																																																																																																																																																																																																																																																																																																																																																																	
B6 : Frequency (Hz)				D2.6 Discharge Superheat (°C)																																																																																																																																																																																																																																																																																																																																																																																																	
B7 : Control voltage Tx IN / OUT (V)				D2.7 Liquid Temperature (°C)																																																																																																																																																																																																																																																																																																																																																																																																	
B8 : Control voltage AL1(V)				D2.8 Liquid Pressure (kPa)																																																																																																																																																																																																																																																																																																																																																																																																	
B9 : Oil Heaters were on before start up?				D2.9 Subcooling (°C)																																																																																																																																																																																																																																																																																																																																																																																																	
B10 : Check Heaters (A) (measure current)				C1	C2	VFD1	VFD2	D2.10 Subcooling at dryer filter (°C)																																																																																																																																																																																																																																																																																																																																																																																													
B11 : Unit Software Version				D2.11 Evaporator Approach (°C)																																																																																																																																																																																																																																																																																																																																																																																																	
B12 : Unit Water Temp Set Point Cool/Heat (°C)																																																																																																																																																																																																																																																																																																																																																																																																					
B13 : Unit settings checked?				D2.12 Condenser Approach (°C)																																																																																																																																																																																																																																																																																																																																																																																																	
B14 : Circuit settings checked?																																																																																																																																																																																																																																																																																																																																																																																																					
B15 : Alarm Limits set?				D2.13 Oil Pressure (kPa)																																																																																																																																																																																																																																																																																																																																																																																																	
B16 : Evap Water Frz Alarm Setpoint (°C)																																																																																																																																																																																																																																																																																																																																																																																																					
B17 : Dry Test performed?				D2.14 Oil Pressure Differential (kPa)																																																																																																																																																																																																																																																																																																																																																																																																	
B18 : Can the chiller put into operation?																																																																																																																																																																																																																																																																																																																																																																																																					
C PRE-STARTUP COMMENTS				D2.15 EXV Position (%)																																																																																																																																																																																																																																																																																																																																																																																																	
E POST-STARTUP COMMENTS				D2.16 Fans (%)																																																																																																																																																																																																																																																																																																																																																																																																	
F Defective items found at commissioning?				D2.17 Economizer/Subcooler Status																																																																																																																																																																																																																																																																																																																																																																																																	
1: Parts subject to ECHC?																																																																																																																																																																																																																																																																																																																																																																																																					
2: Parts requested to be directly supplied by factory?				<i>Please mention under which conditions parts are directly requested to the factory (ie. Urgent matter, Extra Europe affiliate or others):</i>																																																																																																																																																																																																																																																																																																																																																																																																	
G Present during commissioning				D2.18 Economizer EXV Position (%)																																																																																																																																																																																																																																																																																																																																																																																																	
Name :				Company:																																																																																																																																																																																																																																																																																																																																																																																																	
Name :				Company:																																																																																																																																																																																																																																																																																																																																																																																																	
Name :				Company:																																																																																																																																																																																																																																																																																																																																																																																																	
Author:				Installer:																																																																																																																																																																																																																																																																																																																																																																																																	
Signature:				Signature:																																																																																																																																																																																																																																																																																																																																																																																																	
Title: Service Engineer				Title:																																																																																																																																																																																																																																																																																																																																																																																																	
<p>As Commissioning is a technical process performed - before the Chiller is put into definitive operation - by an "Authorised Engineer". As Commissioning is done and is intended to achieve the following specific limited objectives: - verify and document (via checklist) that the Chiller is installed according to the manufacturers installation manual and operation manual. - configure the Chiller to a set of manufacturers defined parameters in order to secure the correct performance of the Chiller in the specific site related operating conditions.</p> <p>Therefore the Commissioning process does not take away from or reduce the responsibility of the System Designers and/or Installers to provide a finished and fully functioning system.</p>																																																																																																																																																																																																																																																																																																																																																																																																					

10 APPENDIX

10.1 VFD Addressing procedure by controller



INFORMATION

This procedure should not be carried out during the commissioning.
Must only be carried out when replacing inverters.

10.1.1 Circuit 2 compressor inverter address configuration



CAUTION

In phase of commissioning this setting is not to be carried out.
The inverter address configuration is necessary only after a replacement of the inverter P.C.B. on Circuit 2.

1. Power the circuit 2 compressor inverter
2. Remove power from the circuit 1 compressor inverter
3. Wait 5 minutes
4. Enter technician password
5. Open the menu: View / Set Unit -> Compressor VFD Settings -> Comp VFD Address
6. Execute the writing command by setting Set Inv2 Addr = Execute and wait for it to automatically return to Set Inv2 Addr = Hold. During the execution of the write command, "Writing" will appear on the display. At the end of the command, the words "Failed" or "Pass" will be displayed depending on the outcome of the command. "Failed" identifies that the address has not been written, while the completely correct command is identified with the word "Pass".
7. Remove power from the circuit 2 compressor inverter
8. Wait 5 minutes
9. Power up both inverters and check that the addresses on the two compressors are correct. For verification, simply remove the suction pressure transducer and check that the alarm is associated with the corresponding circuit.

10.1.2 Reset compressor inverter address circuit 1



CAUTION

Warning! The following procedure should only be carried out if, by mistake, the circuit 1 compressor inverter has address 2.

1. Power the circuit 1 compressor inverter
2. Remove power from the circuit 2 compressor inverter
3. Wait 5 minutes
4. Enter Technician password
5. Open the menu: View / Set Unit -> Compressor VFD Setup -> Comp VFD Address
6. Execute the write command by setting Reset Default = Execute and wait for automatically go back to Reset Default = Hold. During the execution of the writing, "Writing" will appear on the display. At the end of the command, the words "Failed" or "Pass" will be displayed depending on the outcome of the command. "Failed" identifies that the address has not been written, while the completely correct of the command comes identified with the word "Pass".
7. Remove power from the circuit 1 compressor inverter
8. Wait 5 minutes
9. Power up both inverters and check that the addresses on the two compressors are correct. For verification, simply remove the suction pressure transducer and check that the alarm is associated with the corresponding circuit.

10.1.3 Filter setting on the pressure transducer reading

In case of dual machine, this procedure can be carried out only after performing the configuration of the circuit 2 compressor address.

1. Power up both compressors
2. Enter Technician password in the controller
3. Open the menu: View / Set Unit -> Compressor VFD Setup -> Filter
4. Execute the writing command by setting Set Inv1 Fltr = Execute and wait for it to automatically return to Set Inv1 Fltr = Hold.
 1. As for writing the address, the word "Writing" will appear during the execution of the command and at the end the word "Failed" or "Pass" will appear to identify the outcome of the writing.
5. Execute the writing command by setting Set Inv2 Fltr = Execute and wait for it to automatically return to Set Inv2 Fltr = Hold.
 2. As for writing the address, the word "Writing" will appear during the execution of the command and at the end the word "Failed" or "Pass" will appear to identify the outcome of the writing.

10.2 Economizer line anti chattering troubleshooting

Prerequisite:

- Latest ATLAS software version installed.
- Following SVI or ESV (if applicable) done.

Topic	SVI number	ESV number
EWAD-TZB ANTICHATTERING KIT	SVI 20007-3A	ESV1908487-2A
ANTICHATTERING KIT SOLENOID VALVE BREAKDOWN	SVI 20013-1B	ESV2013121-1A
EWAD-TZC HIGH PRESSURE PIPE RELOCATION	SVI 21009-1B	ESV 2101989-1A
EWAD_H-TZB_C - Modification of economizer deactivation logic	SVI 21016-1	ESV2107157-1

Check with unit Off:

1. Check the position of the solenoid valve and ensure that the yellow mark is pointing towards the high pressure port as shown in the image below



Is the solenoid valve correctly installed?	Action
Yes	Continue with the next step
No	Invert the solenoid valve position

2. Energize the solenoid valve and check the generation of the magnetic field, refer to paragraph [Economizer anti chattering system test](#)

Is the solenoid valve working properly?	Action
Yes	Continue with the next step
No	Fix the electrical fault

Check with unit On



You need to have enough load to have the circuit running

- **From minimum to maximum capacity**
- **From maximum to minimum capacity**


Target of the test is to verify the Economizer de-activation, consequent solenoid valves activation and trend of the economizer pressure.

Monitor the following data while unit running:

- Economizer state
View/Set Circuit → Circuit 1 or 2 → Economizer → State → On to Off
- Saturated condensing temperature
- Circuit Capacity
- Pressure ratio
- Evaporating pressure
- Economizer pressure
- Suction/Discharge Solenoid Valve

View/Set Circuit → Circuit 1 or 2 → Economizer → Disch Sol Valve → Off to On
View/Set Circuit → Circuit 1 or 2 → Economizer → Suct Sol Valve → Off to On

When the eco is de-activated (after a first activation), ant chattering kit works (suction and discharge solenoid valves are energized) and economizer pressure decreasing to evaporating pressure value is expected:

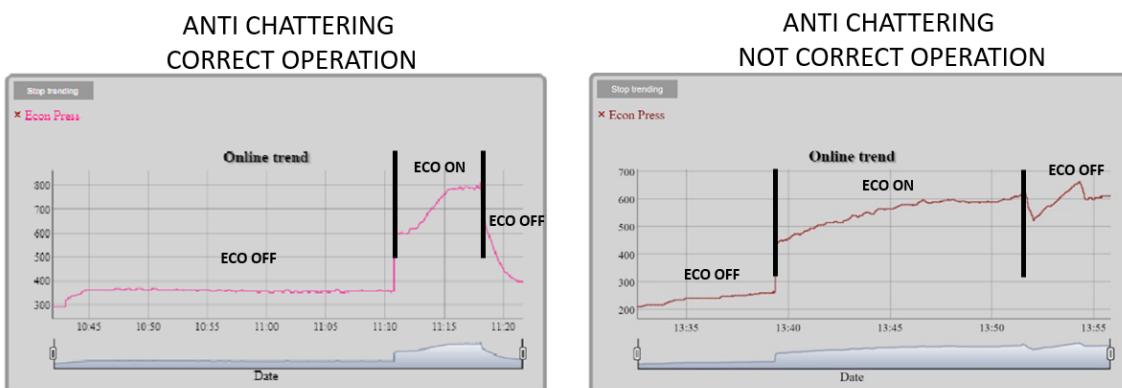

1. Check the 230V for the discharge and suction solenoid valve, refer to paragraph [Economizer anti chattering system test](#)

Note: this time do not test in Test mode, but


Is the solenoid valve working properly?	Action
Yes	Continue with the next step
No	Fix the electrical fault

2. Turn OFF the unit

3. Remove the shreaders on the high-pressure connection ports



4. Repeat the checks
5. Check the solenoid valve for any gas leaks

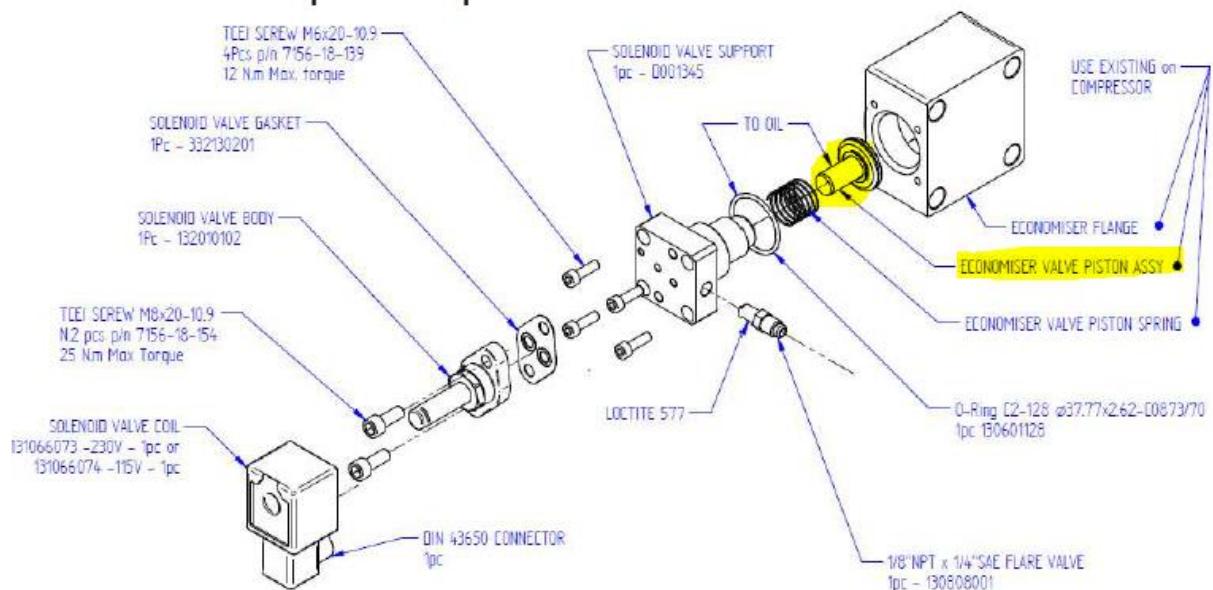

If the problem persists, contact servicesupport@daikinapplied.eu