

Floor standing unit Air Conditioning Technical Data FXLQ-P



FXLQ20P5VEB
FXLQ25P5VEB
FXLQ32P5VEB
FXLQ40P5VEB
FXLQ50P5VEB
FXLQ63P5VEB

TABLE OF CONTENTS

FXLQ-P

1	Features	4
	FXLQ-P	4
2	Specifications	5
3	Electrical data	6
4	Safety device settings	7
5	Options	8
6	Capacity tables	9
	Cooling Capacity Tables	9
	Heating Capacity Tables	10
7	Dimensional drawings	11
8	Centre of gravity	13
9	Piping diagrams	14
10	Wiring diagrams	15
	Wiring Diagrams - Single Phase	15
11	Sound data	16
	Sound Pressure Spectrum	16

1 Features

1 - 1 FXLQ-P

For perimeter zone air conditioning

1

- › Unit can be installed as free standing model by use of optional back plate
- › Its low height enables the unit to fit perfectly beneath a window
- › Stylish modern casing finished in pure white (RAL9010) and iron grey (RAL7012) blends easily with any interior
- › Requires very little installation space
- › Wall mounted installation facilitates cleaning beneath the unit where dust tends to accumulate
- › Wired remote control can easily be integrated in the unit



Home leave operation



Fan only



Auto cooling-heating changeover



Fan speed steps (3 steps)



Dry programme



Air filter



Weekly timer (optional)



Infrared remote control (optional)



Wired remote control (optional)



Centralised control (optional)



Auto-restart



Self diagnosis



Multi tenant (optional)

2 Specifications

2 - 1 Specifications

Technical specifications				FXLQ20P	FXLQ25P	FXLQ32P	FXLQ40P	FXLQ50P	FXLQ63P
Cooling capacity	Sensible capacity	At high fan speed	kW	1.70	2.10	2.50	3.10	3.90	4.90
	Latent capacity	At high fan speed	kW	0.500	0.700	1.10	1.40	1.70	2.20
	Total capacity	At high fan speed	kW	2.2 (1)	2.8 (1)	3.6 (1)	4.5 (1)	5.6 (1)	7.1 (1)
Heating capacity	Total capacity	At high fan speed	kW	2.5 (2)	3.2 (2)	4.0 (2)	5.0 (2)	6.3 (2)	8.0 (2)
Power input - 50Hz	Cooling	At high fan speed	kW	0.05 (1)		0.09 (1)		0.11 (1)	
	Heating	At high fan speed	kW	0.05 (2)		0.09 (2)		0.11 (2)	
Power input - 60Hz	Cooling	At high fan speed	kW	0.05 (1)		0.08 (1)		0.11 (1)	
	Heating	At high fan speed	kW	0.05 (2)		0.08 (2)		0.11 (2)	
Dimensions	Unit	Height	mm			600			
		Width	mm	1,000		1,140		1,420	
		Depth	mm			232			
	Packed unit	Height	mm			720			
		Width	mm	1,128		1,268		1,548	
		Depth	mm			346			
Weight	Unit		kg	27		32		38	
	Packed unit		kg	32		37		43	
Casing	Colour			Fresh white (RAL9010) / Dark grey (RAL7012)					
Heat exchanger	Rows	Quantity				3			
	Fin pitch		mm			1.50			
	Face area		m ²	0.159		0.200		0.282	
	Stages	Quantity				14			
	Fin	Type				Cross fin coil			
Fan	Type					Sirocco fan			
	Air flow rate	Cooling	At high fan speed	m ³ /min	7	8	11	14	16
	- 50Hz		At low fan speed	m ³ /min	6.0		8.5	11.0	12.0
Fan motor	Drive					Direct drive			
Sound power level	Cooling	At high fan speed	dBA		54		57	58	59
Sound pressure level	Cooling	At high fan speed	dBA		35		38	39	40
		At low fan speed	dBA		32		33	34	35
	Heating	At high fan speed	dBA		35		38	39	40
		At low fan speed	dBA		32		33	34	35
Refrigerant	Type					R-410A			
	GWP					2,087.5			
	Control					Electronic expansion valve			
Piping connections	Liquid	Type				Flare connection			
		OD	mm			6.35			
Piping connections	Gas	Type				Flare connection			
		OD	mm			12.7		15.9	
	Drain					O.D. 21 (Vinyl chloride)			
	Heat insulation					Glass Fiber/Urethane Foam			
	Sound absorbing insulation					Glass fiber / Urethane foam			
Air filter	Type					Resin net			
Safety devices	Item	01				Fuse			
		02				Fan motor thermal protection			
Control systems	Infrared remote control					BRC4C65			
	Wired remote control					BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52			
	Simplified wired remote control for hotel applications					BRC2E52C (heat recovery type) / BRC3E52C (heat pump type)			

Electrical specifications				FXLQ20P	FXLQ25P	FXLQ32P	FXLQ40P	FXLQ50P	FXLQ63P
Power supply	Name					VE			
	Phase					1~			
	Frequency		Hz			50/60			
	Voltage		V			220-240/220			
Current - 50Hz	Minimum circuit amps (MCA)		A	0.3			0.6		
	Maximum fuse amps (MFA)		A			15			
	Full load amps (FLA)	Total	A	0.2			0.5		
Current - 60Hz	Minimum circuit amps (MCA)		A	0.3		0.5		0.6	
	Maximum fuse amps (MFA)		A			15			
	Full load amps (FLA)	Total	A	0.2		0.4		0.5	

(1)Cooling: indoor temp. 27°CDB, 19°CWB; outdoor temp. 35°CDB; equivalent piping length: 7.5m (horizontal) |

(2)Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 7.5m (horizontal) |

(3)Capacities are net, including a deduction for cooling (an addition for heating) for indoor fan motor heat. |

(4)Voltage range: units are suitable for use on electrical systems where voltage supplied to unit terminal is not below or above listed range limits. |

(5)Maximum allowable voltage range variation between phases is 2%. |

(6)MCA/MFA: MCA = 1.25 x FLA |

(7)MFA ≤ 4 x FLA |

(8)Next lower standard fuse rating minimum 15A |

(9)Select wire size based on the value of MCA |

(10)Contains fluorinated greenhouse gases |

(11)Instead of a fuse, use a circuit breaker

3 Electrical data

3 - 1 Electrical Data

FXLQ-P

MODEL	UNITS			POWER SUPPLY		IFM		INPUT (W)	
	Hz	V	VOLTAGE RANGE	MCA	MFA	kW	FLA	COOLING	HEATING
FXLQ20P5VEB	50	220-240	MAX. 264 MIN. 198	0, 3	15	0, 015	0, 2	49	49
FXLQ25P5VEB				0, 3	15	0, 015	0, 2	49	49
FXLQ32P5VEB				0, 6	15	0, 025	0, 5	90	90
FXLQ40P5VEB				0, 6	15	0, 025	0, 5	90	90
FXLQ50P5VEB				0, 6	15	0, 035	0, 5	110	110
FXLQ63P5VEB				0, 6	15	0, 035	0, 5	110	110

SYMBOLS:

MCA: MIN. CIRCUIT AMPS (A)
MFA: MAX. FUSE AMPS (SEE NOTE 5)
kW : FAN MOTOR RATED OUTPUT (kW)
FLA: FULL LOAD AMPS (A)
IFM: INDOOR FAN MOTOR

NOTES :

- VOLTAGE RANGE:
UNITS ARE SUITABLE FOR USE ON ELECTRICAL SYSTEMS WHERE VOLTAGE SUPPLIED TO UNIT TERMINALS IS NOT BELOW OR ABOVE LISTED RANGE LIMITS.
- MAXIMUM ALLOWABLE VOLTAGE UNBALANCE BETWEEN PHASES IS 2%.
- MCA/MFA
 $MCA = 1.25 \times FLA$
 $MFA \leq 4 \times FLA$
(NEXT LOWER STANDARD FUSE RATING. MIN. 15A)
- SELECT WIRE SIZE BASED ON THE MCA.
- INSTEAD OF FUSE, USE CIRCUIT BREAKER.

3D128572

4 Safety device settings

4 - 1 Safety Device Settings

FXLQ-P		FXLQ20P	FXLQ25P	FXLQ32P	FXLQ40P	FXLQ50P	FXLQ63P
PC BOARD FUSE		250V 5A					
FAN MOTOR THERMAL PROTECTOR	°C	OFF: 135 ^{±10} / ON: 120 or less					

3D034529G

5 Options

5 - 1 Options

FXLQ-P	Option kit	Product name	Availability		
			FXLQ20P2VEB	FXLQ32P2VEB	FXLQ50P2VEB
			FXLQ25P2VEB	FXLQ40P2VEB	FXLQ63P2VEB
			FXLQ20P5VEB	FXLQ32P5VEB	FXLQ50P5VEB
			FXLQ25P5VEB	FXLQ40P5VEB	FXLQ63P5VEB
	Wired remote control	BRC1D52/BRC1E53A7(5)/BRC1E53B7(6) BRC1E53C7(7)(8)/BRC1H52(W/S/K)/BRC 1H82(W/S)(7)(8)	✓	✓	✓
	Wireless remote control ·HP·	BRC4C65	✓	✓	✓
	Wireless remote control ·CO·	BRC4C66	✓	✓	✓
	Simplified remote control (with operation mode selector button)	BRC2E52C(2)(8)	✓	✓	✓
	Simplified remote control (without operation mode selector button)	BRC3E52C(2)(8)	✓	✓	✓
	Remote control for hotel use	BRC3A61	✓	✓	✓
	Adaptor for wiring	KRP1B61	✓	✓	✓
	Wiring adaptor for electrical appendices ·1·	KRP2A51	✓	✓	✓
	Wiring adaptor for electrical appendices ·2·	KRP4A51	✓	✓	✓
	Remote sensor	KRCS01-1	✓	✓	✓
	Central remote control	DCS302B51	✓	✓	✓
	Electrical box with earth terminal (·2· blocks)	KJB212A	✓	✓	✓
	Electrical box with earth terminal (·3· blocks)	KJB311A	✓	✓	✓
	Unified ON/OFF controller	DCS301BA51	✓	✓	✓
	Noise filter (for electromagnetic interface only)	KEK26-1	✓	✓	✓
	Schedule timer	DST301BA51	✓	✓	✓
	External adaptor for outdoor unit (installation on indoor unit)	DTA104A61	✓	✓	✓
	Long-life replacement filter	KAF361L28	✓	×	×
	Long-life replacement filter	KAF361L45	×	✓	×
	Long-life replacement filter	KAF361L71	×	×	✓
	Rear decoration panel	EKRDP25A5	✓	×	×
	Rear decoration panel	EKRDP40A5	×	✓	×
	Rear decoration panel	EKRDP63A5	×	×	✓
	Multi-tenant	EKMTAC	✓	✓	✓
	Digital input adaptor	BRP7A51(3)(4)	✓	✓	✓

①: This kit contains parts to connect with ·10· multi-tenant indoor units.
 ②: Included languages are:
 Language pack ·1·: English, German, French, Dutch, Spanish, Italian, and Portuguese.
 With PC cable ·EKPCAB3· in combination with the Updater PC software, you can additionally change the language to:
 Language pack ·2·: English, Bulgarian, Croatian, Czech, Hungarian, Romanian, and Slovenian.
 Language pack ·3·: English, Greek, Polish, Russian, Serbian, Slovak, and Turkish.
 ③: Only possible in combination with remote control ·BRC2/3E52C, BRC1E53A/B/C7, BRC1H52W/S/K, BRC1H82W/S·.
 ④: Requires installation box for adaptor PCB
 ⑤: Included languages are: English, German, French, Italian, Spanish, Portuguese, and Dutch.
 ⑥: Included languages are: English, Czech, Croatian, Hungarian, Slovenian, Romanian, and Bulgarian.
 ⑦: Included languages are: English, Russian, Greek, Turkish, Polish, Albanian, and Slovak.
 ⑧: Language pack ·3· of controller ·BRC1E53C7· is different from that of controller ·BRC2/3E52C7·.
 ⑨: Editable data for this drawing are available in the ·GDE (E-BOM)· system.

3D102604D

6 Capacity tables

6 - 1 Cooling Capacity Tables

FXLQ-P

TC: Total capacity; kW
SHC: Sensible heat capacity; kW

Unit size	Indoor air temp.													
	14.0 °CWB		16.0 °CWB		18.0 °CWB		19.0 °CWB		20.0 °CWB		22.0 °CWB		24.0 °CWB	
	20.0 °CDB		23.0 °CDB		26.0 °CDB		27.0 °CDB		28.0 °CDB		30.0 °CDB		32.0 °CDB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
20	1.5	1.3	1.8	1.5	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.6	2.4	1.5
25	1.9	1.6	2.3	1.8	2.6	2.0	2.8	2.1	3.0	2.1	3.0	2.0	3.1	1.9
32	2.4	2.1	2.9	2.2	3.4	2.5	3.6	2.5	3.8	2.5	3.9	2.4	4.0	2.3
40	3.0	2.5	3.6	2.7	4.2	3.1	4.5	3.1	4.7	3.2	4.9	3.1	5.0	2.9
50	3.8	3.0	4.5	3.4	5.2	3.8	5.6	3.9	5.9	4.0	6.0	3.8	6.2	3.6
63	4.8	3.7	5.7	4.2	6.6	4.8	7.1	4.9	7.5	4.9	7.7	4.7	7.8	4.3

CA03A095

6 Capacity tables

6 - 2 Heating Capacity Tables

FXLQ-P



Unit size	Indoor air temp. °CDB					
	16.0	18.0	20.0	21.0	22.0	24.0
	kW	kW	kW	kW	kW	kW
20	2.6	2.6	2.5	2.4	2.3	2.2
25	3.4	3.4	3.2	3.1	3.0	2.8
32	4.2	4.2	4.0	3.9	3.7	3.5
40	5.2	5.2	5.0	4.8	4.7	4.4
50	6.6	6.6	6.3	6.1	5.9	5.5
63	8.4	8.4	8.0	7.7	7.5	7.0

CA03A095

7 Dimensional drawings

7 - 1 Dimensional Drawings

FXLQ20-25P

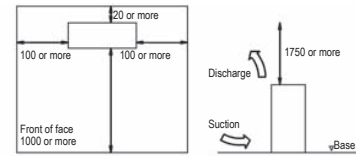
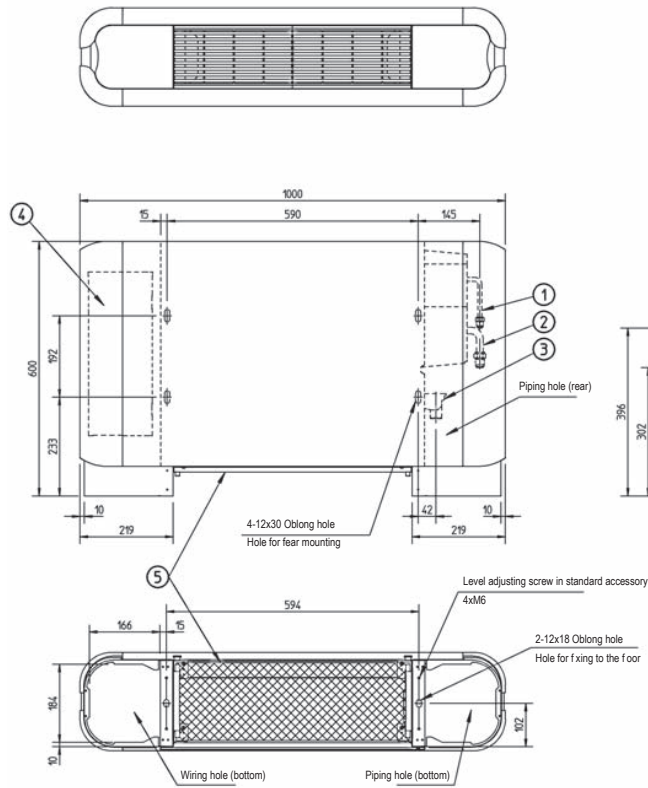


Required installation space

Item	Name	Description
1	Liquid pipe connection	Ø6.4 Flare connection
2	Gas pipe connection	Ø12.7 Flare connection
3	Drain pipe connection	O.D.Ø21
4	Switch box	
5	Air filter	

3TW32294-1

FXLQ32-40P

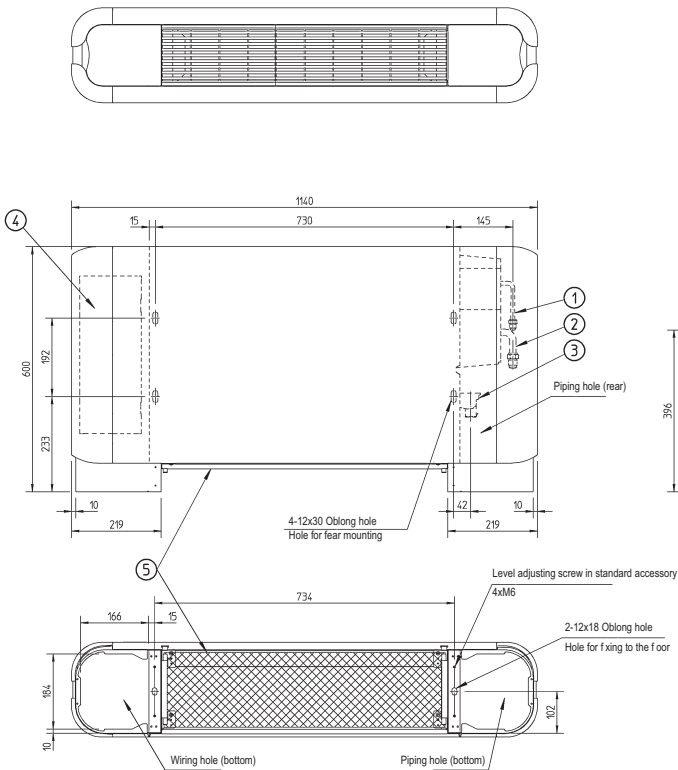

Required installation space




Item	Name	Description
1	Liquid pipe connection	Ø6.4 Flare connection
2	Gas pipe connection	Ø12.7 Flare connection
3	Drain pipe connection	O.D.Ø21
4	Switch box	
5	Air filter	

3TW32314-1

7 Dimensional drawings

7 - 1 Dimensional Drawings

FXLQ50-63P

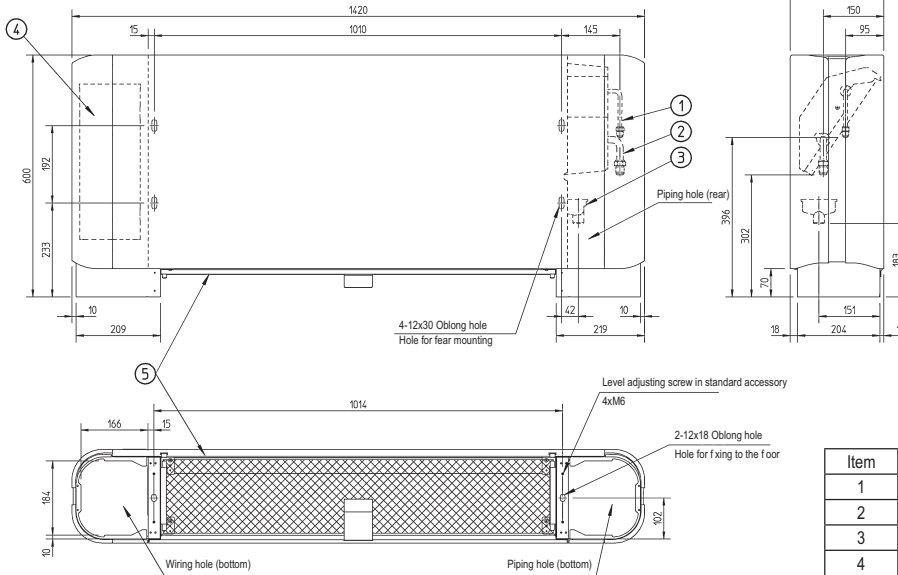

Model	A	B
FXL050	Ø6.4	Ø12.7
FXL063	Ø9.5	Ø15.9



Item	Name	Description
1	Liquid pipe connection	ØA Flare connection
2	Gas pipe connection	ØB Flare connection
3	Drain pipe connection	O.D.Ø21
4	Switch box	
5	Air filter	

3TW32334-1

8 Centre of gravity

8 - 1 Centre of Gravity

FXLQ-P

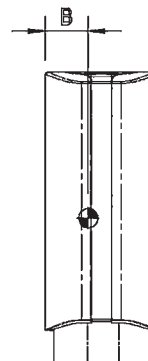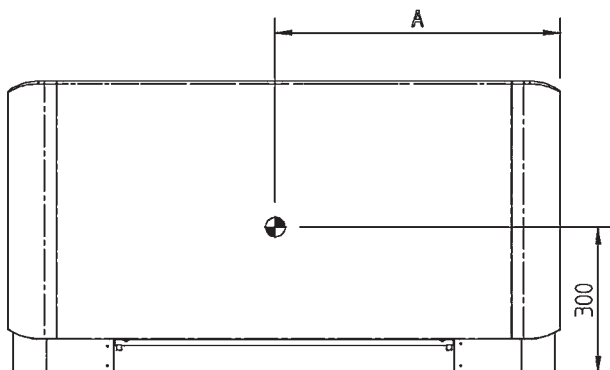


Model	A	B
FXLQ 20, 25 P	500	81
FXLQ 32, 40 P	588	89
FXLQ 50, 63 P	728	99

4TW32299-2

9 Piping diagrams

9 - 1 Piping Diagrams

FXLQ-P

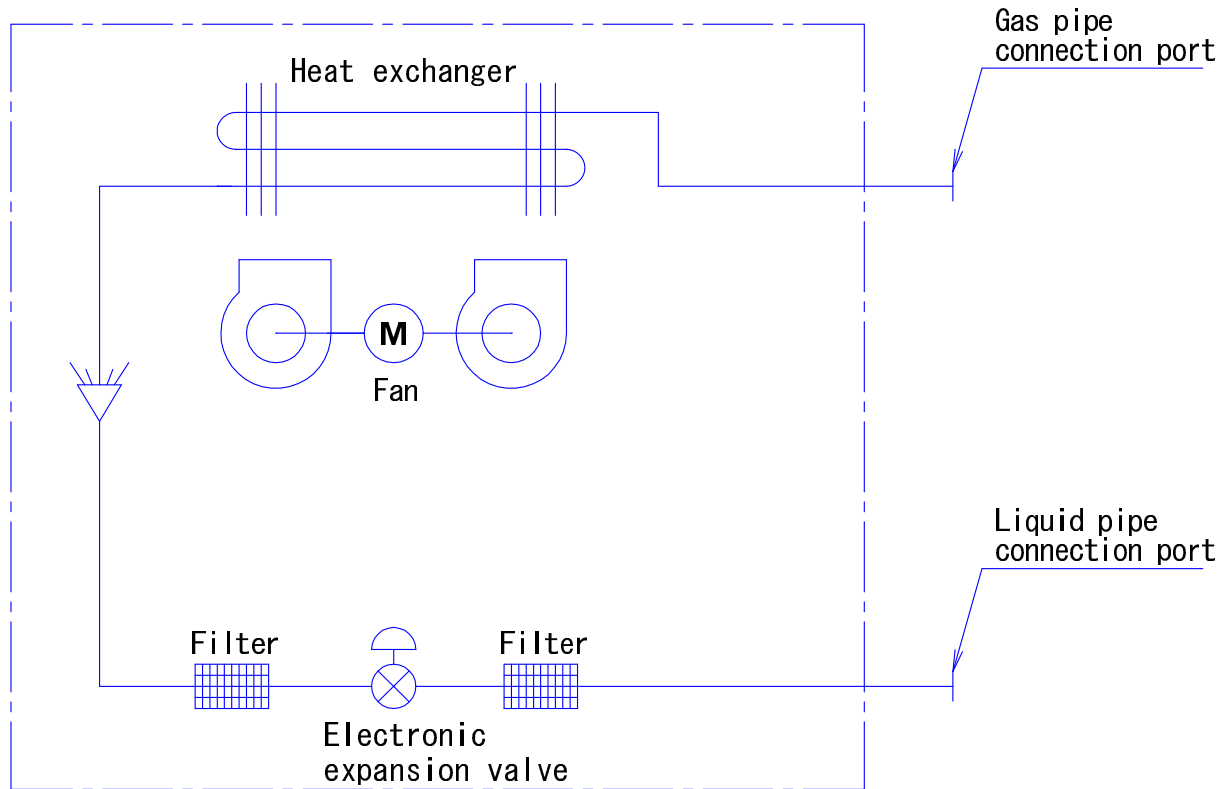

APPLICABLE MODEL


FXC, FXM, FXL, FXN
 FXH, FXK, FXS, FJSP
 CBXLS, FXSP, FXCP
 FZSP, FXNP, FJNP
 FHQ, FXA, FXMQ, FBQ
 FXAQ, FXSP~BA, FAQ, FCQ
 FZSP~BA (N), FSSP~BA,
 FQSP~BAN, FXUQ, FZCP, FZAP
 FXSQ~PV2S, FXSQ~T, FXSP~CA (N)
 FZSP~CA (N), FQSP~CAN
 FSSP~CA, FXSFP~AA, FSSFP~AA
 FXHQ

4D034245S

10 Wiring diagrams

10 - 1 Wiring Diagrams - Single Phase

FXLQ-P

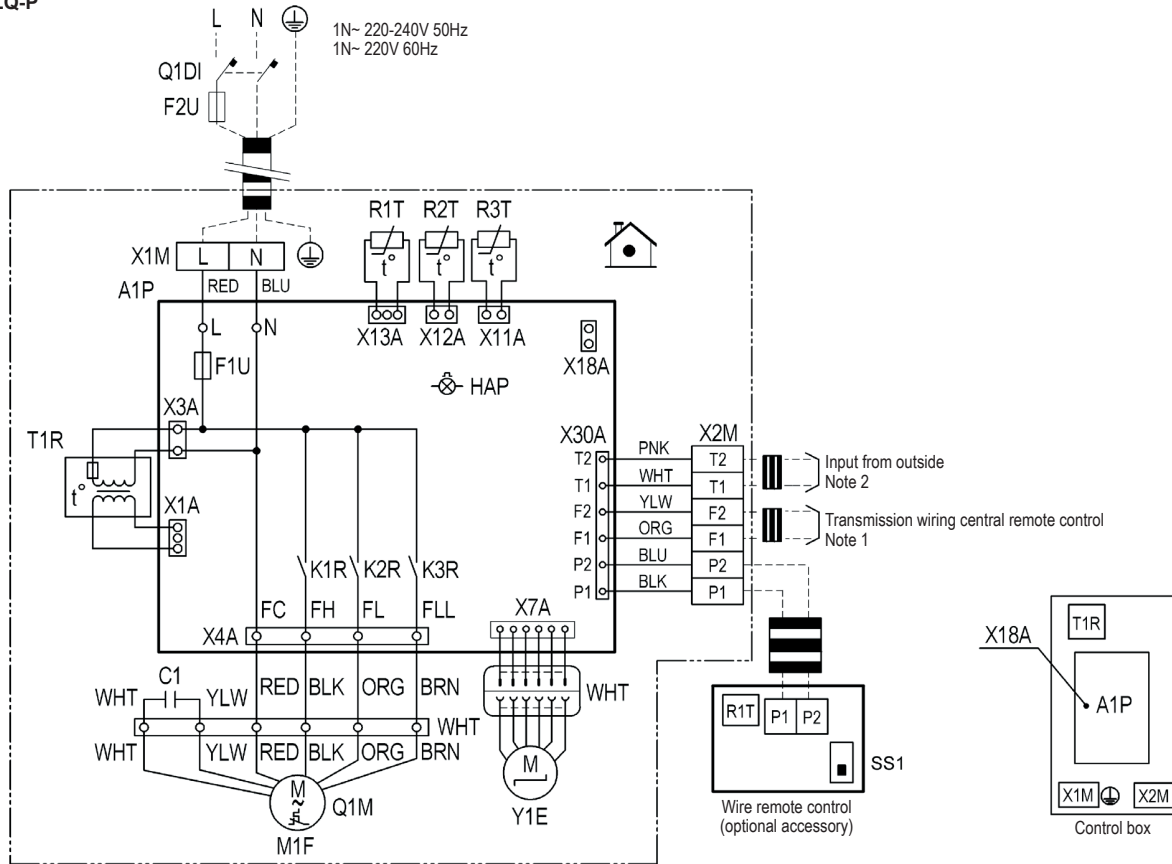

Indoor unit	
A1P	Printed circuit board
C1	Capacitor (M1F)
F1U	Fuse (B , 5A, 250V)
F2U	Field Fuse
HAP	Light emitting diode (service monitor green)
K1R-K3R	Magnetic relay (M1F)
M1F	Motor (indoor fan)
Q1M	Thermo switch (M1F embedded)
Q1DI	Earth Leak Detector
R1T	Thermistor (air)
R2T-R3T	Thermistor (coil)
T1R	Transformer (220-240V/22V)
X1M	Terminal block (power supply)
X2M	Terminal block (control)
Y1E	Electronic expansion valve
Wired remote control	
R1T	Thermistor (air)
SS1	Select switch (main/sub)
Connector optional accessory	
X18A	Connector (wiring adapter for electrical appendices)

Colors	
BLK	: Black
BLU	: Blue
BRN	: Brown
ORG	: Orange
PNK	: Pink
RED	: Red
WHT	: White
YLW	: Yellow

2D077874

NOTES

- When using the central remote control see manual for connection to the unit.
- When connecting the input wires from outside, forced "OFF" or "ON/OFF" operation can be selected by the remote control. See installation manual for more details.
- Use copper conductors only.


	: Terminal block		: Connector
	: Field wiring		: Terminal
L	: Live		: Protective earth (screw)
N	: Neutral		
	: Connector		

11 Sound data

11 - 1 Sound Pressure Spectrum

FXLQ20,25P

4D034528A

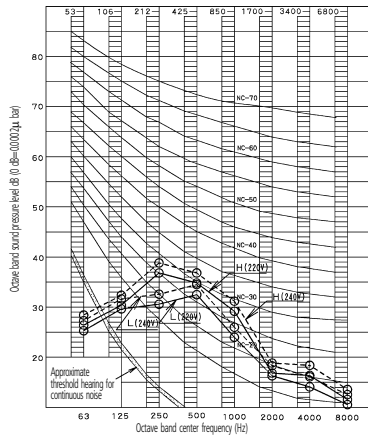

NOTES

1 Over all (dB):


(B, G, N is already rectified)

Scale	220V		240V	
	H	L	H	L
A	35	32	37	34
C	40	36.5	42	38.5


2 Measuring place: Anechoic chamber

3 Operating conditions:

- Power source: 220•240V/220V 50/60Hz
- JIS standard




4 Location of microphone



5 Operating noise differs with operation and ambient conditions.

FXLQ32P

4D034564A

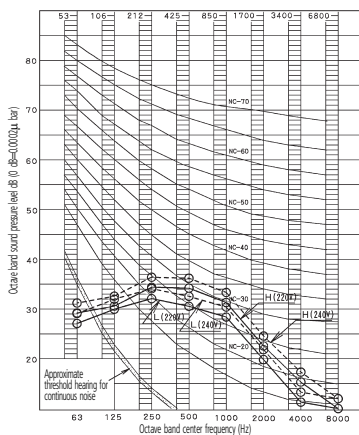

NOTES

1 Over all (dB):


(B, G, N is already rectified)

Scale	220V		240V	
	H	L	H	L
A	35	32	37	34
C	39	37	41	39


2 Measuring place: Anechoic chamber

3 Operating conditions:

- Power source: 220•240V/220V 50/60Hz
- JIS standard



4 Location of microphone




5 Operating noise differs with operation and ambient conditions.

11 Sound data

11 - 1 Sound Pressure Spectrum

FXLQ40P

4D034565A

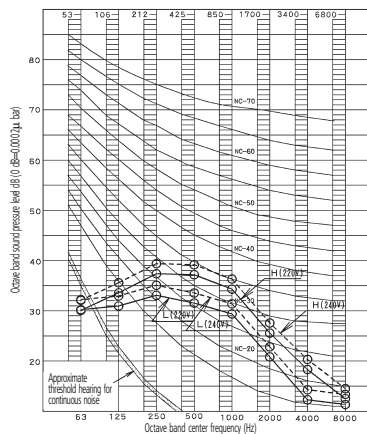

NOTES

- Over all (dB):
(B, G, N is already rectified)


Scale	220V		240V	
	H	L	H	L
A	38	33	40	35
C	42	38	44	40

- Measuring place: Anechoic chamber

- Operating conditions:

- Power source: 220•240V/220V 50/60Hz
- JIS standard


- Location of microphone



- Operating noise differs with operation and ambient conditions.

FXLQ50P

4D034566A

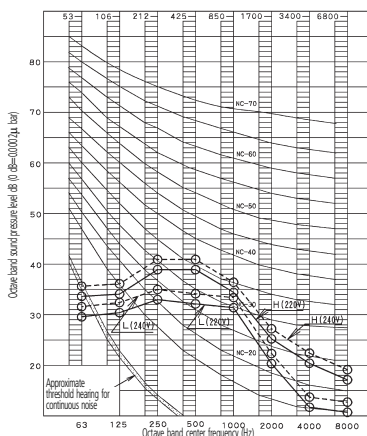

NOTES

- Over all (dB):
(B, G, N is already rectified)


Scale	220V		240V	
	H	L	H	L
A	39	34	41	36
C	44	38.5	46	40.5

- Measuring place: Anechoic chamber

- Operating conditions:

- Power source: 220•240V/220V 50/60Hz
- JIS standard

- Location of microphone




- Operating noise differs with operation and ambient conditions.

11 Sound data

11 - 1 Sound Pressure Spectrum

FXLQ63P

4D034567A

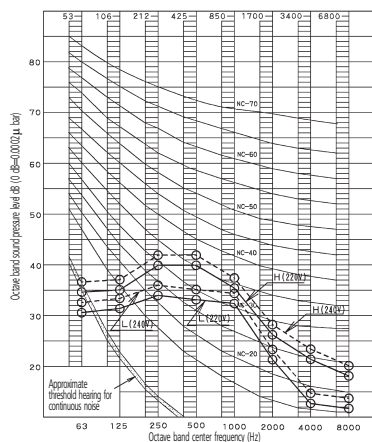

NOTES

- Over all (dB):
(B, G, N is already rectified)


Scale	220V		240V	
A	H	L	H	L
	40	35	42	37
C	45	39.5	47	41.5

- Measuring place: Anechoic chamber


- Operating conditions:

- Power source: 220•240V/220V 50/60Hz
- JIS standard

- Location of microphone



- Operating noise differs with operation and ambient conditions.



EEDEN23



01/2023



The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. / Daikin Central Europe HandelsGmbH. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH have compiled the content of this publication to the best of their knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.